

# ELEVATION CERTIFICATE

## FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No 3067 0077  
Expires May 31, 1993

**ATTENTION:** Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

### SECTION A PROPERTY INFORMATION

BUILDING OWNER'S NAME

DOUGLAS WEBSTER

STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER

12027 STATE RT. 66

OTHER DESCRIPTION (Lot and Block Numbers, etc.)

FOR INSURANCE COMPANY USE

POLICY NUMBER

COMPANY NAIC NUMBER

CITY

ST. MARYS

STATE

OHIO

ZIP CODE

45885

### SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION

Provide the following from the proper FIRM (See Instructions):

1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use dec. ft.)
<u>39011C</u>	<u>0080</u>	<u>C</u>	<u>9-6-89</u>	<u>A</u>	<u>867.0</u> (NONE PER F.I.R.M.)

7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): ☒ NGVD '29 ☐ Other (describe datum) SEE ATTACHED LETTER
8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: 867.0 feet NGVD (or other FIRM datum—see Section B, Item 7).

### SECTION C BUILDING ELEVATION INFORMATION

1. Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level: 2
- 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of 860.8 feet NGVD (or other FIRM datum—see Section B, Item 7).
- ☒ FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of        feet NGVD (or other FIRM datum—see Section B, Item 7).
- ☒ FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is        feet above        or below        (check one) the highest grade adjacent to the building.
- ☒ FIRM Zone AO. The floor used as the reference level from the selected diagram is        feet above        or below        (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? ☐ Yes ☐ No ☐ Unknown
3. Indicate the elevation datum system used in determining the above reference level elevations: ☒ NGVD '29 ☐ Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)
4. Elevation reference mark used appears on FIRM: ☐ Yes ☒ No (See Instructions on Page 4)
5. The reference level elevation is based on: ☒ actual construction ☐ construction drawings  
(NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)
6. The elevation of the lowest grade immediately adjacent to the building is: 865.9 feet NGVD (or other FIRM datum—see Section B, Item 7).

### SECTION D COMMUNITY INFORMATION

- ☒ If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:        feet NGVD (or other FIRM datum—see Section B, Item 7).
- ☒ Date of the start of construction or substantial improvement

# SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.



Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME GORDON L. GEESLIN LICENSE NUMBER (or Affix Seal) P. 5372  
 TITLE \_\_\_\_\_ COMPANY NAME GEESLIN LAND SURVEYING  
 ADDRESS 810 E. MARKET ST. CITY CELINA STATE OHIO ZIP 45885  
 SIGNATURE Mordon L. Musla DATE 10/17/94 PHONE (419) 586-6155

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: REFERENCE LEVEL FLOOR WAS THE FLOOR OF A 7' BASEMENT.

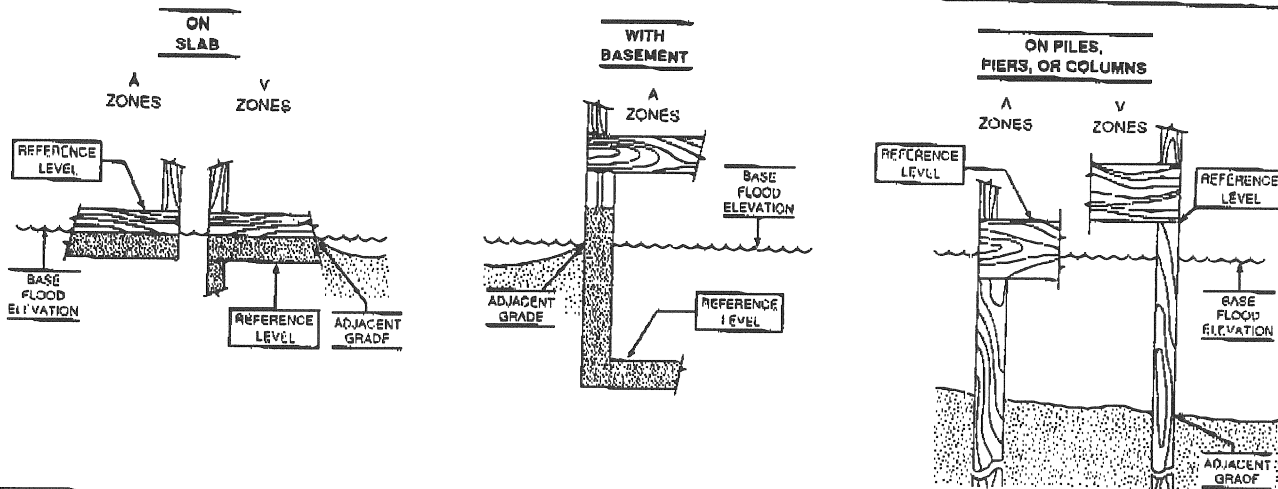

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones. Elevations for all A Zones should be measured at the top of the reference level floor. Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

**GORDON L. GEESLIN**


REGISTERED LAND SURVEYOR

PHONE 419-586-6198


October 17 , 1994

Doug Reinhart  
Auglaize Co. Engineer

Enclosed is the Elevation Certificate for Doug Webster. I have also done some rough measuring and located the house on the F.I.R.M. Although the F.I.R.M.'s scale is 1" = 1000' , I can be relatively sure that the house lies outside of zone A. I did however , fill out the Elevation Certificate assuming the house was in zone A. Apparently, the Township is telling Doug that his house is in the flood plane.

  
-----

Jim Geeslin

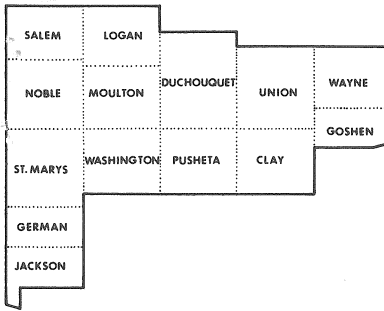

## *Auglaize County Sanitary Engineer*

1014 SOUTH BLACKHOOF STREET • WAPAKONETA, OHIO 45895

PH.(419)738-3219

DOUGLAS REINHART P.E.  
SANITARY ENGINEER



Gordon Geeslin  
St. Marys, Ohio

September 20, 1994

I just talked with a Doug Webster at 12027 SR# 66, just south of St. Marys and along Koop Creek. He is doing an addition to his home and needs a flood elevation certificate. I gave him your name and I am sure he is going to be getting in touch soon.

Based upon the 1992 study of the St. Marys River by the U.S. Soil Conservation Service, sheet 19/23, the 100-year flood elevation shown is 867.0. If their appear to be a problem with this elevation, please let me know and I will get in touch with ODOT and see if they have better data on the bridge on SR# 66.