

1
of one

Commencing at a monument box (found) at the northwest corner of the northwest quarter of said Section 9 and the centerline intersection of Lock Two Road and Tri-Township Road; thence, S 89° 08' 39" E along the centerline of Lock Two Road and the north line of the northwest quarter of the northwest quarter of said Section 9, for a distance of 1332.60 feet to a railroad spike (found) at the northwest corner of the northeast quarter of the northwest quarter of said Section 9, said spike being the POINT OF BEGINNING for the tract herein described;

thence, continuing along the aforesaid centerline of Lock Two Road and the north line of the northeast quarter of the northwest quarter of said Section 9, S 89° 11' 09" E for a distance of 230.00 feet to a railroad spike (found);

thence, S 00° 50' 57" W (passing through a 5/8" re-rod found marking the southerly right-of-way line of Lock Two Road at a distance of 25.00 feet, and passing the southwest corner of that parcel evidenced by Deed Volume 258, Page 310 at a distance of 257.00 feet) for a total distance of 282.00 feet to a 5/8" re-rod w/cap (set);

thence, S 88° 49' 47" E for a distance of 95.00 feet to a 5/8" re-rod w/cap (set);

thence, S 00° 43' 02" W for a distance of 337.11 feet to a 5/8" re-rod w/cap (set);

thence, N 89° 11' 09" W for a distance of 324.35 feet to a 5/8" re-rod w/cap (set) on the west line of the northeast quarter of the north-west quarter of said Section 9;


thence, N 00° 43' 02" E along the aforesaid west line (passing through a 5/8" re-rod w/cap set on the southerly right-of-way line of Lock Two Road at a distance of 594.70 feet to the POINT OF BEGINNING, containing therein 4.000 acres, of which 0.132 acres is road right-of-way.

I hereby certify that this survey
was performed under my direct super-
vision during May, 1997


James M. Kent, PS 6792 OH

L E G E N D

- ▣ MONUMENT BOX (FOUND)
- 5/8" RE-ROD (FOUND)
- ✕ RAILROAD SPIKE (FOUND)
- 5/8" RE-ROD W/CAP (6792) SET



GRAPHIC SCALE

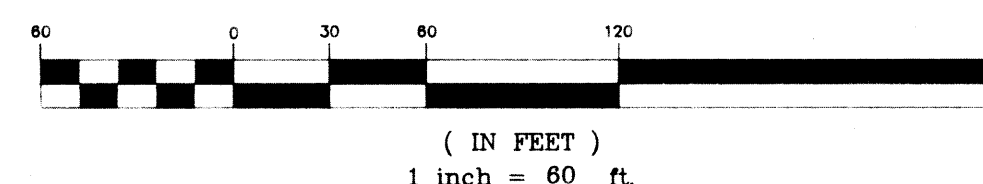

BASIS OF BEARINGS PER GPS; NW COR SEC 9 TO N. 1/4 CORNER @ S 89° 09' 54"E

kent
s u r v e y i n g

May 14, 1997
dwg. #2742 - acad dammyer

GER-9-1