


LOCATION SKETCH

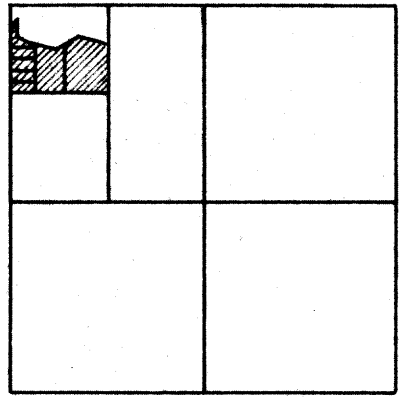

SECTION 13


LEGEND

- 'A' - MINE SPIKE FD.
- 'B' - 5/8" IRON BAR FD.
- 'C' - 8" STEEL POST FD @ NE COR -
W. 1/2 ~ NW 1/4 ~ SEC. 13.
- 'D' - MINE SPIKE SET.
- 'E' - 5/8" x 30" IRON BAR SET.
- 'F' - CONC. MON. FD - (R/W MON. @ T.S. ~
STA. 918+02.95


SURVEYED BY Gordon L. Geeslin
GORDON L. GEESLIN
REG. SURVEYOR No. 5372

NOTES

- 1) CURVE DATA FOR SR 66 OBTAINED FROM 1961 STATE R/W PLANS.
- 2) BEARING BASIS FROM ABOVE R/W PLANS.
- 3) REFERENCE IS MADE TO THE 6-24-30 SURVEY FOR KILL PERFORMED BY ME.
- 4) SANDKUHL RD. HAS NO R/W OF RECORD. R/W SHOWN IS AS OCCUPIED.

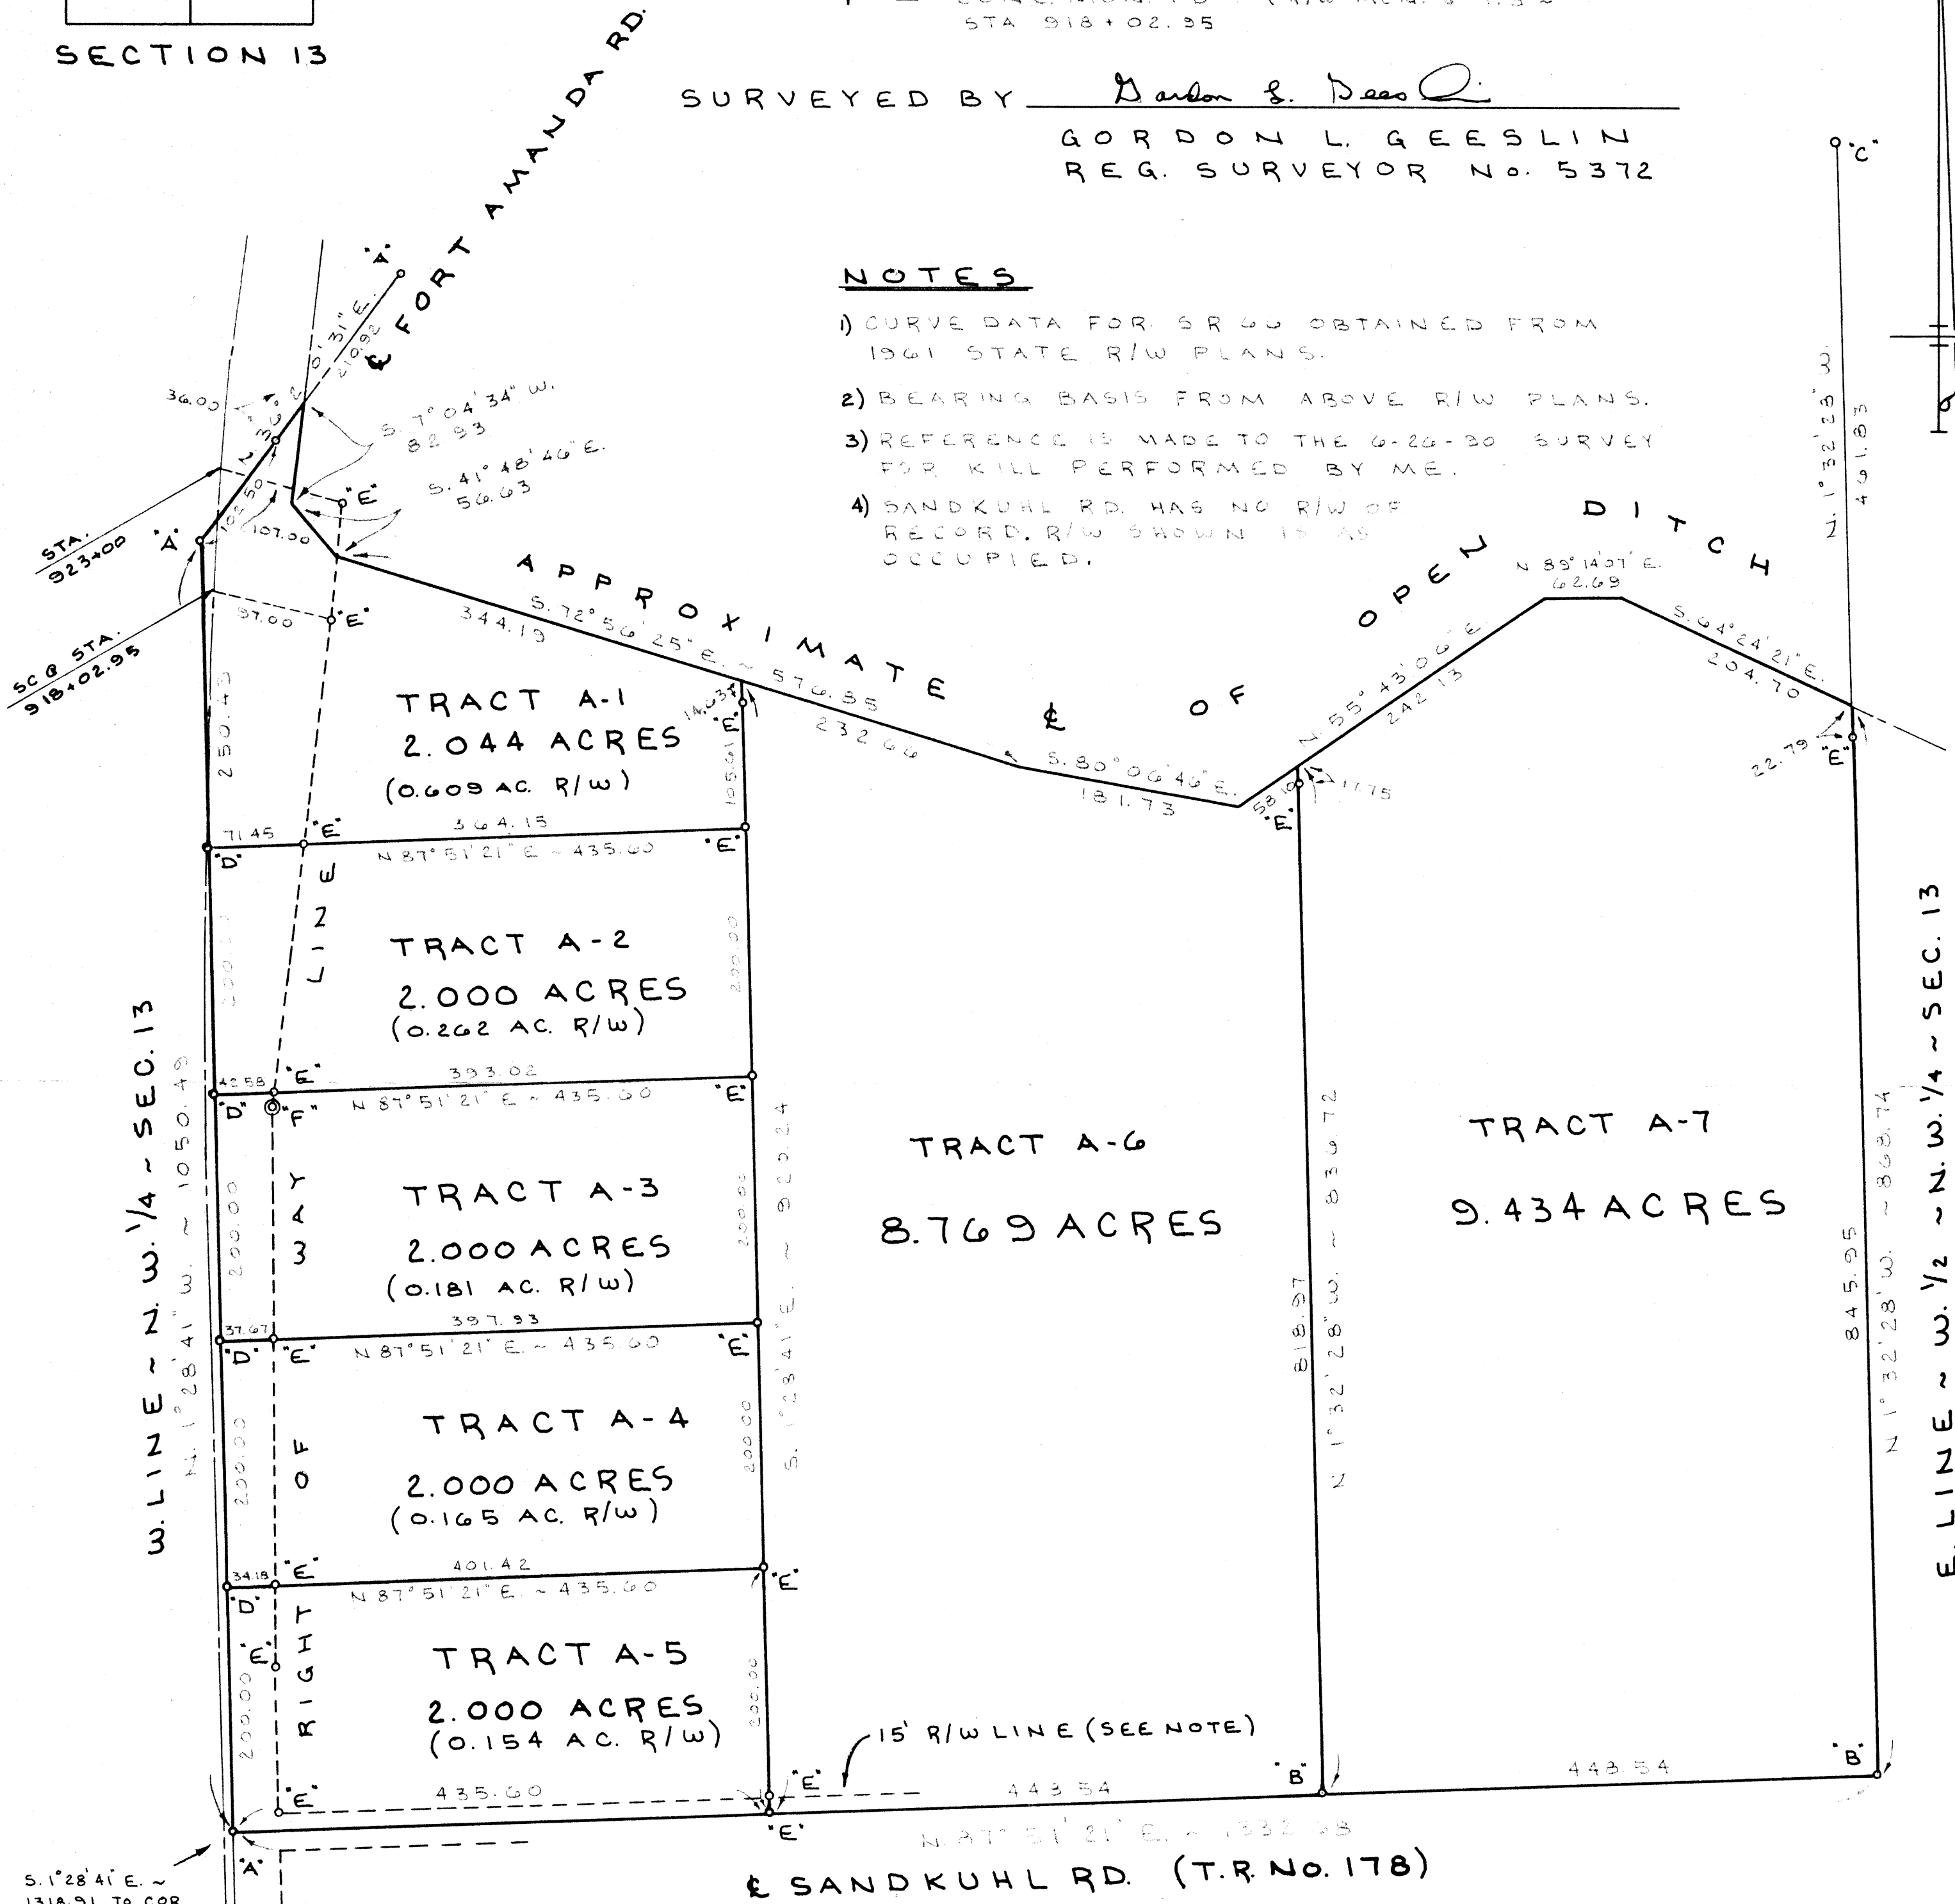

S. 1°28'41" E. ~
1318.91 TO COR.
STONE @ W. 1/4
POST SEC.
13

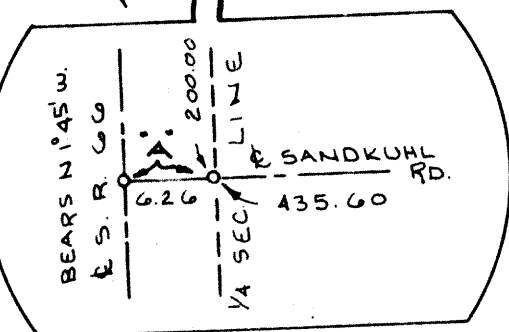


KILL SURVEY

PART OF THE W. 1/2 OF THE N.W. 1/4 OF SECTION 13, TOWN 5 SOUTH, RANGE 4 EAST, (NOBLE TOWNSHIP), AUGLAIZE COUNTY, OHIO.

APRIL 14, 1992

SCALE 1" = 100'



NB-13-2