


SEC. 32 SEC. 33 NORTH LINE OF SECTION 4 SEC. 33 SEC. 34
 SEC. 5 SEC. 4 S. 88° 53' 04" E. ~ 1882.58 S. 88° 53' 04" E. ~ 2452.14
 SEC. 4 SEC. 3

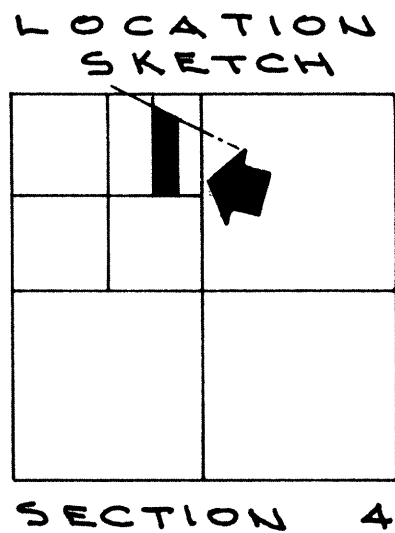

N

LEGEND

- "A" = STONE AT N.W. COR. SEC. 4 (SEE CO. ENGR.'S RECORDS.)
 "B" = IRON BAR AT N.E. COR. SEC. 4
 "C" = RAILROAD SPIKE FOUND
 "D" = CONC. MONUMENT FOUND.
 "E" = 10" CONC. CORNER POST.
 "F" = 5/8" IRON BAR FOUND.
 "G" = MINE SPIKE SET.
 "H" = 5/8" X 30" IRON BAR SET.

NOTES

1) THIS IS A RETRACING OF A SURVEY BY LOUIS TOLBERT, REG. SURVEYOR N° 5727, DATED SEPT., 1883. I FIND HIS CALLED FOR MONUMENTS ON THE SOUTH AND WEST LINES TO BE IN PLACE AND UNDISTURBED. I DO, HOWEVER, DIFFER WITH HIS LENGTH OF THE SOUTH LINE.

2) A RECENT SURVEY BY MICHAEL WEADOCK, REG. SURV. N° 6189, AND A DETERMINATION BY THE COUNTY ENGINEER PROVED THE NORTH LINE OF SEC. 4 INTERSECTS THE CENTERLINE OF STATE ROUTE 29 AT A POINT 617 FEET SOUTHEASTERLY THAN THOUGHT AT THE TIME OF THE OHIO DEPT. OF TRANS. SURVEY.

3) A SURVEY BY THOMAS COEVA, REG. SURVEYOR, N° 5341, DATED APRIL, 1970, DIFFERS WITH TOLBERT'S LOCATION OF THE SOUTH LINE 24' 0" E.

W. LINE ~ E. 1/2 ~ N.E. 1/4 ~ N.W. 1/4 ~ SEC. 4.
 U. 01° 20' 53" E. ~ 1214.01'

TRACT "A"
 4.433 ACRES

TRACT "B"
 5.065 ACRES

CITY OF ST. MARY.
 VOL. 221, PG. 663

HILLSDALE
 BAPTIST CHURCH
 VOL. 259, PG. 831

SURVEYED BY

Gordon L. Geeslin
 GORDON L. GEESLIN
 REGISTERED SURVEYOR
 N° 5372

AMERICAN HEALTH CARE SURVEY

PART OF THE EAST 1/2 ~ N.E. 1/4 ~ N.W. 1/4 OF SECTION 4, TOWN 6 SOUTH, RANGE 4 EAST (ST. MARY'S TWP.), AUGLAIZE COUNTY, OHIO.

NOVEMBER 7, 1989

SCALE 1" = 100'

GORDON L. GEESLIN

LAND SURVEYOR
 810 EAST MARKET STREET
 CELINA, OHIO
 PHONE (419) 586-6155



PERMANENT
 PARCEL No.

Part of: _____ Sec. _____ T. _____ R. _____ Township

Grantor: _____ Area Retained: _____ Acres

Grantee: _____ Area Transferred: _____ Acres

Deed References: _____

APPROVALS

AGENCY _____ Board of Health

DATE _____

County Sanitary Engineer

County Engineer

91-4-415