


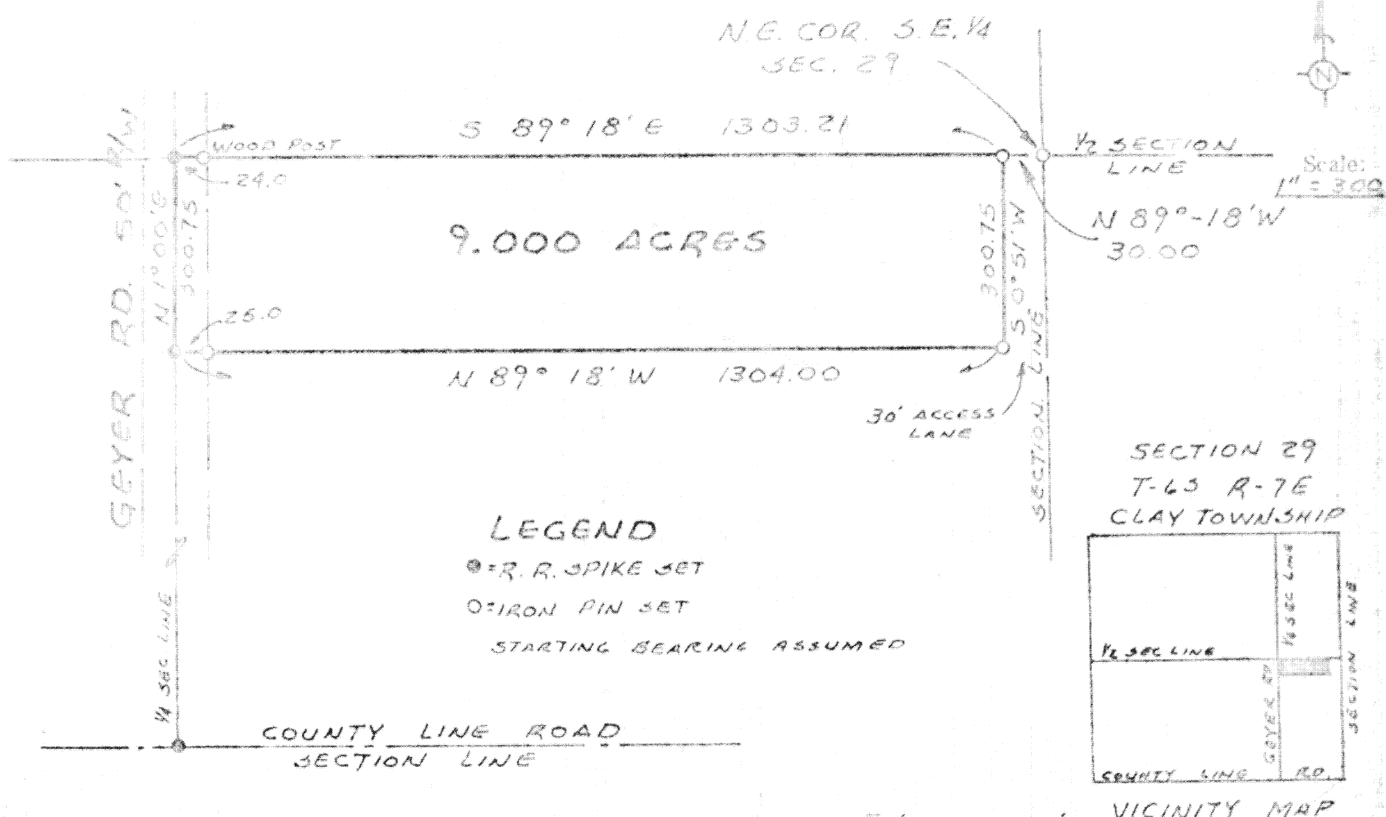

Being part of the south east quarter of Section 29, Town 6S, Range 7E, Clay Township, Auglaize County, Ohio, and being further described as follows:

Commencing at an iron pin at the north east corner of the south east quarter of Section 29 Thence North 89° 18' West, 30.00 feet to an iron pin and the place of beginning.

Thence South 0° 51' West, 300.75 feet to an iron pin.

Thence North 89° 18' West, 1304.00 feet to a railroad spike in the center of Geyer Road also being the quarter section line. Reference iron pin, 25.00 feet on last described line

Thence North 1° 00' East, 300.75 feet with the center of Geyer Road and the quarter section line to a railroad spike on the half section line of Section 29.

Thence South 89° 18' East, 1303.21 feet with the half section line to an iron pin and

The place of beginning. Containing 9.000 Acres and being subject to all legal easements and rights-of-way of record.



Thomas W Steinke

REG. SURVEYOR NO. S-6177

Signature by a representative of the County Engineer's Dept.
certifies that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Signature by a (representative of the) County Commissioner(s)
denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

THOMAS W. STEINKE
LAND SURVEYING
BOTKINS, OHIO

Client PAUL SCHAUB RR #2 Wapakoneta, Ohio
County AUGLAIZE Twp. CLAY Sec. 29
Drawn by JWS Scale 1" = 300' Drwg. No. 74-24
Checked by JWS Date 7-13-74
Sheet 1 of 1

(T 6 S, R 7 E)