

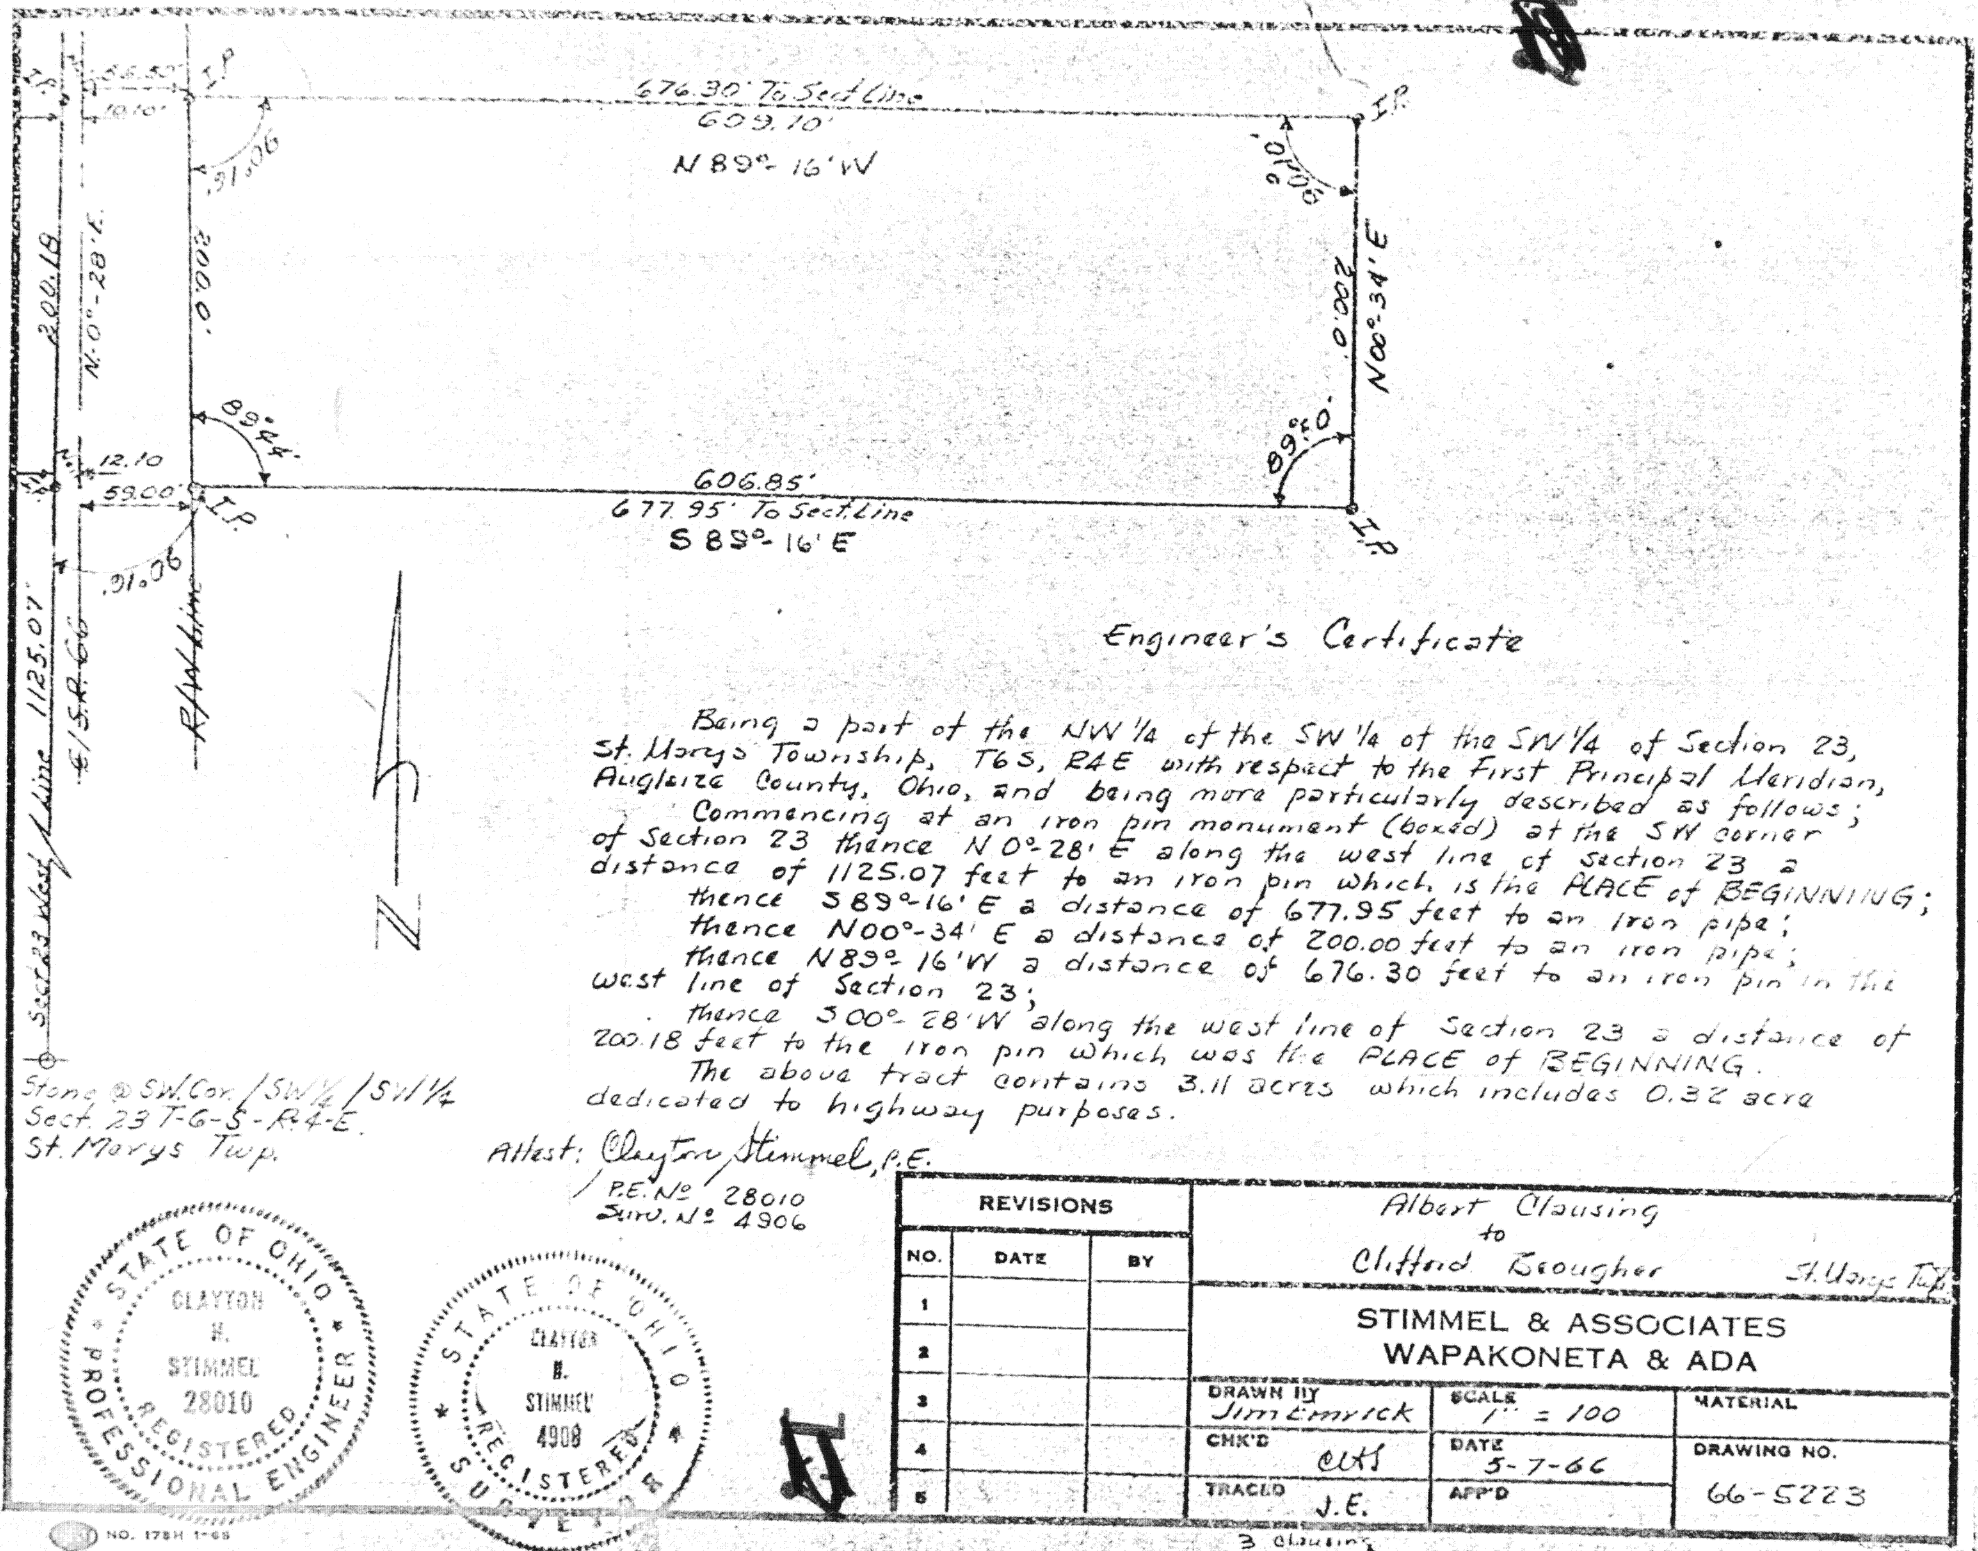


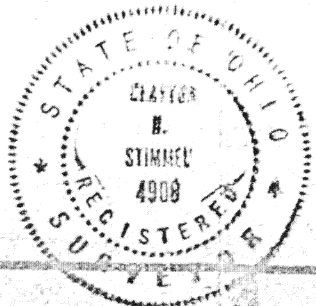

### Engineer's Certificate

Being a part of the NW 1/4 of the SW 1/4 of the SW 1/4 of Section 23, St. Marys Township, T6S, R4E with respect to the First Principal Meridian, Auglaize County, Ohio, and being more particularly described as follows;  
 Commencing at an iron pin monument (boxed) at the SW corner of Section 23 thence N 0°-28' E along the west line of Section 23 a distance of 1125.07 feet to an iron pin which is the PLACE of BEGINNING;  
 thence S 89°-16' E a distance of 677.95 feet to an iron pipe;  
 thence N 00°-34' E a distance of 200.18 feet to an iron pipe;  
 thence N 89°-16' W a distance of 606.85 feet to an iron pin in the west line of Section 23;  
 thence S 00°-28' W along the west line of Section 23 a distance of 200.18 feet to the iron pin which was the PLACE of BEGINNING.  
 The above tract contains 3.11 acres which includes 0.32 acre dedicated to highway purposes.

Attest: Clayton Stimmel, P.E.  
 P.E. No. 28010  
 Surv. No. 4906

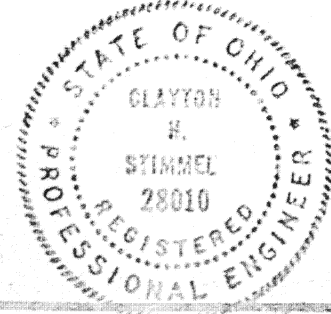

| REVISIONS |      |    | Albert Clausing<br>to<br>Clifford Brougher |                   |             |
|-----------|------|----|--------------------------------------------|-------------------|-------------|
| NO.       | DATE | BY | STIMMEL & ASSOCIATES<br>WAPAKONETA & ADA   |                   |             |
| 1         |      |    | DRAWN BY<br>Jim Emrick                     | SCALE<br>1" = 100 | MATERIAL    |
| 2         |      |    | CHK'D<br>CJS                               | DATE<br>5-7-66    | DRAWING NO. |
| 3         |      |    | TRACED<br>J.E.                             | APP'D             | 66-5223     |
| 4         |      |    |                                            |                   |             |
| 5         |      |    |                                            |                   |             |