
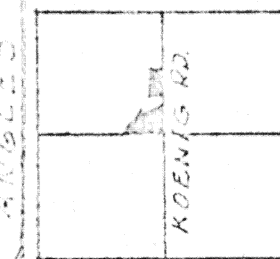


LEGEND


"A" = STONE F.D. @ N. 1/4 PT. SEC. 19 - PLACED 1/2 OVER (SEE CO. ENGR'S RECORDS)
 "B" = 1/2" IRON BAR F.D. @ CENTER OF SEC. 19 (SEE CO. ENGR'S RECORDS)
 "C" = 5/8" IRON BAR SET.

N. LINE OF SEC. 19 & E. NOBLE RD.

Scale: 1" = 100'

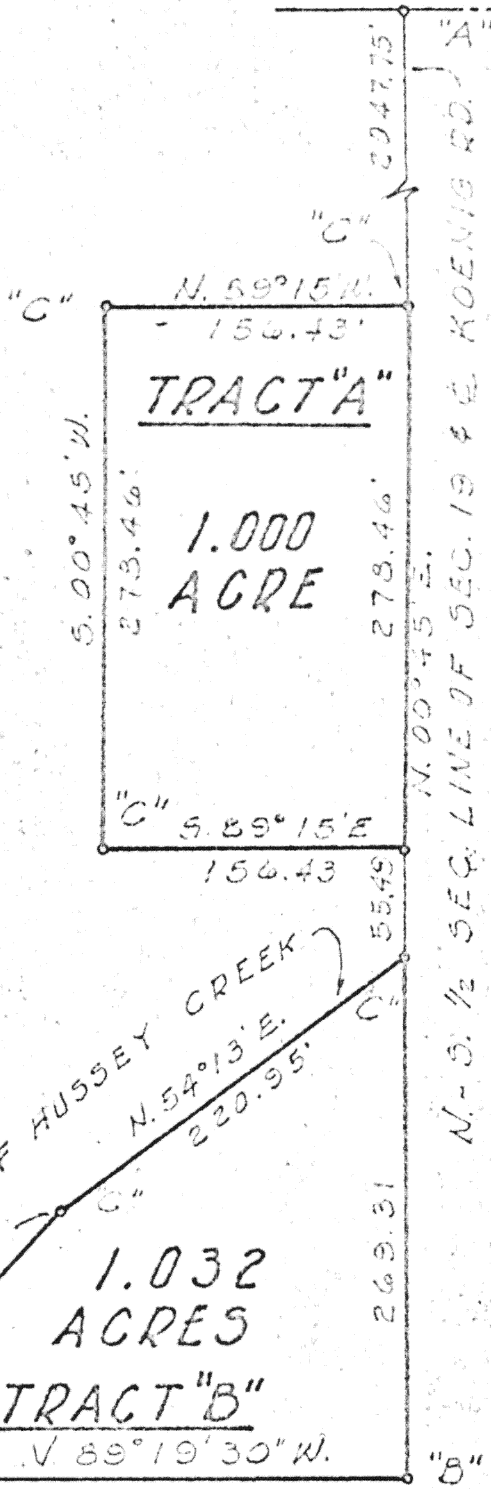

SURVEYED BY Gordon L. Geeslin
 GORDON L. GEESLIN
 REGISTERED SURVEYOR
 5372

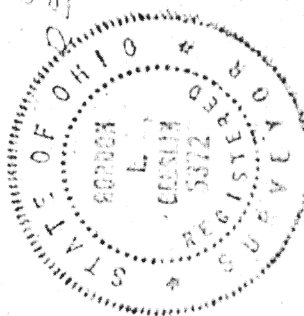

ADAMS SURVEY IN THE N.W. 1/4 OF
 SEC. 19, T. 5 S., R. 4 E. (NOBLE TWP),
 AUGLAIZE CO., OHIO. JUNE, 1974 SCALE 1" = 100'

Signature by a representative of the County Engineer's Dept.
 denotes that this plat meets tax map plat requirements.
 Signed: _____ Date _____

Signature by a (representative of the) County Commissioner(s)
 denotes approval of this plat.
 Signed: _____ Date _____

Signature by a representative of the County Health Dept.
 denotes compliance with Health Regulations.
 Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
 Planning Commission denotes approval of this plat.
 Signed: _____ Date _____

GORDON L. GEESLIN
 REG. SURV. 5372

Client GR. ADAMS
 County AUGLAIZE Twp. NOBLE Sec. 19
 Drawn by G.G. Scale 1" = 100' Drawn No. _____
 Checked by G.G. Date 6-14-74
 Sheet 1 of 3

4-A 232

232 (P. 5, S. 19, T. 5 N.)

4-k