



TOWN 6-S
RANGE 5-E
SECTION 24 (NE 1/4)
WASHINGTON TOWNSHIP
AUGLAIZE COUNTY
OHIO



Scale
1"=400'
SEC. LINE
CORNER POST

KOHLER ROAD (NO. 106 40' R/W)

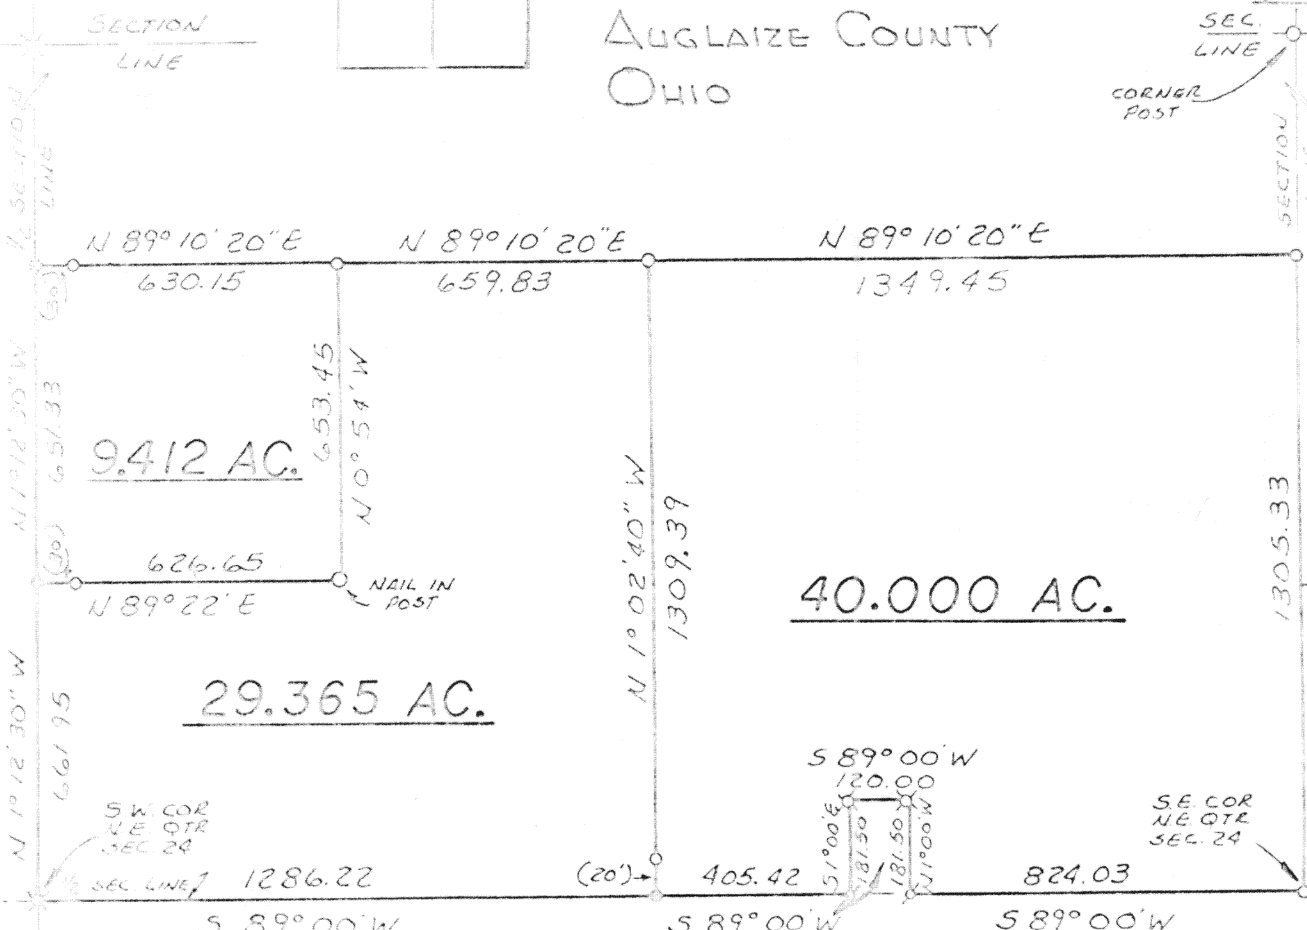

HEADAPOHL ROAD (NO. 106 40' R/W)

SURVEY BY THOMAS W. STEINKE
0.500 AC DATED: JAN 1975
FILE NO: 75-75

EAST R/W HEADAPOHL ROAD

LEGEND

- O IRON PIN SET
- X IRON PIN FOUND
- O R.R. SPIKE SET
- X R.R. SPIKE FOUND
- X P.K. NAIL FOUND

Thomas W. Steinke

Signature of a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Signature by a (representative of the) County Commissioner's denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

THOMAS W. STEINKE
LAND SURVEYING
279

Client NORMAN KANTNER R.R.#5 Wapakoneta
County AUGLAIZE Twp. WASHINGTON Sec 24 NE 1/4
Drawn by JWS Scale 1"=400' Drwg No. 15-84
Checked by _____ Date MARCH 15 1975
Sheet 1 of 4

279

DESCRIPTION OF 40.000 ACRES

Being part of the North-East quarter of Section 24, Town 6-S, Range 5-E, Washington Township, Auglaize County, Ohio and being further described as follows:

Commencing at the South-East corner of the North-East quarter of Section 24, this point marked by an iron pin. Thence South $89^{\circ} 00'$ West with the center of Headapohl Road and the half section line of Section 24, 824.03 feet to a P.K. Nail.

Thence North $1^{\circ} 00'$ West, 181.50 feet to an iron pin.

Thence South $89^{\circ} 00'$ West, 120.00 feet to an iron pin.

Thence South $1^{\circ} 00'$ East, 181.50 feet to a P.K. Nail.

Thence South $89^{\circ} 00'$ West, 405.42 feet to a railroad spike.

Thence North $1^{\circ} 02' 40''$ West, 1309.39 feet to an iron pin.

Thence North $89^{\circ} 10' 20''$ East, 1349.45 feet to an iron pin in the East section line of Section 24.

Thence South $1^{\circ} 02' 40''$ East with the East line of Section 24, 1305.33 feet to an iron pin and PLACE OF BEGINNING.

Containing 40.000 Acres and being subject to all legal easements and rights-of-way of record.

Headapohl Road being a 40 ft. R/W. Iron pin set on the R/W of said road on the property line.

Scale: _____

Thomas W Steinke



Survey and Description prepared by Thomas W. Steinke
Reg. Surveyor No. S - 6177

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.

Signed: _____ Date _____

Signature by a (representative of the) County Commissioner(s)
denotes approval of this plat.

Signed: _____ Date _____

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.

Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.

Signed: _____ Date _____

Client _____
County _____ Twp. _____ Sec. _____
Drawn by _____ Scale _____ Drwg. No. _____
Checked by _____ Date _____
Sheet 4 of 4

280

280

(T: R: E)

DESCRIPTION OF 29.365 ACRES



Scale: _____

Being part of the North-East quarter of Section 24, Town 6-S, Range 5-E, Washington Township, Auglaize County, Ohio and being further described as follows:

Commencing at a railroad spike at the South-West corner of the North-East quarter of Section 24, this point also being the PLACE OF BEGINNING.

Thence North $1^{\circ} 12' 30''$ West, 661.95 feet to a railroad spike in the center of Kohler Road and the half section line of Section 24.

Thence North $89^{\circ} 22'$ East, 626.65 feet to a nail in a corner post.

Thence North $0^{\circ} 54'$ West, 653.45 feet to an iron pin.

Thence North $89^{\circ} 10' 20''$ East, 659.83 feet to an iron pin.

Thence South $1^{\circ} 02' 40''$ East, 1309.39 feet to a railroad spike in the center of Headapohl Road and the half section line of Section 24.

Thence South $89^{\circ} 00'$ West, 1286.22 feet with said half section line and center of Headapohl Road to a railroad spike and PLACE OF BEGINNING.


Containing 29.365 Acres and being subject to all legal easements and rights-of-way of record.

Headapohl being a 40 ft. R/W.

Kohler Road Being a 60 ft. R/W.

Iron pins set in the R/W lines on the property lines

Thomas W. Steinke



Survey and description prepared by Thomas W. Steinke
Reg. Surveyor No. S - 6177

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.

Signed: _____ Date _____

Signature by a (representative of the) County Commissioner(s)
denotes approval of this plat.

Signed: _____ Date _____

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.

Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.

Signed: _____ Date _____

Client _____
County _____ Twp. _____ Sec. _____
Drawn by _____ Scale _____ Drwg. No. _____
Checked by _____ Date _____
Sheet 3 of 4

281

281

(T. W. R. P.)

Scale: _____

DESCRIPTION OF 9.412 ACRES

Being part of the North-East quarter of Section 24, Town 6-S, Range 5-E, Washington Township, Auglaize County, Ohio and being further described as follows:

Commencing at a railroad spike at the South-West corner of the North-East quarter of Section 24.

Thence North $1^{\circ} 12' 30''$ West with the center of Kohler Road and the half section line of Section 24, 661.95 feet to a railroad spike and PLACE OF BEGINNING for the tract of land herein described.

Thence North $1^{\circ} 12' 30''$ West with said Road and half section line, 651.33 feet to a railroad spike.

Thence North $89^{\circ} 10' 20''$ East, 630.15 feet to an iron pin.

Thence South $0^{\circ} 54'$ East, 653.45 feet to a nail in a corner post.

Thence South $89^{\circ} 22'$ West, 626.65 feet to a railroad spike in the center of Kohler Road and PLACE OF BEGINNING.

Containing 9.412 Acres and being subject to all legal easements and rights-of-way of record.

Kohler Road being a 60 ft. R/W. Iron pins set in the East R/W on the property lines.

Thomas W. Steinke



Survey and Description prepared by Thomas W. Steinke
Reg. Surveyor No. S - 6177

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Signature by a (representative of the) County Commissioner(s)
denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Client: _____
County: _____ Twp. _____ Sec. _____
Drawn by: _____ Scale: _____ Drwg. No. _____
Checked by: _____ Date: _____
Sheet 2 of 4 (T _____ S: R _____ E)