



OWNERS:  
H. & L. Stocker  
40 Ac.

Scale:  
1" = 50'

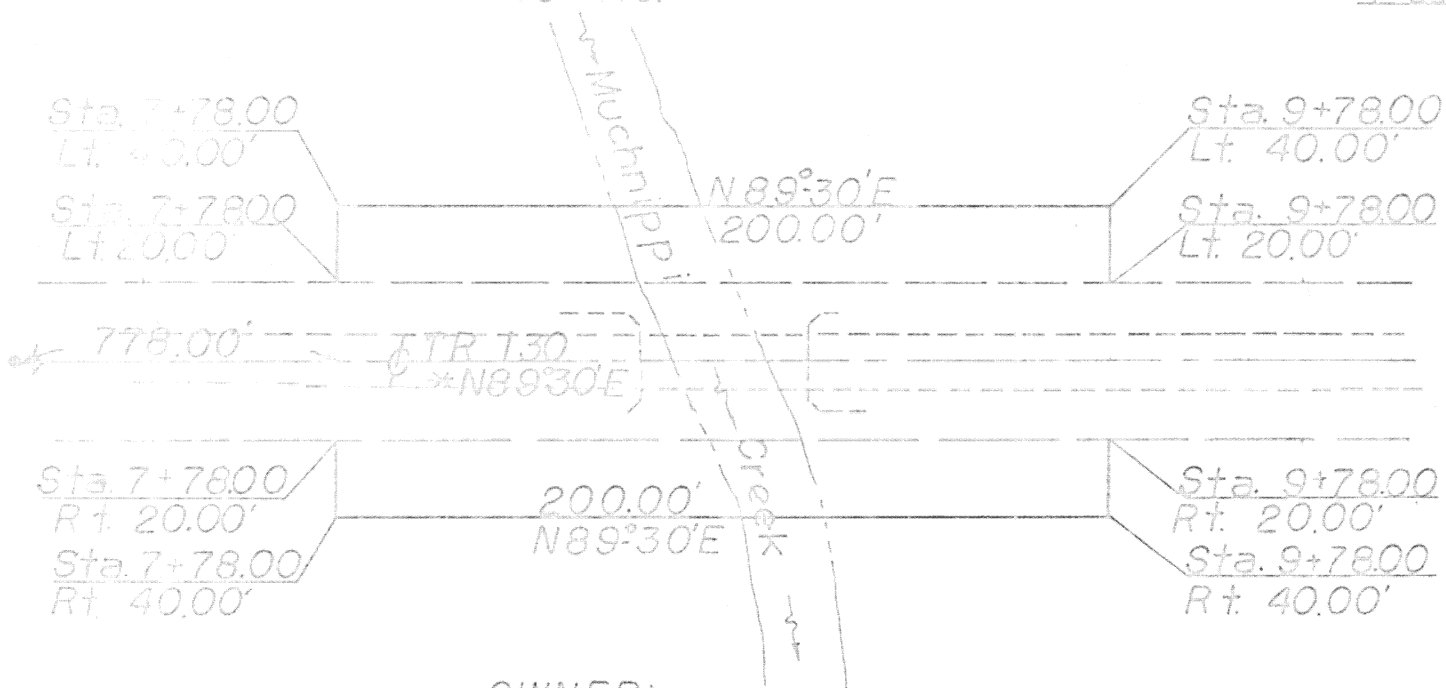

OWNER:  
H. & E. Cummins  
80 Ac.

\* Bearing assumed

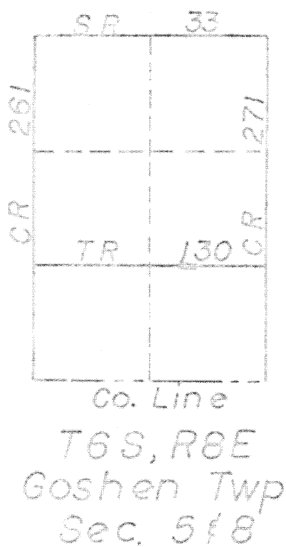

Signature by a representative of the County Engineer's Dept.  
denotes that this plat meets tax map plat requirements.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Signature by a (representative of the) County Commissioner(s)  
denotes approval of this plat.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Signature by a representative of the County Health Dept.  
denotes compliance with Health Regulations.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Signature by a representative of the Auglaize County Regional  
Planning Commission denotes approval of this plat.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Auglaize County  
Engineering Dept.  
Wapakoneta, Ohio

Client H. & L. Stocker, H. & E. Cummins  
County Auglaize Twp. Goshen Sec. 518  
Drawn by D. A. C. Scale 1" = 50' Draw. No. \_\_\_\_\_  
Checked by \_\_\_\_\_ Date 1975-09-22  
Sheet 1 of 2

DEED DESCRIPTION  
for  
PERMANENT RIGHT-OF-WAY  
from  
H. & L. STOCKER



Scale:

Situate in the southeast quarter of Section 5, Town 6 South, Range 8 East, with respect to the First Principal Meridian, Goshen Township, Auglaize County, Ohio, and more particularly described as follows:

Commencing at the southwest corner of the southeast quarter;  
thence N89°30'E with the centerline of TR 130 a distance of 778.00 feet to the PLACE OF BEGINNING;  
thence continuing N89°30'E with the centerline of TR 130 a distance of 200.00 feet;  
thence S00°30'W a distance of 40.00 feet;  
thence S89°30'W a distance of 200.00 feet;  
thence S00°30'E a distance of 40.00 feet to the PLACE OF BEGINNING.

All existing encumbrances shall have precedence over this right-of-way. The above tract of land contains 0.184 acres of which 0.092 acres is existing right-of-way.

The next previous recording is Vol. 195, Page 685.

Surveyed by the Auglaize County Engineering Dept., 1014 S. Blackhoof St., Wapakoneta, Ohio.

DEED DESCRIPTION  
for  
PERMANENT RIGHT-OF-WAY  
from  
H. & E. CUMMINS

Situate in the northeast quarter of Section 8, Town 6 South, Range 8 East with respect to the First Principal Meridian, Goshen Township, Auglaize County, Ohio, and more particularly described as follows:

Commencing at the northwest corner of the northeast quarter;  
thence N89°30'E with the centerline of TR 130 a distance of 778.00 feet to the PLACE OF BEGINNING;  
thence continuing N89°30'E with the centerline of TR 130 a distance of 200.00 feet;  
thence S00°30'E a distance of 40.00 feet;  
thence S89°30'W a distance of 200.00 feet;  
thence S00°30'W a distance of 40.00 feet to the PLACE OF BEGINNING.

The above tract of land contains 0.184 acres of which 0.092 acres is existing right-of-way.

The next previous recording is Vol. 218, Page 84.

Surveyed by Auglaize County Engineering Dept., 1014 S. Blackhoof Street, Wapakoneta, Ohio

Signature by a representative of the County Engineer's Dept.  
denotes that this plat meets tax map plat requirements.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Signature by a (representative of the) County Commissioner(s)  
denotes approval of this plat.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Signature by a representative of the County Health Dept.  
denotes compliance with Health Regulations.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Signature by a representative of the Auglaize County Regional  
Planning Commission denotes approval of this plat.  
Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Auglaize County  
Engineering Dept.  
Wapakoneta, Ohio

Client H. & L. Stocker; H. & E. Cummins  
County Auglaize Twp. Goshen Sec. 5 & 8  
Drawn by D. A. G. Scale \_\_\_\_\_ Drwg. No. \_\_\_\_\_  
Checked by \_\_\_\_\_ Date 1975-09-22  
Sheet 2 of 2 (16 S; R 8 E)

105

105