


LEGEND

- IRON PIN PLACED
- R.R. SPIKE PLACED
- ✕ R.R. SPIKE FOUND
- MAGNETIC BEARING

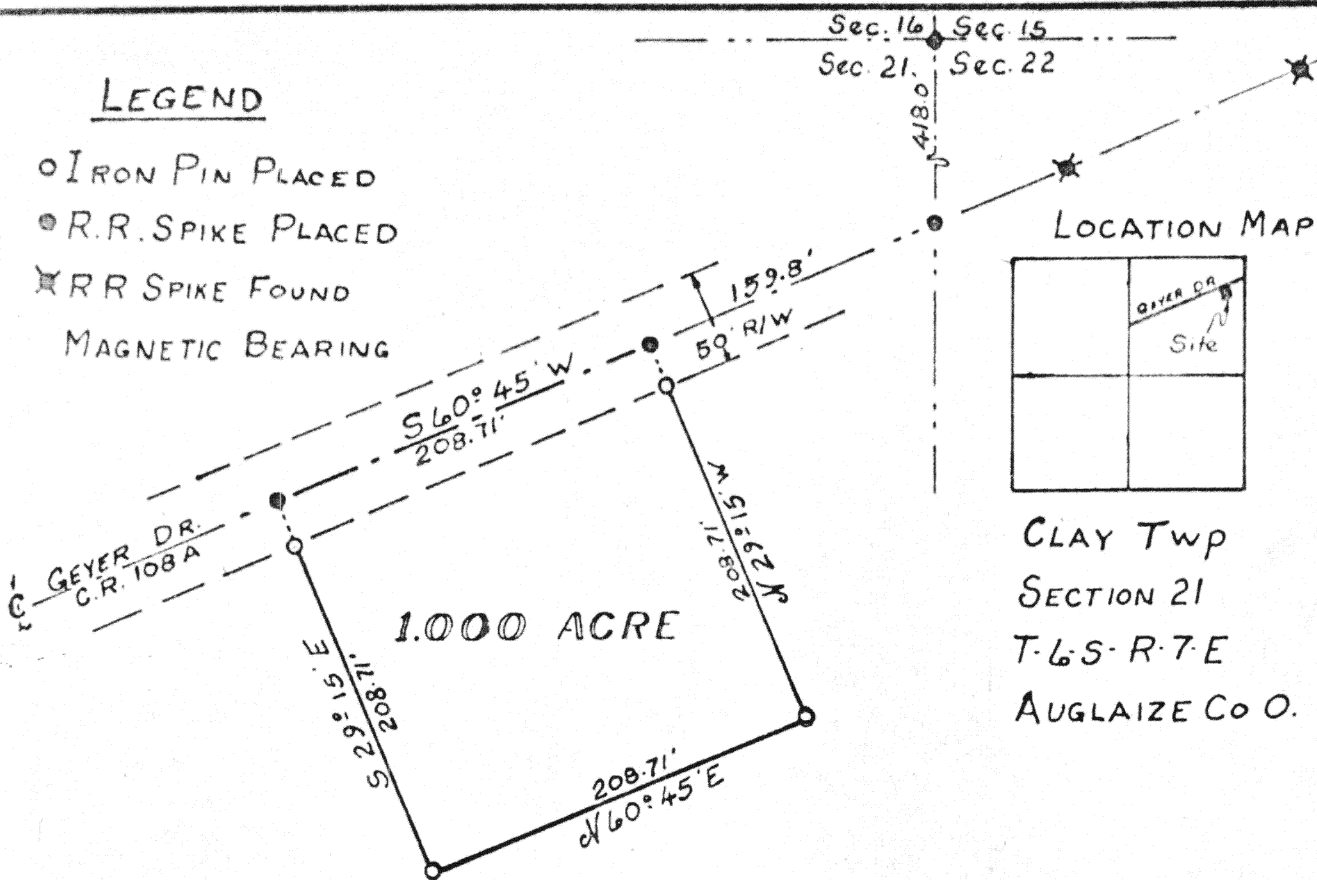

Scale: 1"=100'


CLAY Twp
SECTION 21
T-6-S-R-7-E
AUGLAIZE Co O.

Being 1.000 Acre located in the North East quarter of Section 21, Town 6-S, Range 7-E, Clay Township, Auglaize County, Ohio and being further described as follows:

Commencing at the North East corner of Section 21. Thence south with the East line of Section 21, a distance of 418.0 feet to a railroad spike set in the center of Geyer Drive Road CR # 108-A. Thence on a magnetic bearing of South 60° 45' West with the center of CR # 108-A, a distance of 159.80 feet to a railroad spike and PLACE OF BEGINNING for the tract of land herein described. Thence South 60° 45' West with said center line a distance of 208.71 feet to a railroad spike. Thence South 29° 15' East, passing through an iron pin at 25.0 feet, a total of 208.71 feet to an iron pin.. Thence North 60° 45' East, a distance of 208.71 feet to an iron pin. Thence North 29° 15' West, passing through an iron pin at 183.71 feet, total of 208.71 feet to a railroad spike and PLACE OF BEGINNING.

Containing in all 1.000 Acre and being subject to all legal easements and R/W of record.

Thomas W. Henke

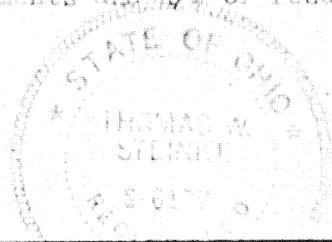

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

Signature by a (representative of the) County Commissioner(s) denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Thomas W. Henke
LAND SURVEYING
DAYTON, OHIO



Client NEIL SHROYER
County AUGLAIZE Twp. CLAY Sec. 21
Drawn by G.E.M. Scale 1"=100' Drwg. No. 76-214
Checked by _____ Date 3-17-76
Sheet 1 of 1

(T-6-S-R-7-E)