


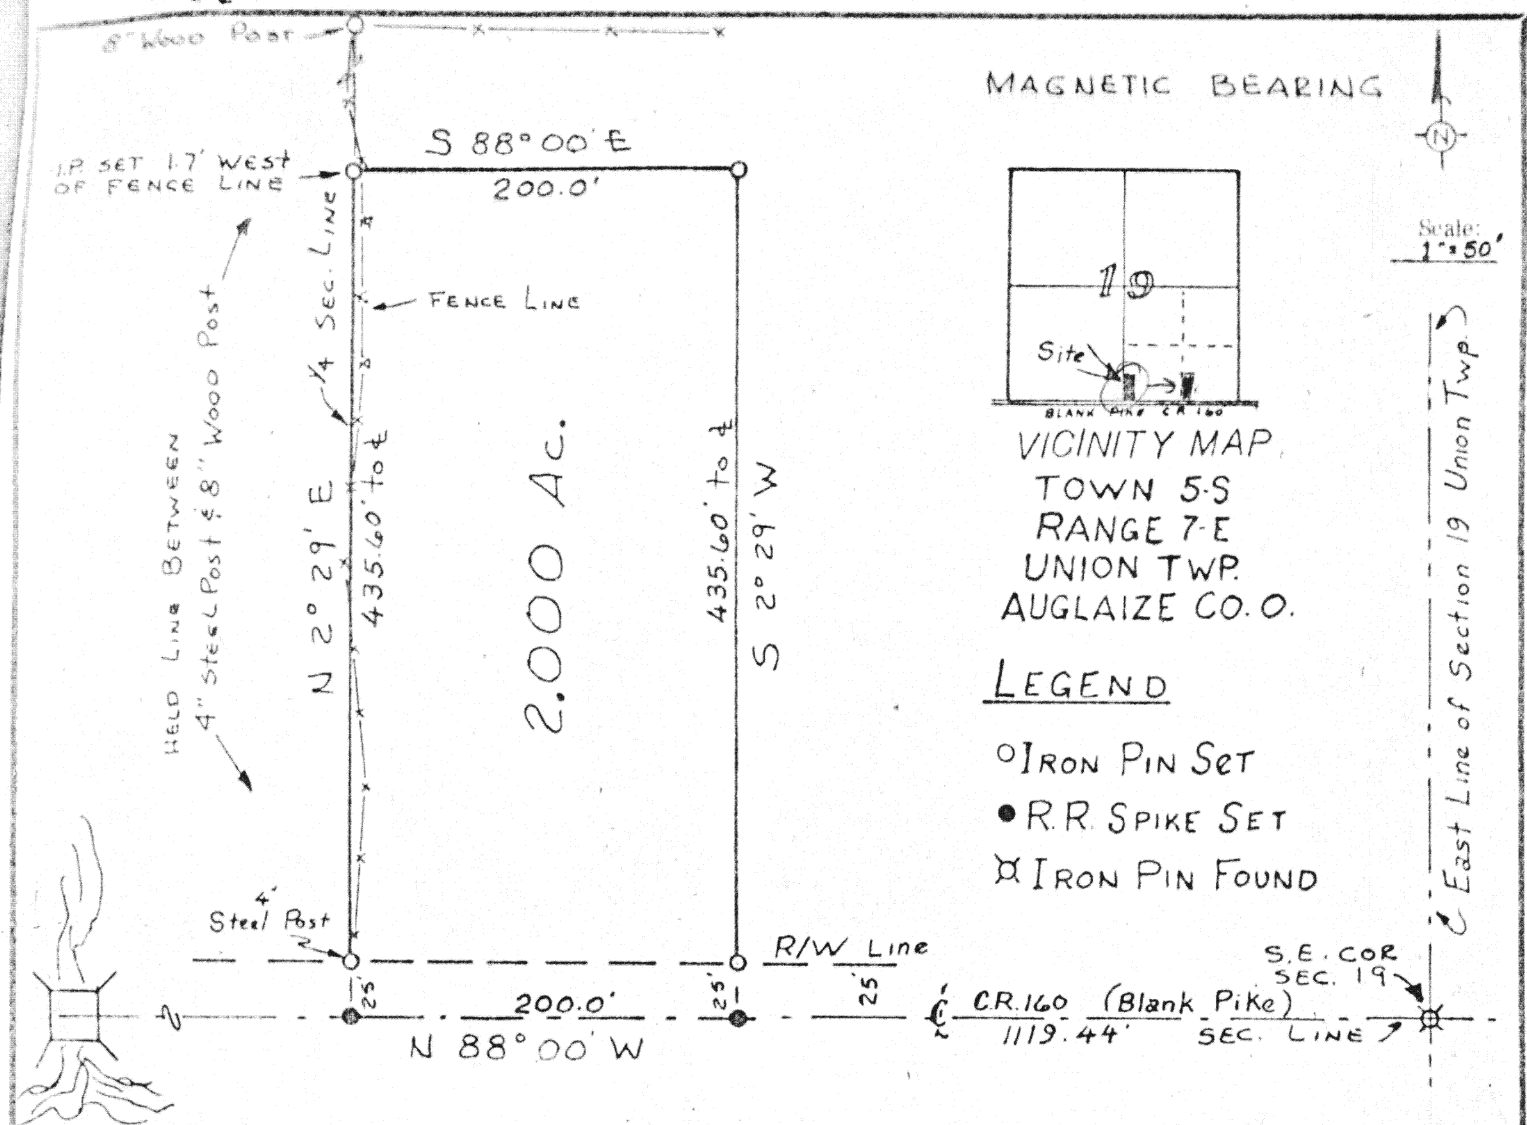

BEING 2.00 AC. LOCATED IN THE S.E. 1/4 OF SEC. 19, TOWN 5-S, RANGE 7-E, UNION TOWNSHIP, AUGLAIZE COUNTY, OHIO & BEING FURTHER DESCRIBED AS FOLLOWS:

COMMENCING AT THE S.E. CORNER OF SEC. 19, MARKED BY AN IRON PIN. THENCE N 88° 00' W WITH THE SOUTH LINE OF SEC. 19 & THE CENTER OF C.R. #160, BLANK PIKE, A DISTANCE OF 1119.44' FEET TO A RAILROAD SPIKE & PLACE OF BEGINNING.

THENCE CONTINUING N 88° 00' W, A DISTANCE OF 200.00 FEET TO A R.R. SPIKE

THENCE N 2° 29' E WITH THE 1/4 SEC. LINE, A DISTANCE OF 435.60 FEET TO AN IRON PIN.

THENCE S 88° 00' E, A DISTANCE OF 200.00 FEET TO AN IRON PIN.

THENCE S 2° 29' W, A DISTANCE OF 435.60 FEET TO A RAILROAD SPIKE & PLACE OF BEGINNING.

CONTAINING IN ALL 2.00 AC & SUBJECT TO 0.11 AC IN ROAD R/W

SURVEY & DESCRIPTION PREPARED BY THOMAS W. STEINKE #6177

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

Signature by a representative of the County Commissioner(s) denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date _____

LAND SURVEYING
TAYLOR & HUTCHINS, OHIO



Client ROSS HUNT 826 BARBRA LANE Wapak Ohio
County AUGLAIZE Twp. UNION Sec. 19
Drawn by G.E.M. Scale 1" = 50' Drwg. No. 76-186
Checked by _____ Date 1-21-76
Sheet 1 of 1

(T 5 S R 7 E)