



LEGEND

- IRON PIN PLACED
- R.R. SPIKE PLACED
- ✕ R.R. SPIKE FOUND
- MAGNETIC BEARING

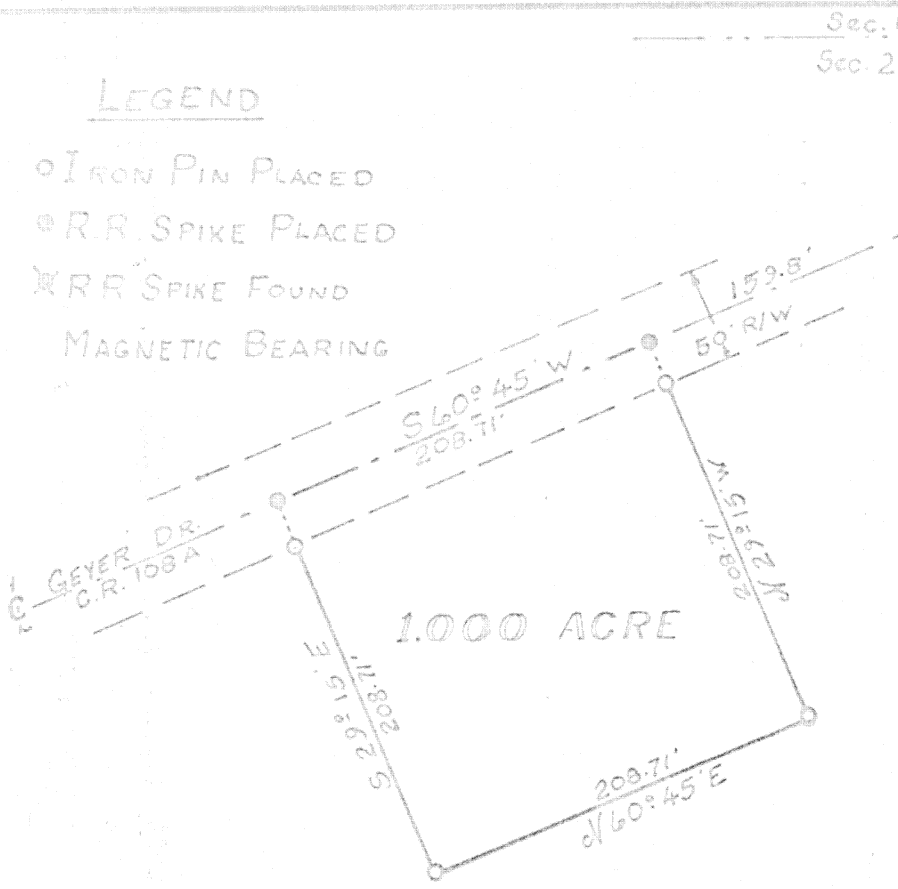

LOCATION MAP



Scale: 1"=100'

CLAY Twp
SECTION 21
T-6-S-R-7-E
AUGLAIZE Co O.

Being 1.000 Acre located in the North East quarter of Section 21, Town 6-S, Range 7-E, Clay Township, Auglaize County, Ohio and being further described as follows:
Commencing at the North East corner of Section 21. Thence south with the East line of Section 21, a distance of 417.0 feet to a railroad spike set in the center of Geyer Drive C.R. 108A. Thence on a magnetic bearing of South 60° 45' West with the center of C.R. 108A, a distance of 159.8 feet to a railroad spike and thence on a magnetic bearing of South 60° 45' West with said center line a distance of 208.71 feet to a railroad spike. Thence South 60° 45' West, passing through an iron pin at 117.802 feet, a total of 326.51 feet to an iron pin. Thence North 60° 45' East, a distance of 208.71 feet to an iron pin. Thence North 60° 45' West, passing through an iron pin at 117.802 feet, total of 326.51 feet to a railroad spike and thence North 60° 45' East, a distance of 117.802 feet to the North East corner of Section 21.

Containing in all 1.000 Acre and being subject to all local ordinances and W. of record.

Thomas W. Shroyer

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Signature by a (representative of the) County Commissioner(s) denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Client NEIL SHROYER
County AUGLAIZE Twp. CLAY Sec. 21
Drawn by G.E.M. Scale 1"=100' Draw. No. 76-214
Checked by _____ Date 3-17-76
Sheet 1 of 1