


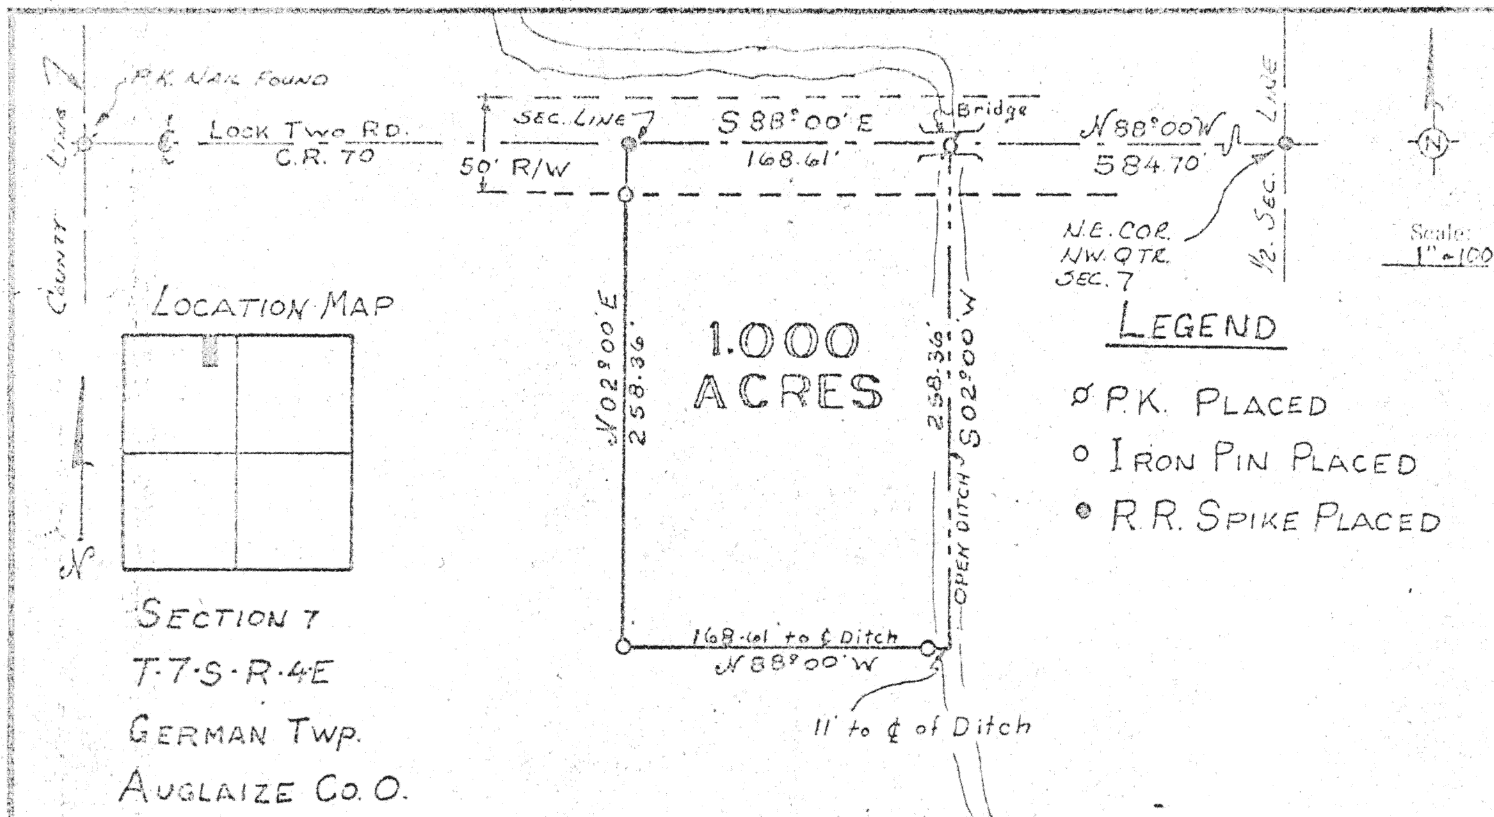

DESCRIPTION OF 1.000 ACRES

Being part of the North - West quarter of Section 7, Town 7 - South, Range 4 - East, German Township, Auglaize County, Ohio and being further described as follows:

Containing a Railroad spike located at the North West corner of the North West quarter of Section 7. Thence North 88° 00' West with the center of Lock Two Road C.R. 70 and the north line of Section 7, a distance of 584.70 feet to a P.K. nail and PLACE OF BEGINNING. Thence South 22° 00' West (Magnetic Bearing), with the center of an open ditch, 258.36 feet to a point. Thence North 88° 00' West, passing through an iron pin at 11.00 feet, a total of 168.61 feet to an iron pin. Thence North 22° 00' East, passing through an iron pin at 238.36 feet, a total of 258.36 feet to a railroad spike in the center of Lock Two Road. Thence South 88° 00' East with the center of said road, 168.61 feet to a P.K. nail in the center of a bridge and PLACE OF BEGINNING.

Containing in all 1.000 Acres

Subject to all legal encumbrances and R/W of record

Thomas W. Steinke



Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Signature by a representative of the County Commissioner(s) denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Thomas W. Steinke
SURVEYING
VAPASO, R. L. & BOYLANDS, OHIO



Client FELIX E. KREMER RR#1 NEW BREMEN, O
County AUGLAIZE Twp. GERMAN Sec. 7
Drawn by G.E.M. Scale 1" = 100' Drawg. No. 76-204
Checked by _____ Date 3-6-76
Sheet 1 of 1