



RECORDED IN SURVEY BOOK B, PAGE 278, AT AUGLAIZE CO. ENG. OFFICE

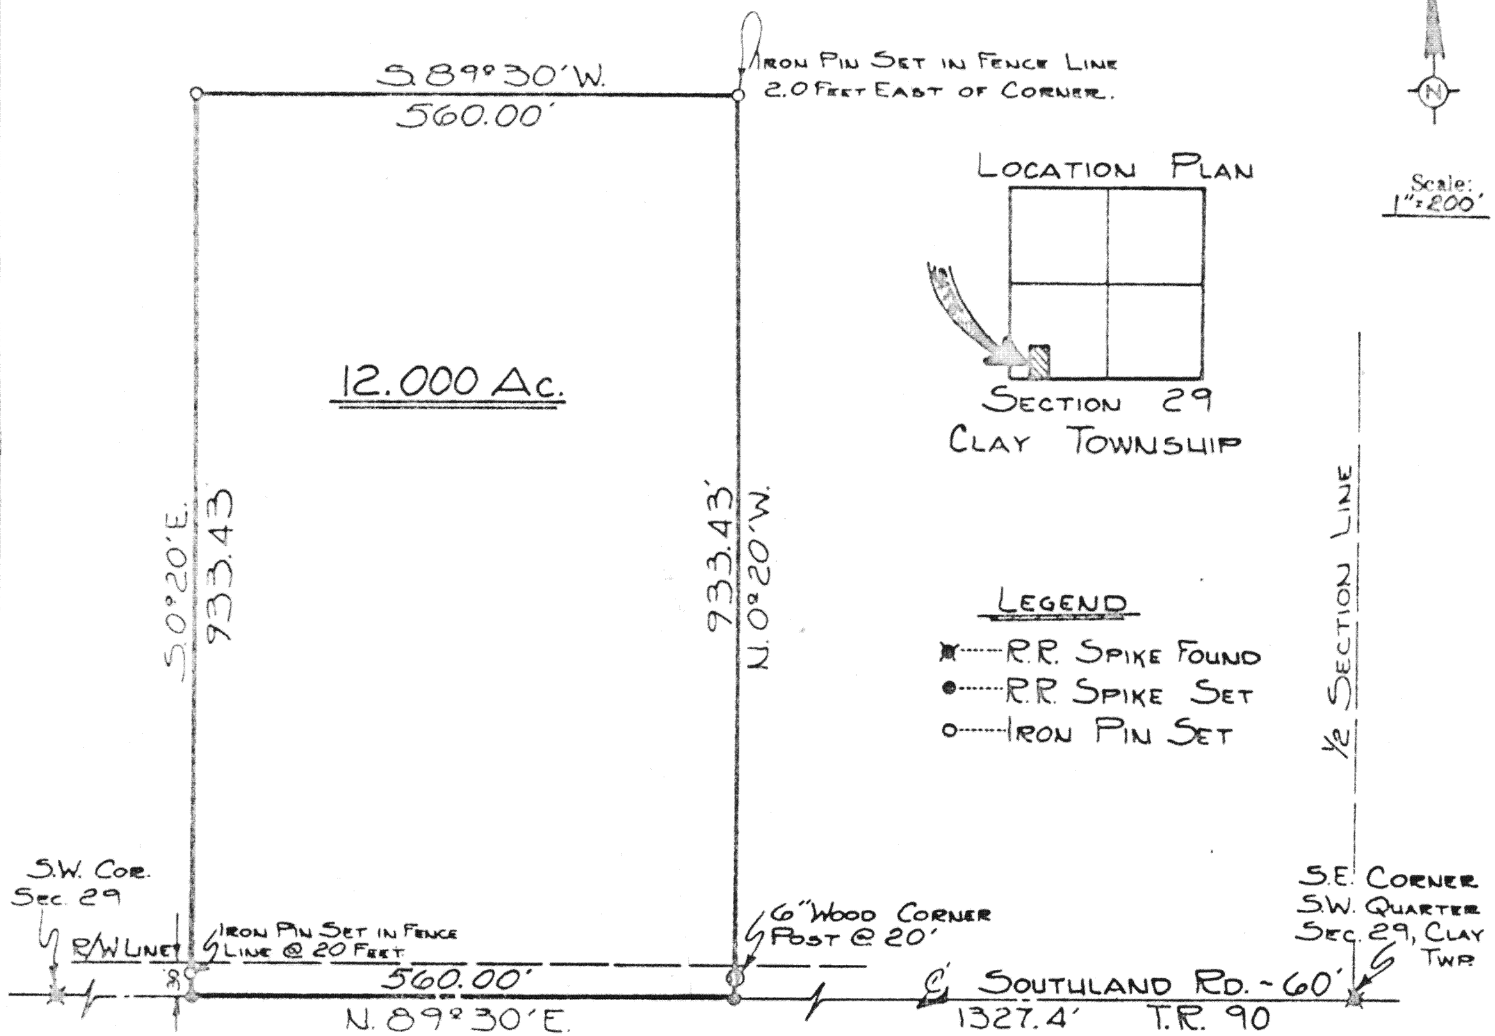

Being 12.000 Acres located in the S.W. quarter of Section 29, T-6-S, R-7-E, Clay Township, Auglaize County, Ohio and being further described as follows: Commencing at a railroad spike located at the S.E. corner of the S.W. $\frac{1}{4}$ of Section 29. Thence with a magnetic bearing S 89° 30' W, along the center of Southland Road-T.R.# 90 and the south line of Section 29, a distance of 1327.4 feet to a railroad spike and PLACE OF BEGINNING. Thence N 00° 20' W, a distance of 933.43 feet to a point. Thence S 89° 30' W, a distance of 560.00 feet to an iron pin. Thence S 00° 20' E, a distance of 933.43 feet to a railroad spike in the center of T.R.# 90 and the south line of Sec. 29. Thence N 89° 30' E, along the center of T.R.# 90, a distance of 560.00 feet to a railroad spike and PLACE OF BEGINNING. Containing in all 12.000 Acres Survey recorded in Survey Book "B" Page 278 of the Auglaize County Survey Records.

Survey and description prepared by Thomas W. Steinke # 6177

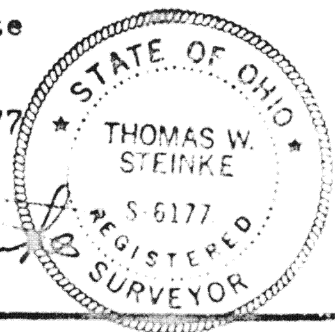

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of City with 3 mile limit jurisdiction or Twp. Trustees or Village with zoning jurisdiction denotes approval of this plat. Signed: _____ Date: _____
for political S. D. of: _____

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Client DENNIS GEYER
County AUGLAIZE Twp. CLAY Sec. 29
Drawn by JOHN J. Scale 1"=200' Drwg. No. 7225
Checked by _____ Date JUNE 21st, 1976
Sheet 1 of 1

Thomas W. Steinke
LAND SURVEYING
HAWAII & BUTAINS, OHIO

(T 6 S; R 7 E)