


THIS SURVEY IS RECORDED IN BOOK "C" PAGE 139 AT AUGLAIZE CO ENG OFF.



Scale:
1" = 100'

LOCATION MAP



PUSHETA TWP
SECTION 7 N/E 1/4
T-6-S-R-6-E
AUGLAIZE CO.O.

I.P. SET S 87° 59' E 210.0' I.P. SET

N 02° 05' E 622.29' Tot

3.000 AC.

S 02° 05' W 622.29' Tot

1/2 SEC. LINE

IRON PIN 26.0' 2' OWL CREEK RD T.R. 126


N 87° 59' W 210.0'

IRON BAR 25.0'

40' R/W 20' 1/2 R/W

664.20'

SHARDIN WAPAK ROAD
SEC. LINE

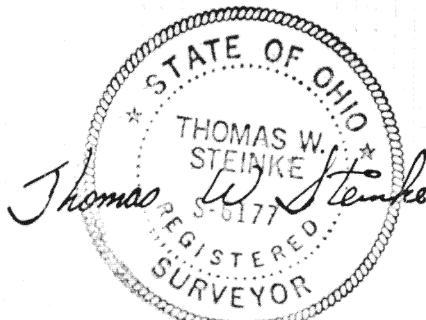

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

139 THOMAS W. STEINKE
Land Surveying
106 Park Street
Wapakoneta, Ohio 45

Client Bob HARROD
County AUGLAIZE Twp. PUSHETA Sec. 7
Drawn by G.E.M. Scale 1" = 100' Drwg. No. 77-235 455
Checked by [Signature] Date JULY 6 1977
Sheet _____ of _____
(T 6 S; R 6 E)

139

THOMAS W. STEINKE

LAND SURVEYING



PHONE 419 738-7421

106 PARK ST.
WAPAKONETA, OHIO 45995

DESCRIPTION OF 3.000 ACRES

Being 3.000 Acres located in the north-east quarter of Section 7, Town 6-S, R-6-E, Pusheta Township, Auglaize County, Ohio and being further described as follows:

Commencing at the south-east corner of the north-east quarter of Section 7, said point being marked with a railroad spike.

Thence west with the center line of Owl Creek Road (T.R.# 126) and the east-west half section line of Section 7, a distance of 664.20 feet to a railroad spike and PLACE OF BEGINNING for the tract of land herein described:

Thence continuing west with said center line and half section line, North $87^{\circ} 59'$ West, a distance of 210.00 feet to a railroad spike.

Thence North $02^{\circ} 05'$ East, a distance of 622.29 feet to an iron pipe, passing through an iron pipe at 25.0 feet.

Thence South $87^{\circ} 59'$ East, a distance of 210.00 feet to an iron pipe set.

Thence South $02^{\circ} 05'$ West, a distance of 622.29 feet to a railroad spike in the center line of T.R.# 126 and the PLACE OF BEGINNING, passing through an iron pipe set at 597.29 feet.

Containing in all 3.000 Acres and being subject to all legal easements and rights-of-way of record.

Survey and description prepared by Thomas W. Steinke, registered surveyor # 6177 and being recorded in Survey Book "C" Page 139 of the Auglaize County Survey Records.

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of City with 3 mile limit jurisdiction or Twp. Trustees or Village with zoning jurisdiction denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date _____

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

140 THOMAS W. STEINKE
Land Surveying
106 Park Street
Wapakoneta, Ohio 45

Client Bob HARROD
County AUGLAIZE Twp. PUSHETA Sec. 7
Drawn by G.E.M. Scale 1" = 100 Drwg. No. 77-33453
Checked by Las Date JULY 6 1977
Sheet _____ of _____ (T 6 S; R 6 E) 140