
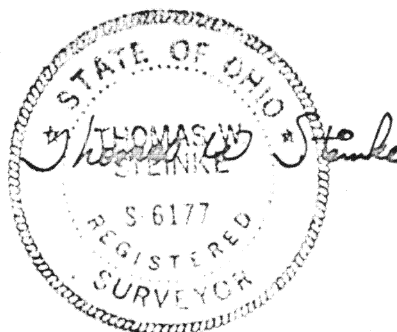


REF:
SURVEY BOOK "A" SEC. 24
PAGE 279



Scale:
1" = 100'

R.R. SPIKE

N 89° 10' 20" E

630.15

Post

N 01° 12' 30" W

325.78

4.706 ACRES

(0.224 AC IN ROAD R/W)

325.78

S 0° 54' E

R.R. SPIKE

S 89° 10' 20" W

628.38

I.P.

(30') N 89° 10' 20" E

628.38

KOHLER ROAD #125

N 01° 12' 30" W

325.55

4.706 ACRES

(0.224 AC. IN ROAD R/W)

327.67

S 0° 54' E

R.R. SPIKE

(30')

I.P.

S 89° 22' W

626.65

Post

N 01° 12' 30" W

661.95

S.W. COR. N.E. QTR
SEC. 24

HEADAPohl ROAD #106

SURVEY BOOK "C"
PAGE 161

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

THOMAS W. STEINKE
Land Surveying
103 Park Street
Wapakoneta, Ohio 45395

Client ROGER HOWE
County AUGLAIZE Twp. WASHINGTON Sec. 24 NE 1/4
Drawn by JWS Scale 1" = 100' Drwg. No. 77-466
Checked by _____ Date July 1977
Sheet _____ of _____ (T 6 S: R 5 E)

161

161

THOMAS W. STEINKE

LAND SURVEYING



PHONE 419 738-7421

106 PARK ST.
WAPAKONETA, OHIO 45995

DESCRIPTION OF 4.706 ACRES

Being 4.706 Acres located in the north-east quarter of Section 24, Town 6-S, Range 5-E, Washington Township, Auglaize County, Ohio and being further described as follows:

Commencing at the south-west corner of the north-east quarter of Section 24, said point being marked by a railroad spike.

Thence North $01^{\circ} 12' 30''$ West with the north-south half section line and the center of Kohler Road # 125, a distance of 987.50 feet to a railroad spike and PLACE OF BEGINNING for the tract of land herein described:

Thence continuing North $01^{\circ} 12' 30''$ ~~West~~ with half section line and center line, a distance of 325.78 feet to a railroad spike.

Thence North $89^{\circ} 10' 20''$ East, a distance of 630.15 feet to a corner post.

Thence South $00^{\circ} 54'$ East, a distance of 325.78 feet to a iron pipe

Thence South $89^{\circ} 10' 20''$ West, a distance of 628.38 feet to a railroad spike and PLACE OF BEGINNING.

Containing in all 4.706 Acres and being subject to all legal easements and R/W of record.

Survey and description prepared by Thomas W. Steinke, registered surveyor # 6177 and recorded in Survey Book "C" Page 161 of the Auglaize County Survey Records.

THOMAS W. STEINKE

LAND SURVEYING



PHONE 419 738-7421

106 PARK ST.
WAPAKONETA, OHIO 45395

DESCRIPTION OF 4.706 ACRES

Being 4.706 Acres located in the north-east quarter of Section 24, Town 6-S, Range 5-E, Washington Township, Auglaize County, Ohio and being further described as follows:

Commencing at the south-west corner of the north-east quarter of Section 24, said point being marked by a railroad spike.

Thence North $01^{\circ} 12' 30''$ West with the north-south half section line and the center of Kohler Road # 125, a distance of 661.95 feet to a railroad spike and PLACE OF BEGINNING for the tract of land herein described:

Thence continuing North $01^{\circ} 12' 30''$ ~~West~~ with half section line and center line, a distance of 325.55 feet to a railroad spike.

Thence North $89^{\circ} 10' 20''$ East, a distance of 628.38 feet to a iron pipe.

Thence South $00^{\circ} 54'$ East, a distance of 327.67 feet to a corner post.

Thence South $89^{\circ} 22'$ West, a distance of 626.65 feet to a railroad spike and PLACE OF BEGINNING.

Containing in all 4.706 Acres and being subject to all legal easements and R/W of record.

Survey and description prepared by Thomas W. Steinke, registered surveyor # 6177 and recorded in Survey Book "C" Page 161 of the Auglaize County Survey Records.