


THIS SURVEY IS RECORDED IN BOOK "C" PAGE 209 OF THE AUGLAIZE
COUNTY ENGINEERS OFFICE

MERCER COUNTY LINE
AUGLAIZE COUNTY LINE

DEED BOOK
217
Pg. 91

Scale:
1" = 60'

LOCATION SITE




N 15° 19' E
487.98' TO E2

2.50 ACRE

NOBLE TWP
SECTION 30 N/W 1/4
T-5-S-R-4-E
AUGLAIZE CO. OHIO

LEGEND

- R.R. SPIKE SET
- ✕ R.R. SPIKE FOUND
- IRON PIN SET
- ✕ IRON PIN FOUND
- ⊙ R/W MONUMENT

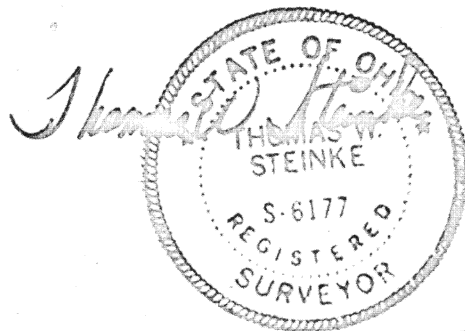

County Line
SW. COR.
N.W. QTR
N.W. QTR
563.44
S 88° 49' E
STONE

270.90'
N 88° 49' W

293.33' TO E
S 21° 26' W



Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date: _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

THOMAS W. STEINKE
Land Surveying
100 Park Street
Wapakoneta, Ohio 45890

Client E.E. SAINTIGON
County AUGLAIZE Twp. NOBLE Sec. 30 N/W 1/4
Drawn by G.E.M. Scale 1" = 60' Drwg. No. 77-495
Checked by W.S. Date AUG 1977
Sheet 1 of 2 (T-5-S-R-4-E)

THOMAS W. STEINKE

LAND SURVEYING



PHONE 419 738-7421

106 PARK ST.
WAPAKONETA, OHIO 45395

Description of 2.50 Acres

Being 2.50 Acres located in the north-west quarter of Section 30, Town 5-S, Range 4-E, Noble Township, Auglaize County, Ohio and being further described as follows:

Commencing at the south-west corner of the north-west quarter of the north-west quarter of Section 30, said point being marked by a stone as called for in Deed Book 217, Page 91 of the Auglaize County Deed Records.

Thence South $88^{\circ} 49'$ East with the quarter Section line, a distance of 563.44 feet to an iron pipe and PLACE OF BEGINNING for the tract of land hereih described.

Thence North $15^{\circ} 19'$ East, a distance of 487.98 feet to a point in the center of State Route # 33, passing through an iron pipe in the south R/W line at 455.16 feet.

Thence South $50^{\circ} 48'$ East with said center line, a distance of 321.50 feet to a railroad spike.

Thence south $21^{\circ} 26'$ West, a distance of 293.33 feet to an iron pipe passing through an iron pipe at 31.55 feet.

Thence North $88^{\circ} 49'$ West, a distance of 270.90 feet to an iron pipe and PLACE OF BEGINNING.

Containing in all 2.50 Acres and being subject to all legal easements and R/W of record.

Survey and description prepared by Thomas W. Steinke, registered Surveyor # 6177 and recorded in Survey Book "C" Page 209 of the Auglaize County Survey Records.