


### LOCATION

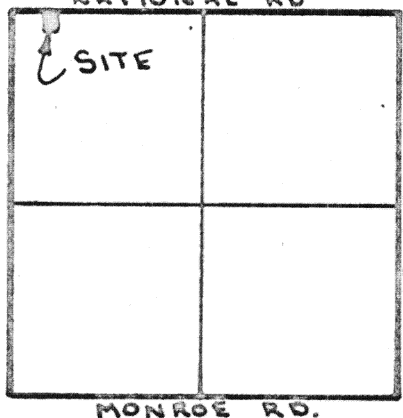

LOGAN TWP.  
SECTION 34 W 1/2  
T-4-S-R-5-E  
AUGLAIZE CO., OHIO

### ANGLES

A, B, C, & D  
ALL 90° 00'

### LEGEND

- R.R. SPIKE SET
- IRON PIN SET
- MONUMENT BOX



SURVEY CONDUCTED BY: Thomas W. Steinke  
THOMAS W. STEINKE & ASSOCIATES INC.  
WAPAKONETA, OHIO

Signature by a representative of City with 3 mile limit jurisdiction or Twp. Trustees or Village with zoning jurisdiction denotes approval of this plat. Signed: \_\_\_\_\_ Date: \_\_\_\_\_  
for political S. D. of: \_\_\_\_\_

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements. Signed: \_\_\_\_\_ Date: \_\_\_\_\_

THOMAS W. STEINKE  
Land Surveying  
106 Park Street  
Wapakoneta, Ohio 45895

Client RANDALL J. ARTHUR  
County AUGLAIZE Twp. LOGAN Sec. 34  
Drawn by G.E.M. Scale 1" = 60' Drwg. No. 78-616  
Checked by \_\_\_\_\_ Date MAY-4-1978  
Sheet 1 of 2 (T-4-S-R-5-E)

**THOMAS W. STEINKE & ASSOC., INC.**  
**LAND SURVEYING                      LAND DEVELOPMENT**  
**106 PARK STREET      WAPAKONETA, OHIO 45895**  
**PHONE: 419-738-7421**

Being 1.148 Acres located in the north-west quarter of Section 34, Town 4-S, Range 5-E, Logan Township, Auglaize County Ohio and being further described as follows:

Commencing at the north-west corner of Section 34, said point being marked by a monument box.

Thence east with the north line of Section 34 and the center of National Road C.R.# 210, a distance of 350.00 feet to a railroad spike and PLACE OF BEGINNING for the tract of land herein described.

Thence continuing east with said center line and section line, a distance of 200.00 feet to a railroad spike.

Thence south with an interior angle of  $90^{\circ} 00' 00''$ , a distance of 250.00 feet to an iron pin, passing through an iron pin at 25.0 feet.

Thence west with an interior angle of  $90^{\circ} 00' 00''$ , a distance of 200.00 feet to an iron pin.

Thence north with an interior angle of  $90^{\circ} 00' 00''$ , a distance of 250.00 feet to the north line of Section 34 and the center line of National Road and the PLACE OF BEGINNING, passing through an iron pin at 225.00 feet.

Survey and description prepared by Thomas W. Steinke and Assoc., Inc. this 4th day of May, 1978 and recorded in Survey Book D Page 7 of the Auglaize County Survey Records.