

SURVEY BOOK C
PAGE 31

1/2 SECTION LINE

Scale:



60' R/W
E KOSSUTH-AMANDA RD.
TR# 222-A

65° 52'

1457.20

PART of D.B. 207
PG. 557

113° 56' 30"

22.425 ACRES

90° 05' 20"

90° 06' 10"

1328.30

885.53

438.00


1031.50

SECTION LINE


SECTION LINE -
CR# 81

1/2 SECTION LINE

BOOK "D"
PAGE 207



SECTION 20
T-4-S R-5-E
LOGAN TWP.
AUGLAIZE CO.

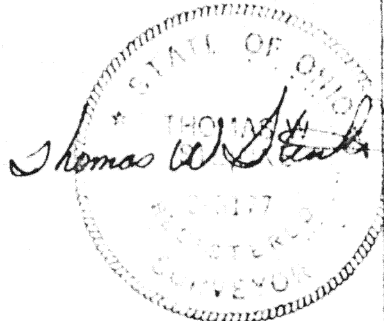

- IRON PIPE SET
- ✕ IRON PIPE FD
- R.R. SPIKE SET
- ✕ R.R. SPIKE FD

E BURNFIELD ROAD TR# 220

SURVEY BOOK C
PAGE 137

-327.27
2325.00

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Signature by a (representative of the) County Commissioner(s)
denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

207
Thomas W. Steinke & Assoc., Inc.
Land Surveying
123 West Auglaize St.
Wapakoneta, Ohio 45895

Client DALE OBRINGER
County AUGLAIZE Twp. LOGAN Sec. 20
Drawn by WJS Scale 1" = 30' Drwg. No. 78-723
Checked by WJS Date DEC 18, 1978
Sheet 207 of 207 (T 4 S; R 5 E)



Thomas W. Steinke & Assoc., Inc.
Land Surveying
123 West Auglaize St.
Wapakoneta, Ohio 45825

22.425 Acres out of the northern part of Deed Book 207, Page 557

Being 22.425 Acres located in the south-east quarter of Section 20, T-4-S, R-5-E, Logan Township, Auglaize County, Ohio and being further described as follows:

Commencing at an iron pipe found at the north-west corner of the south-east quarter of Section 20.

Thence south with the north-south half section line of Section 20, a distance of 885.53 feet to a railroad spike set in the center line of Kossuth-Amanda Road T.R.# 222-A, and the PLACE OF BEGINNING for the parcel herein described.

Thence continuing south with said half section line, a distance of 438.00 feet to an iron pipe.

Thence east with an interior angle to the right of $90^{\circ} 05' 20''$, 1328.30 feet to an iron pipe.

Thence north with an interior angle of $90^{\circ} 06' 10''$, a distance of 1031.50 feet to a railroad spike set in the center line of T.R.# 222-A.

Thence south-west with an interior angle of $65^{\circ} 52'$, a distance of 1457.20 feet along the center line of T.R.# 222-A to a railroad spike and the PLACE OF BEGINNING.

Containing in all 22.425 Acres and being subject to 1.0 Acre in road R/W.

Survey and description prepared by Thomas W. Steinke and Assoc., Inc. this 18th day of December, 1978 and recorded in Survey Book "D" page 207 of the Auglaize County Survey Records.