
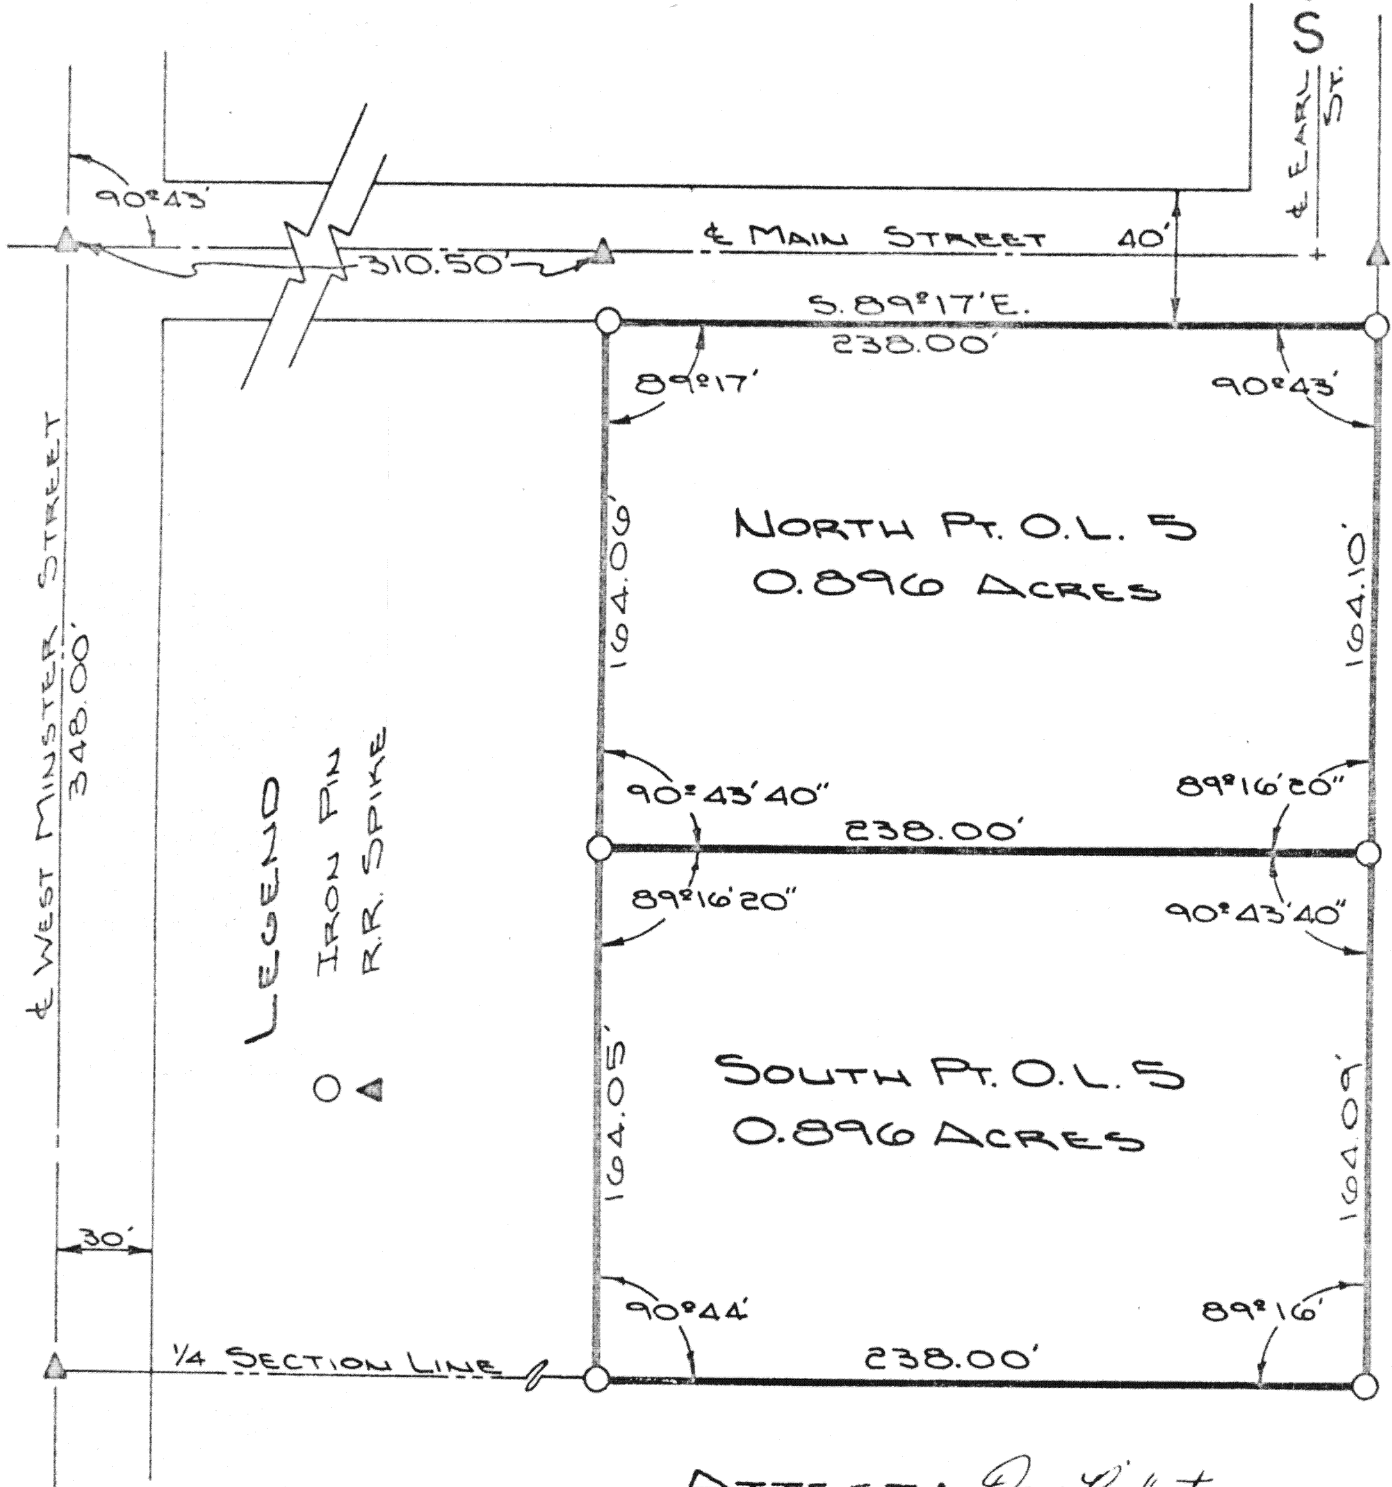


SURVEY OF OUTLOT NO 5 VILLAGE OF WAYNESFIELD

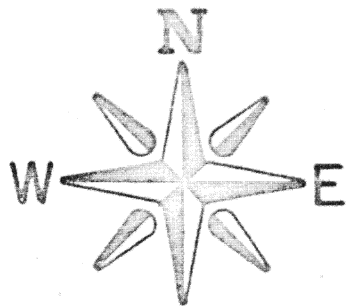

ATTEST: Doug Reinhart
DOUG REINHART
REG. SURVEYOR #6307

DEED REFERENCE:
VOLUME 226, PAGE 84

THIS PLAT IS RECORDED IN SURVEY BOOK D, PG. 305 AUGLAIZE CO. ENG. OFF.

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date: _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

DOUG REINHART
LAND SURVEYING

Client KEN STOCKER
County AUGLAIZE Twp. WAYNE Sec. 20
Drawn by JOHN JAUERT Scale 1"=60' Drwg. No. 79-150
Checked by DOUG REINHART Date APRIL 12, 1979
Sheet 1 of 3
(T S; R B E)



NORTH PART OF O.L. 5
VILLAGE OF WAYNESFIELD, OHIO

Scale: _____

The following described tract of ground is part of Outlot # 5,
Village of Waynesfield, Ohio and is more particularly described as follows:

Commencing at a spike at the intersection of Westminster Street and
Main Street;

Thence East with the centerline of Main Street a distance of 310.05 feet
to a spike;

Thence with a deflection angle to the right of $89^{\circ}-17'$ a distance of 20.00
feet to an iron pin in the Northwest corner of Outlot # 5 and the PLACE OF
BEGINNING;

Thence with the West line of Outlot #x5 a distance of 164.06 feet to an
iron pin;

Thence with a deflection angle to the left of $89^{\circ}16'-20''$ a distance of
238.00 feet to an iron pin in the East line of O.L.# 5;

Thence with a deflection angle to the left of $90^{\circ}-43'-40''$ along the East line
of said outlot a distance of 164.10 feet to an iron pin at the Northeast corner
of O.L.# 5;

Thence with a deflection angle to the left of $89^{\circ}-17'$ along the South right-
of-way line of Main Street a distance of 238.00 feet to an iron pin and the
PLACE OF BEGINNING.

The above described tract of ground contained 0.896 Acres and is subject to
all easements of record. Survey recorded in Survey Book D, Page 305, Auglaize
County Engineers Office. Previous Deed Reference: Volume 226, Page 84.

Doug Reinhart

Doug Reinhart
Professional Surveyor # 6507

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

306

Client Wes Motter
County Auglaize Twp. Wayne Sec. _____
Drawn by _____ Scale _____ Drwg. No. 79-150
Checked by _____ Date 1-3-79
Sheet 2 of 3 (T. S; R. E)

306

D-306



SOUTH PART OF O.L. # 5
VILLAGE OF WAYNESFIELD, OHIO

Scale: _____

The following described tract of ground is part of Outlet # 5,
Village of Waynesfield, Ohio and is more particularly described as follows:

Commencing at a spike at the intersection of Westminster Street and
Main Street in the Village of Waynesfield;

Thence East with the centerline of Main Street a distance of 310.50
feet to a spike;

Thence with a deflection angle to the right of 89°-17' a distance of
184.06 feet to an iron pin and the PLACE OF BEGINNING;

Thence continuing on same line a distance of 164.05 feet to an iron pin
in the southwest corner of Outlet # 5;

Thence with a deflection angle to the left of 89°-16' a distance of
238.00 feet to an iron pin in the southeast corner of O.L. # 5;

Thence with a deflection angle to the left of 90°-44' a distance of
164.09 feet to an iron pin;

Thence with a deflection angle to the left of 89°-16'-20" a distance of
238.00 feet to an iron pin and the PLACE OF BEGINNING.

The above described tract of ground contains 0.896 Acres and is subject
to all easements of record. Survey recorded in Survey Book D, Page 305,
Auglaize County Engineers Office. Previous Deed Reference: Volume 226,
Page 84.

Doug Reinhart

Doug Reinhart

Professional Surveyor # 6507

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.

Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.

Signed: _____ Date _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.

Signed: _____ Date _____

307

Client Ken Stocker

County Auglaize Twp. Wayne Sec. _____

Drawn by _____ Scale _____ Drwg. No. 79-150

Checked by _____ Date 4-3-79

Sheet 3 of 3 (T S R E)

307

0307