

LEGEND

"A" CORNER STONE FOR SUB-DIV. 34, 35 & 36, 37 FOR
ON PLAT OF SUB-DIV. OF BLOCK 50N SCOTT'S ADD

PS = HUB FD. FROM PREVIOUS SURVEY.


'C' = P.K. NAIL.

"D" = 5/8" IRON BAR SET.

"E" = P.K. NAIL DRILLED IN SANDSTONE WALK.

NOTE

This stone as occupancy indicates, has been used for layout purposes throughout this entire block. There is strong doubt as to the validity of this stone as evidenced by other stones in the area and existing well established street centerlines. This surveyor while realizing this doubt, feels compelled to "follow suit" and use it to locate the North line of this block.

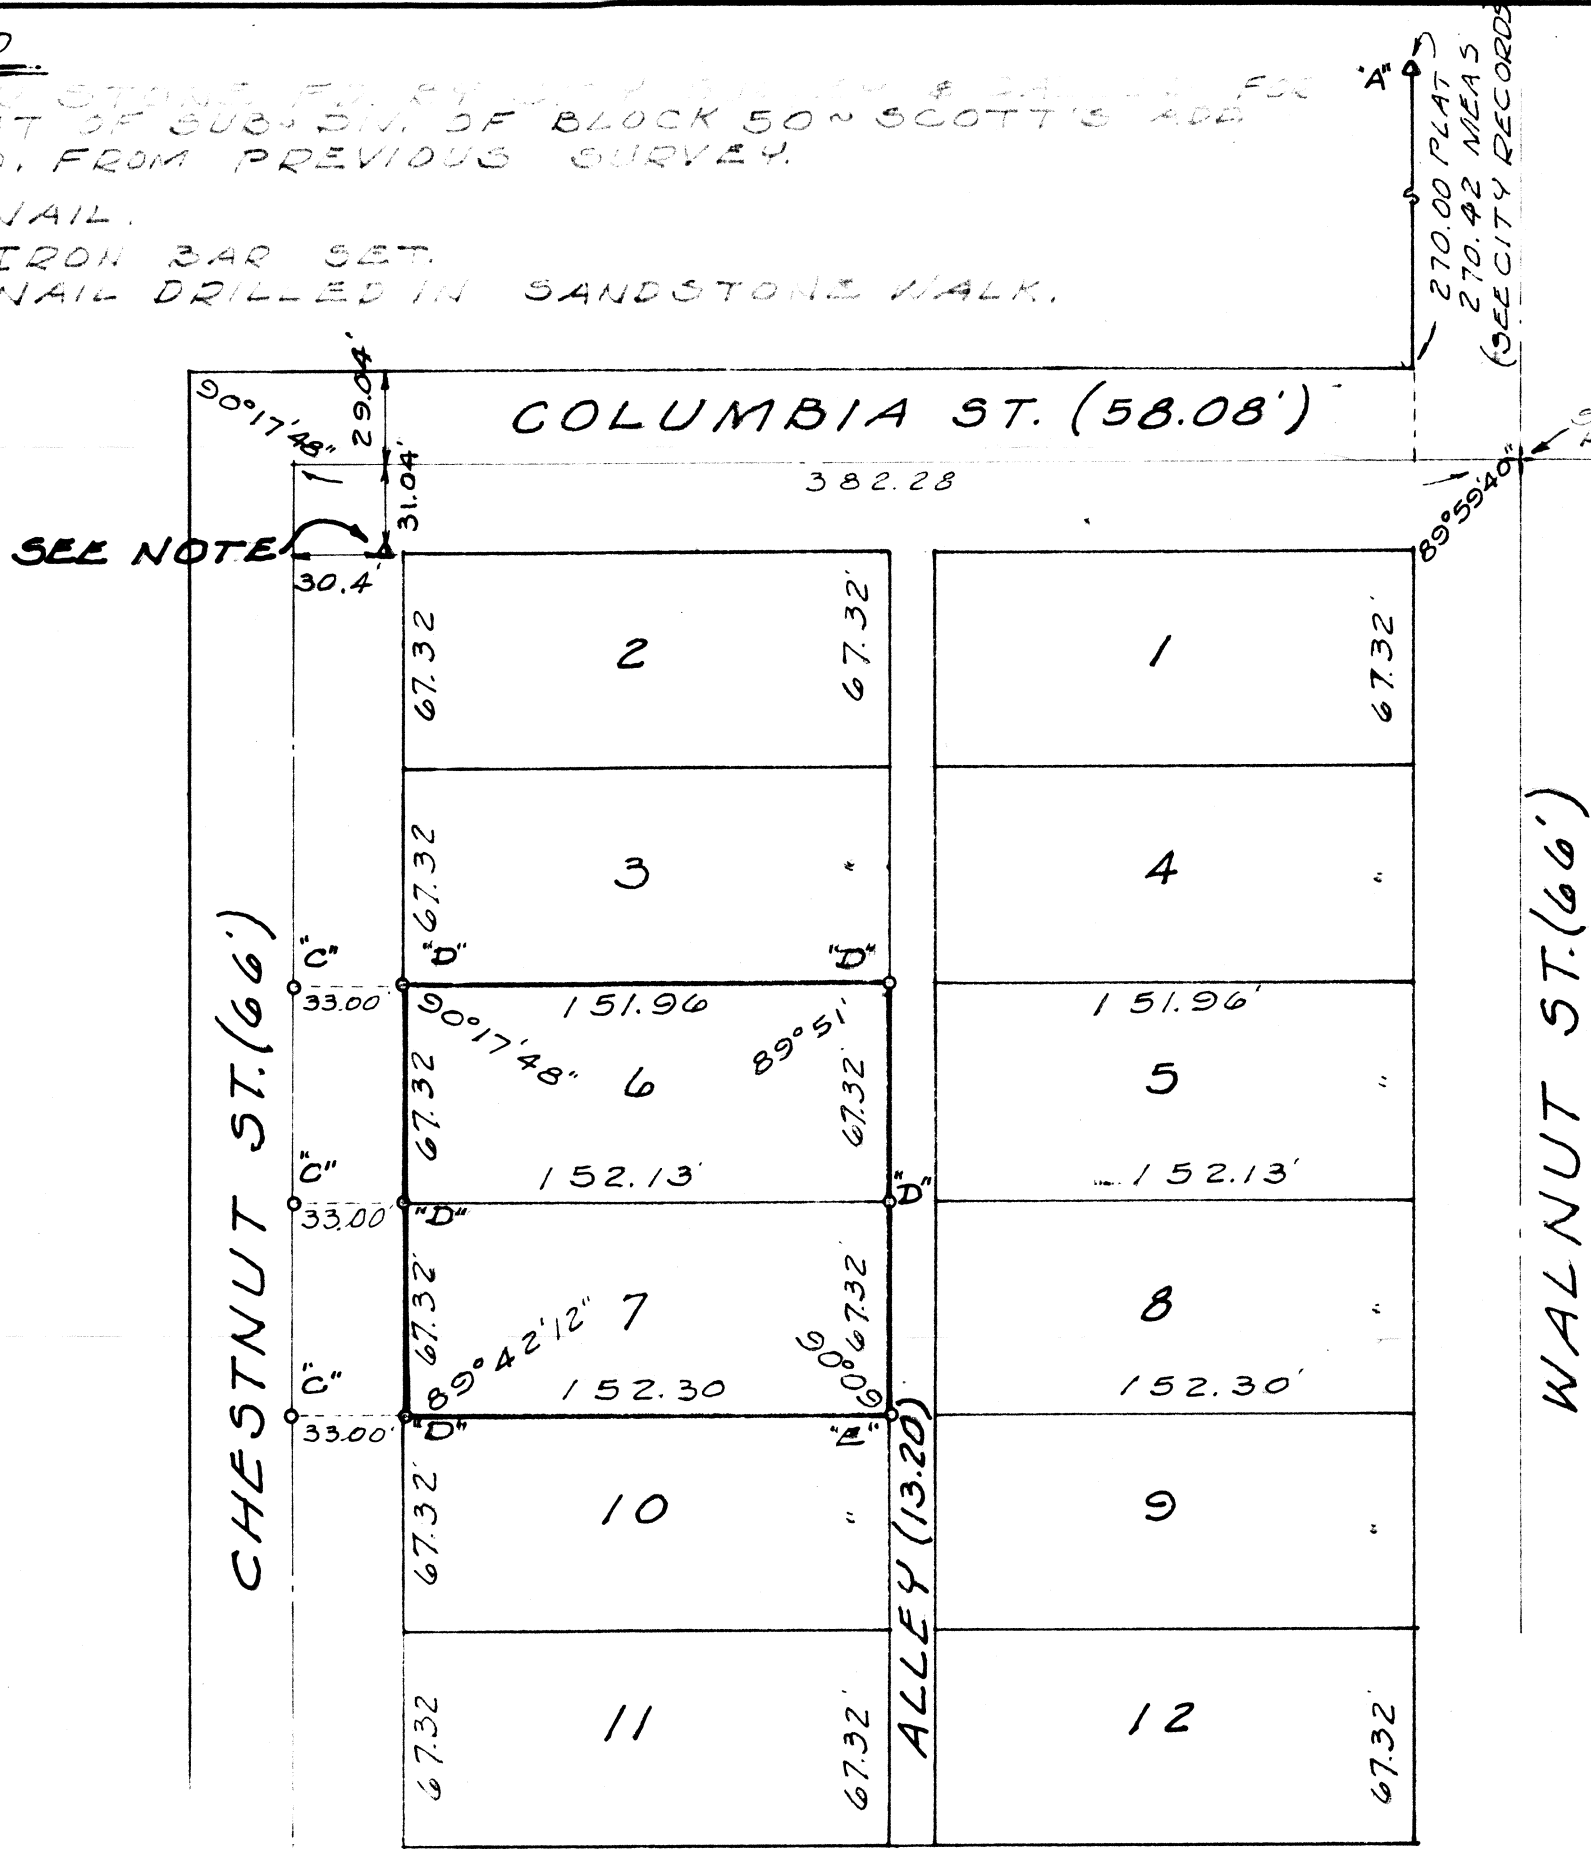

SEE CITY
RECORDS


WALNUT ST. (66')

SURVEYED BY Gordon L. Geeslin
GORDON L. GEESLIN
REGISTERED SURVEYOR
N^o 5372

SURVEY OF LOTS 6 & 7 OF BLOCK
46 OF SCOTT'S ADDITION TO THE
CITY OF ST. MARYS, AUGLAIZE
COUNTY, OHIO.

MAY , 1978

SCALE 1" = 60'

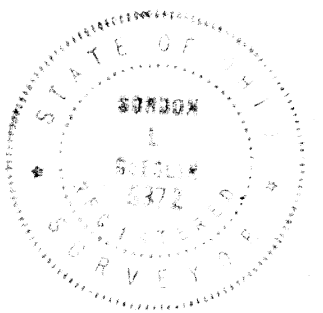

COMM. NO.	DRAWN BY		DATE	REVISION DATE	SHEET NO.
	CHECKED BY				