


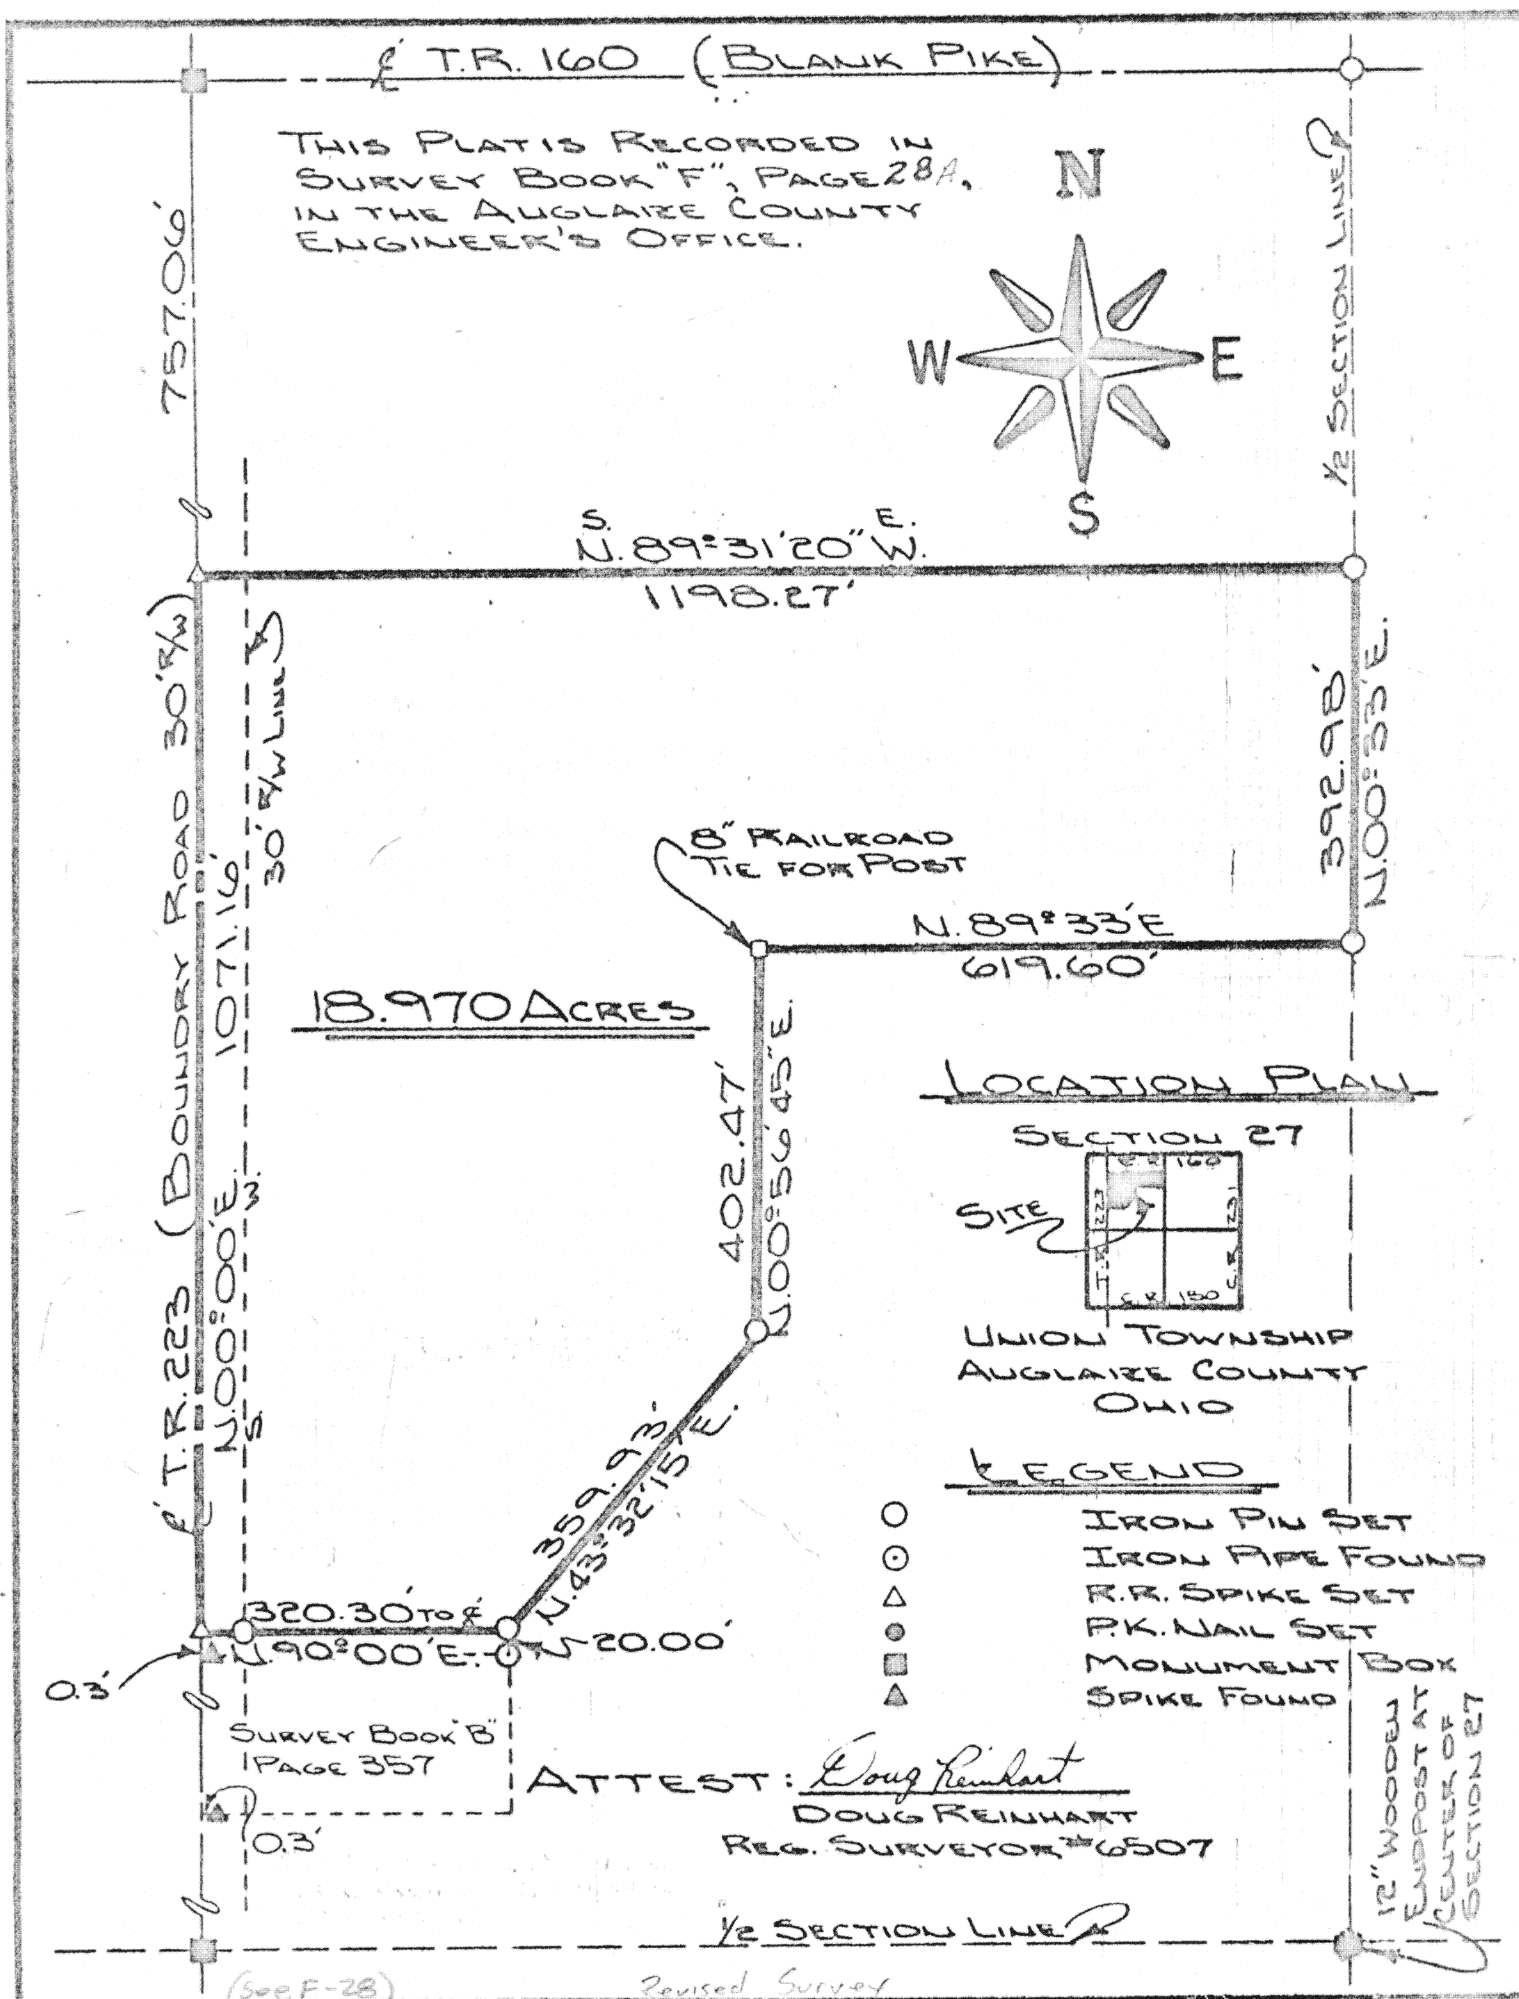

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____ Date _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

DOUG REINHART
LAND SURVEYING

Client CULP/SEARFOSS
County AUGLAIZE Twp. UNION Sec. 27
Drawn by J. SAUERT Scale 1"=200' Drwg. No. 81-219
Checked by D.P.R. Date FEB. 23RD, 1981
Sheet 1 of 2 (T. 5 S.; R. 7 E)

28A F 28A

F 28A



Scale: _____

SURVEYORS DESCRIPTION

The following described tract of ground is part of the Northwest Fractional Quarter of Section 27, Union Township, Township Five South, Range Seven East, Auglaize County, Ohio and is more particularly described as follows:

Commencing at a monument box at the Northwest corner of the fractional East half of the Northwest Quarter of Section 27, Union Township, said box being at the intersection of the centerlines of Township Road # 160 (Blank Pike) and Township Road # 223 (Boundry Road); Thence S00°-00'W along the West line of the East fractional half of the Northwest Quarter of Section 27 and the centerline of T.R. # 223 a distance of 757.06 feet to a spike and the PLACE OF BEGINNING;

Thence continuing S00°-00'W along said centerline a distance of 1071.16 feet to a spike;

Thence N90°-00'E a distance of 320.30 feet to an iron pin;

Thence N43°-32'-15"E a distance of 359.93 feet to an iron pin;

Thence N00°-56'-45"E a distance of 402.47 feet to an 8" railroad tie;

Thence N89°-33'E a distance of 619.60 feet to an iron pin in the North-South half section line of Section 27;

Thence N00°-33'E along said half section line a distance of 392.98 feet to an iron pin;

Thence N89°-31'-20"W a distance of 1198.27 feet to a spike in the centerline of Township Road # 223 and the PLACE OF BEGINNING.

The above described tract of ground contains 18.970 Acres of which 0.74 Acres has been previously dedicated for highway right-of-way purposes. The above described parcel is subject to all easements of record. Previous deed reference: Volume 235, Page 474, Auglaize County Recorders Office. Survey filed in Plat Book F, Page 28, Auglaize County Engineers Office.

ATTEST:

Doug Reinhart
Doug Reinhart

Professional Surveyor # 6507

Revised

Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional
Planning Commission denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of City with 3 mile limit juris-
diction or Twp. Trustees or Village with zoning jurisdiction
denotes approval of this plat. Signed: _____
for political S. D. of: _____ Date _____

Signature by a representative of the County Engineer's Dept.
denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

Reinhart Land Surveying
Doug Reinhart, P.S.
R.R. # 6, Wapakoneta, Ohio

Client Culp/Searfoss
County Auglaize Twp. Union Sec. 27
Drawn by _____ Scale _____ Drwg. No. 81-210
Checked by _____ Date 2-23-81
Sheet 2 of 2 (T 5 S 7 E)

29A

E-29A

F29A