
BOYER SURVEY

SECTION 30 N.W. QTR. T.6.5 R-6.E PUSHETA TOWNSHIP AUGLAIZE COUNTY 0410

REF. SURVEY BOOK "A" PAGE "60" 9.91 AC IN ERROR BY 1.00 AC. SHOULD BE 8.91 AC.

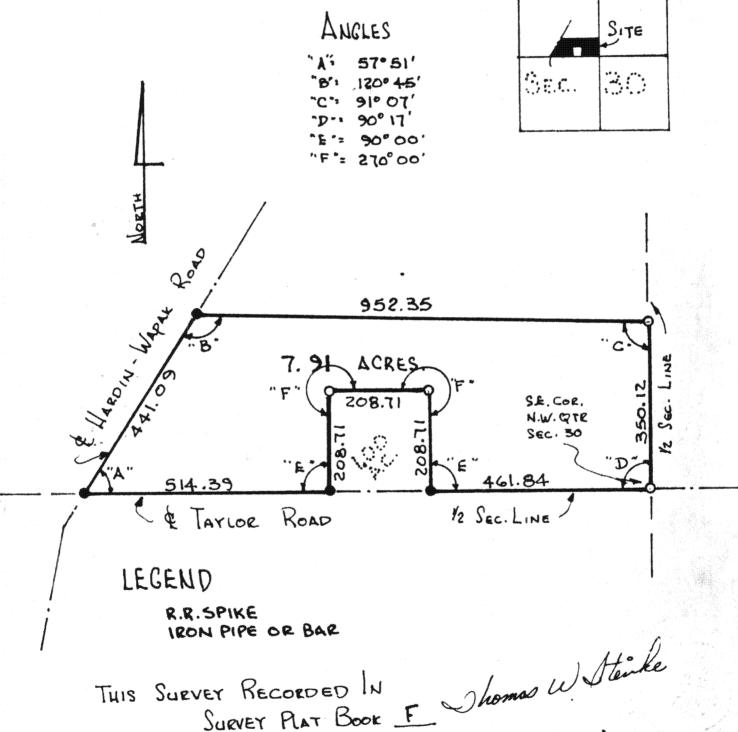

THIS SURVEY RECORDED IN SURVEY PLAT BOOK F

PAGE 151

DATE: Nov, 1981

SCALE: 1" 200'

FILE Nº 81- 1165

PREPARED BY

THOMAS W. STEINKE & ASSOC. LAND SURVEYORS . LAND CONSULTANTS 16454 C.R # 25.A BOTKINS - OHIO 45306 1.51 PHONE (513) 693-4891

151

Description of 7.91 Acres
Kim Boyer
File Number 81-1165

Being 7.91 Acres located in the north-west quarter of Section 30, Town-6-S, Range-6-E, Pusheta Township, Auglaize County, Ohio and being further described as follows.

Commencing at an iron bar located at the south-east corner of the north-west quarter of Section 30 and the PLACE OF BEGINNING for the parcle herein described.

Thence west along the east-west half section line of Section 30 and the center line of Taylor Road, a distance of 461.84 feet to a railroad spike.

Thence north with an interior angle to this parcel of 90° 00°, a distance of 208.71 feet to an iron pipe.

Thence west with an interior angle to this parcel of 270° 00, a distance of 208.71 feet to an iron pipe.

Thence south with an interior angle to this parcel of 270° 00°, a distance of 208.71 feet to a railroad spike in the center line of Taylor Road and the south east west half section line of Section 30.

Thence west with said section line and center line with an interior angle to this parcel of 90° 00°, a distance of 514.39 feet to a railroad spike in the center line of Wapak-Hardin Road.

Phence north-east with the center line of Hardin-Wapak Road, with an interior angle to this parcel of 57° 51°, a distance of 441.09 feet to a railroad spike.

Thence east with an interior angle to this parcel of 120° 45°, a diatance of 952.35 feet to an iron bar in the north-south half section line.

Thence south with said section line with an interior angle to this parcel of 91° 07°, a distance of 350.12 feet to the PLACE OF BEGINNING, making an interior angle with the beginning course of 90° 17°.

Containing in all 7.91 Acres and being subject to the rightof-way for Taylor and Hardin-Wapak Roads.

Survey and description prepared by Thomas W. Steinke,
Registered Surveyor # 6177 on this 28th day of November, 1981
and recorded in Survey Book F Page 151 of the Auglaize
County Survey Records.