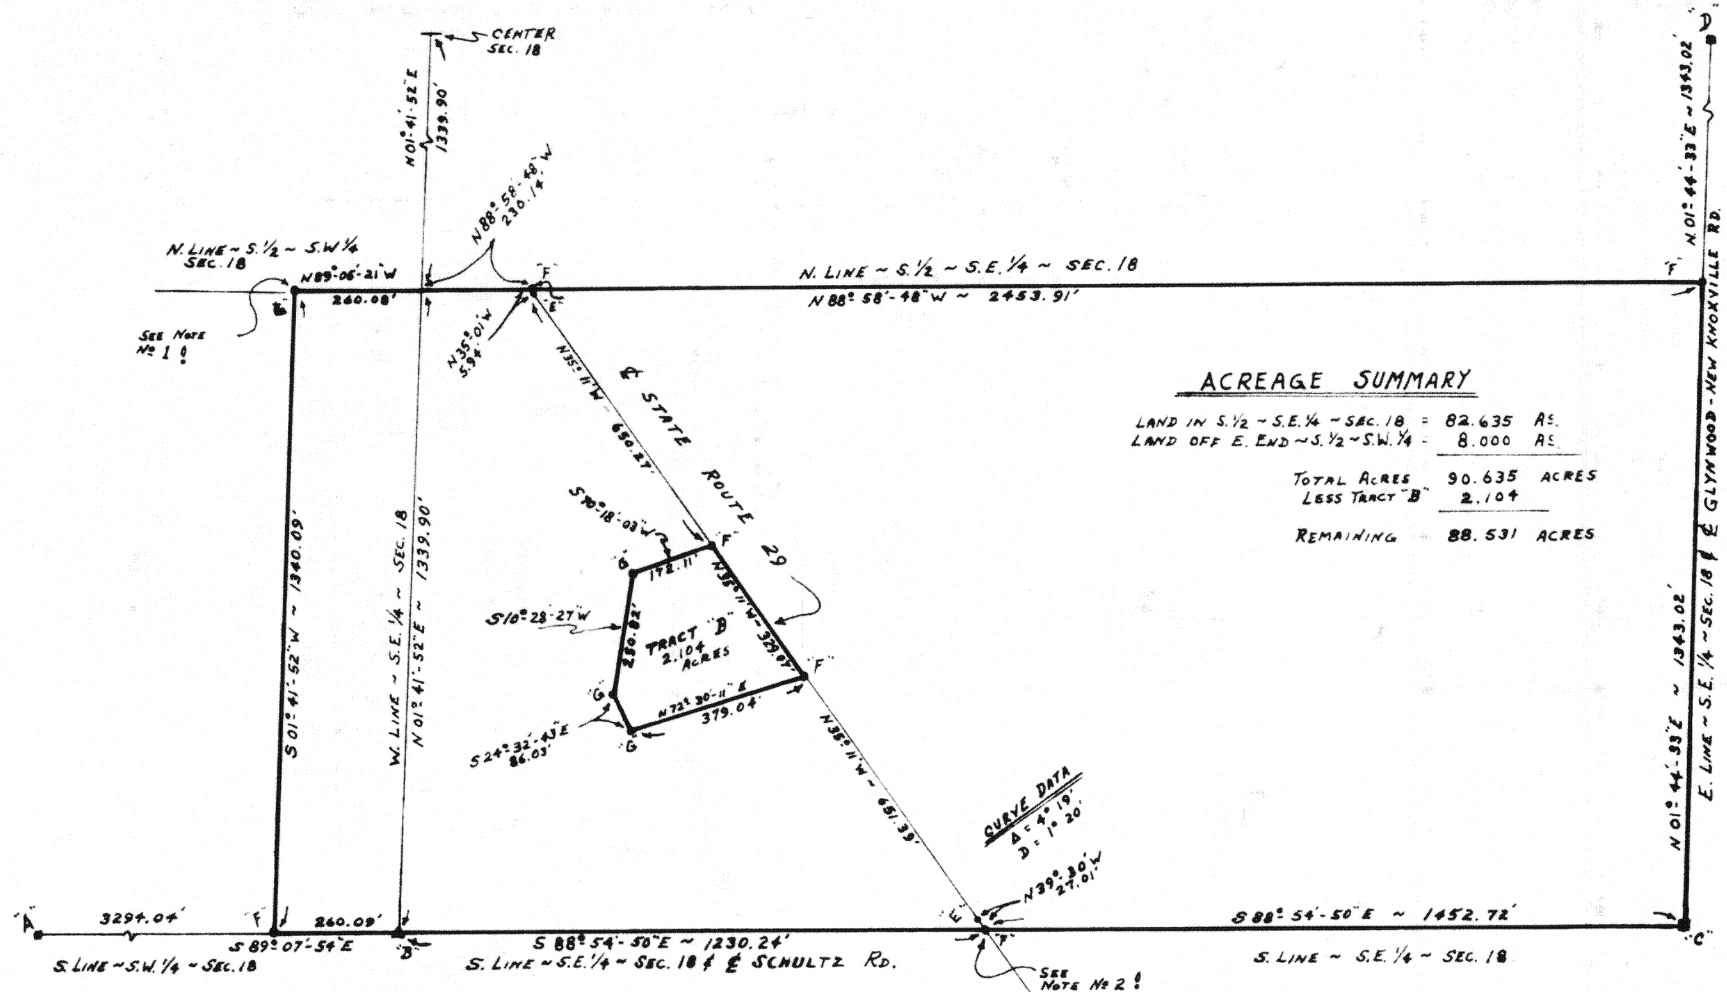
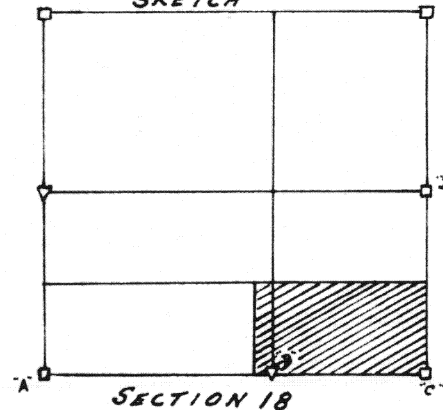


1-05-10

**NOTES**

- (1) THIS POINT IS 4.59' N. OF & 2.40' E. OF THE CORNER AS OCCUPIED BY FENCE CORNER POST. ADVERSE POSSESSION IS POSSIBLE & LEGAL ADVISE IS RECOMMENDED.
- (2) DUE TO FINDING THE STONE @ "B", THIS POINT IS S. 39° 30' E., 1.51' FROM THAT OF A FORMER SURVEY BY THIS SURVEYOR DATED 30 APRIL 1979. STATE SURVEY INFORMATION WAS USED IN 1979 TO DETERMINE THIS LINE AT THIS POINT AND FOUND TO BE IN ERROR BY FINDING THE CORNER STONE.

LOCATION SKETCH**LEGEND**

- A : IRON BAR @ S.W. COR. ~ SEC. 18
- B : STONE @ S. 1/4 POST ~ SEC. 18
- C : IRON BAR @ S.E. COR. ~ SEC. 18
- D : IRON BAR @ E. 1/4 POST ~ SEC. 18
- E : RAILROAD SPIKE Fd. FROM STATE SURVEY
- F : RAILROAD SPIKE SET.
- G : 1/4" IRON BAR SET.
- H : STONE Fd. BY THIS SURVEY (SEE LOCATION SKETCH)
- I : STONES ALSO USED TO LOCATE THIS SURVEY.

Scale:
1" = 400'



Signature by a representative of the County Health Dept.
denotes compliance with Health Regulations.
Signed: _____ Date: _____

Signature by a representative of City with 3 mile limit jurisdiction or Twp. Trustees or Village with zoning jurisdiction denotes approval of this plat. Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date: _____

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date: _____

Surveyed by

GORDON L. GEESLIN #5372
CELINA, OHIO

Client FISHBEIN

County AUGLAIZE Twp WASHINGTON Sec. 18

Drawn by HOBBS (6-13-83) Scale 1" = 400' DWG. No. _____

Checked by _____ Date FEB. 1983

Sheet 1 of 1 (T 6 S; R 5 E)