


LOCATION
SKETCH



SECTION 32

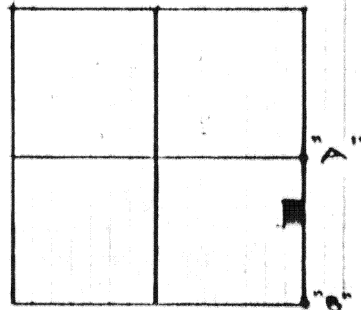

LEGEND

- "A" = 1" STONE @ E. 1/4 POST & SEC. 32.
 "B" = 1" STONE @ S.E. COR. & SEC. 32.
 "C" = RAILROAD SPIKE SET.
 "D" = 5/8" X 30" IRON BAR SET.

SURVEYED BY

Gordon L. Geeslin

GORDON L. GEESLIN
 REGISTERED SURVEYOR
 NO. 5372
 ~ CELINA, OHIO ~



Signature by a representative of the County Health Dept.
 denotes compliance with Health Regulations.

Signed: _____ Date: _____

Signature by a representative of the Auglaize County Regional
 Planning Commission denotes approval of this plat.

Signed: _____ Date: _____

Signature by a representative of City with 3 mile limit juris-
 diction or Twp. Trustees or Village with zoning jurisdiction
 denotes approval of this plat. Signed: _____
 for political S. D. of: _____ Date: _____

Signature by a representative of the County Engineer's Dept.
 denotes that this plat meets tax map plat requirements.

Signed: _____ Date: _____

GORDON GEESLIN
 LAND SURVEYOR
 CELINA, OHIO.

Client MIKE & DECKY DARDER
 County AUGLAIZE Twp. SALEM Sec. 32
 Drawn by G.L.G. Scale 1"=100' Drwg. No. _____
 Checked by _____ Date 6 JULY '84
 Sheet 1 of 1 G-335 (T 4 S; R 4 E)

GORDON L. GEESLIN

REGISTERED LAND SURVEYOR

PHONE 419-586-6155

July 6, 1984

BARBER SURVEY DESCRIPTION

Being a parcel of land situated in Salem Township, Auglaize County, Ohio, in the southeast quarter of Section 32, Township 4 South, Range 4 East. Being more particularly described as follows:

Commencing for reference at the cornerstone at the northeast corner of said southeast quarter of Section 32-

Thence, south, along the east line of said southeast quarter of Section 32 and the centerline of State Route 116, a distance of seven hundred twenty-four and 90/100 (724.90) feet to a railroad spike, said point being the place of beginning for the parcel to be conveyed by this instrument-

Thence, continuing, south, along the last described line, a distance of two hundred ninety-five and 16/100 (295.16) feet to a railroad spike-

Thence, north 87°00' west, a distance of two hundred ninety-five and 57/100 (295.57) feet to a 5/8 inch iron bar-

Thence, north, a distance of two hundred ninety-five and 16/100 (295.16) feet to a 5/8 inch iron bar-

Thence, south 87°00' east, a distance of two hundred ninety-five and 57/100 (295.57) feet to the place of beginning.

Containing 2.000 acres of land more or less.

Subject to all easements and right-of-way of record.

Reference is made to a survey of this area by Gordon L. Geeslin, Registered Surveyor 5372, dated July 6, 1984, on file in the County Engineer's Office.

Surveyed by

Gordon L. Geeslin

Gordon L. Geeslin

Registered Surveyor 5372



540 EAST MARKET STREET

CELINA, OHIO 45822

6-336