


northeast corner of said Northeast quarter of said Section 1; thence S 89°57'00" W with the north line of said Northeast quarter (also the centerline of Geiger Road), 1331.47 feet to a railroad spike found, at the northeast corner of the half of said Northeast quarter; thence S 00°11'50" W with the east line of half of said Northeast west 1137.68 feet to a 5/8 inch rebar the PLACE OF BEGINNING thence continuing S 00°11'50" W with said east line, to a point on the centerline of southwesterly with 33A; thence said CR- 33A on a curve to centerline of not tangent to the previous having a radius of 28,647.90 an arc length of 172.25 feet to a PK mail shinner set (chord for said curve is S 80°55'30" W, feet); 172.25 N ๒๒°11'5๒" E (passing through a 5/8 inch nebar set at 41.84 feet), 397.96 feet to a 5/8 inch rebar set; thence N 89°57'00" E, 170.00 feet to the PLACE OF BEGINNING containing 1.500 acres more or less and subject to all highways and other legal

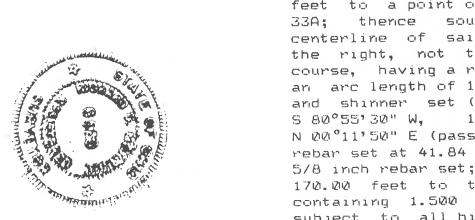

R. 28647.9

Arc: 172.25

& Barrington

Ohio LS 6470

Pd.

easements of record.	
Signature by a representative of the County Health Dept. denotes compliance with Health Regulations. Signed: Date	Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat. Signed: Date
Signature by a representative of City with 3 mile limit jurisdiction or Twp. Trustees or Village with zoning jurisdiction denotes approval of this plat. Signed: Date Date	Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements. Signed: Date
Client County Drawn by Checked b	Orly Homan Orly 10 me Twp. 51. Mary: Sec. 1 ORDM Scale 1"= 100" Drwg. No. y 50 Date 7/31/85

Checked by _

Sheet

6545

(T-6-S; R-4-E)