


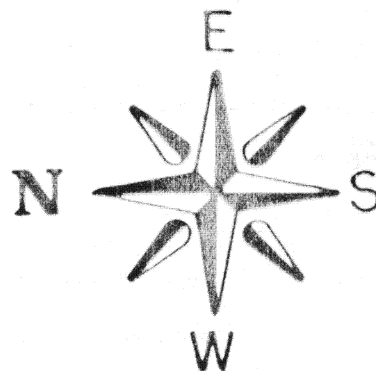


CR. 261

WAYNEFIELD RD.

MONUMENT BOX  
INSTALLED 8-16-79,  
STONE FOUND.


2942.00'  
2940.00'  
2940.00'  
2940.00'  
2940.00'  
2940.00'  
2940.00'  
2940.00'  
2940.00'  
2940.00'

LOCATION PLAN  
SECTION 19



WAYNE TOWNSHIP  
T-5-S, R-8-E, AUGLAIZE  
COUNTY, OHIO

THE SOUTH QUARTER CORNER  
OF SECTION 19, T-5-S, R-8-E, WAYNE  
TOWNSHIP WAS RE-SET BY USING  
SINGLE PROPORTIONAL MEASUREMENT  
BETWEEN THE SOUTHEAST ORIGINAL  
CORNER AND THE SOUTHWEST ORIG-  
INAL CORNER OF SAID SECTION,  
AS SURVEYED IN 1875 BY  
SAMUEL CRAIG. SEE SURVEY BOOK  
1, PAGE 178 IN THE AUGLAIZE  
COUNTY ENGINEER'S OFFICE.



ATTEST: John W. Jauert  
JOHN W. JAUBERT  
REG. SURVEYOR  
Nº 6920

MONUMENT BOX  
INSTALLED 7-15-75,  
STONE FOUND.

T.R. 251

SANTA-FE LINE RD.

THIS PLAT IS RECORDED IN SURVEY BOOK 6, PAGE 701  
IN THE AUGLAIZE COUNTY ENGINEER'S OFFICE

Signature by a representative of the County Health Dept.  
denotes compliance with Health Regulations.  
Signed: \_\_\_\_\_ Date \_\_\_\_\_

Signature by a representative of the Auglaize County Regional  
Planning Commission denotes approval of this plat.  
Signed: \_\_\_\_\_ Date \_\_\_\_\_

Signature by a representative of City with 3 mile limit juris-  
diction or Twp. Trustees or Village with zoning jurisdiction  
denotes approval of this plat. Signed: \_\_\_\_\_  
for political S. D. of: \_\_\_\_\_ Date \_\_\_\_\_

Signature by a representative of the County Engineer's Dept.  
denotes that this plat meets tax map plat requirements.  
Signed: \_\_\_\_\_ Date \_\_\_\_\_

AUGLAIZE COUNTY  
ENGINEER'S OFFICE

6701

Client \_\_\_\_\_  
County AUGLAIZE Twp. WAYNE Sec. 19  
Drawn by J. JAUBERT Scale 1"=600' Drwg. No. \_\_\_\_\_  
Checked by \_\_\_\_\_ Date MAY 21, 1986  
Sheet 1 of 1  
(T-5-S, R-8-E)