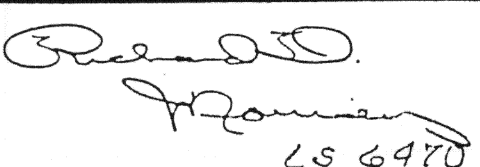


DESCRIPTION

Being a parcel of land situate in the east half of the Southeast quarter of Section 19, T-5-S, R-6-E, Duchouquet Township, Auglaize County, Ohio and more particularly described as follows:

Commencing at a railroad spike found at the southeast corner of said Southeast quarter of said Section 19; thence S 89°33'00" W with the south line of said Southeast quarter (passing through a 5/8 inch rebar found at 30.00 feet), 580.82 feet to a 5/8 inch rebar found and the PLACE OF BEGINNING thence continuing S 89°33'00" W with said south line, 531.36 feet to a railroad spike found at the intersection of said south line with the centerline of State Route 198; thence N 31°27'04" W with said centerline of said State Route 198, 437.48 feet to a PK nail set; thence N 89°33'00" E (passing through a 5/8 inch rebar set at 33.75 feet), 759.63 feet to a 5/8 inch rebar found; thence S 00°00'00" W, 375.00 feet to the PLACE OF BEGINNING containing 5.557 acres more or less and subject to all highways and other legal easements of record.

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations. Signed: _____ Date: _____	Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat. Signed: _____ Date: _____
Signature by a representative of City with 3 mile limit jurisdiction or Twp. Trustees or Village with zoning jurisdiction denotes approval of this plat. Signed: _____ Date: _____ for political S. D. of: _____	Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements. Signed: _____ Date: _____
 LS 6470	Client <u>Dr. Thomas Freytag</u> County <u>Auglaize</u> Twp. <u>Duchouquet</u> Sec. <u>19</u> Drawn by <u>RDM</u> Scale <u>1"=200'</u> Drwg. No. _____ Checked by <u>rdm</u> Date <u>2/12/88</u> Sheet <u>1</u> of <u>1</u> H-523 (T-5-S; R-6-E) Rev. 2/26/88