



SURVEYED BY

Gordon L. Geeslin  
GORDON L. GEESLIN  
REGISTERED SURVEYOR  
NO. 5372

WEST LINE ~ N.W. 1/4 ~ SEC. 19 & MERCER-AUGLAIZE COUNTY RD (35')

N. 01° 44' 40" W. ~ 643.67'  
N. 01° 44' 40" W. ~ 154.19'  
N. 01° 44' 40" W. ~ 518.77'

1/2" IRON BAR @ N.W. COR. ~  
S. 1/2 ~ N.W. 1/4 ~ SEC. 19

BETTY KINDRICKS  
O.R. 25, PG. 148

RAILROAD SPIKE  
FOUND

N. 88° 30' 20" E. ~ 300.00'

3/4" IRON PIPE  
FOUND

1.062  
ACRES

S. 01° 44' 40" E. ~ 154.19'

S. 88° 30' 20" W. ~ 300.00'

5/8" x 30" IRON  
BAR SET

MINE SPIKE SET


TRACT 6  
PREVIOUSLY SURVEYED

TRACT 7

TRACT 8

TRACT 10

LOCATION  
SKETCH

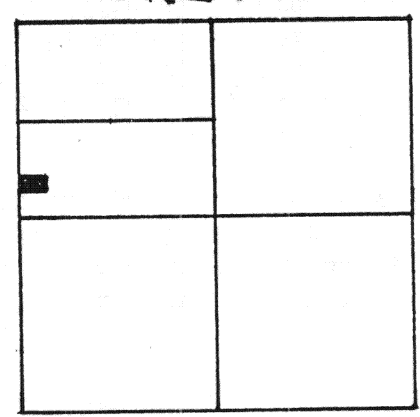

SECTION 19

STONE  
@ S.W. COR. ~  
N.W. 1/4 ~ SEC. 19

S. LINE ~ N.W. 1/4 ~ SEC. 19

Signature by a representative of the County Health Dept.  
denotes compliance with Health Regulations.  
Signed: \_\_\_\_\_ Date \_\_\_\_\_

Signature by a representative of the Auglaize County Regional  
Planning Commission denotes approval of this plat.  
Signed: \_\_\_\_\_ Date \_\_\_\_\_

Signature by a representative of City with 3 mile limit juris-  
diction or Twp. Trustees or Village with zoning jurisdiction  
denotes approval of this plat. Signed: \_\_\_\_\_  
for political S. D. of: \_\_\_\_\_ Date \_\_\_\_\_

Signature by a representative of the County Engineer's Dept.  
denotes that this plat meets tax map plat requirements.  
Signed: \_\_\_\_\_ Date \_\_\_\_\_

GORDON L. GEESLIN  
LAND SURVEYOR  
CELINA, OHIO.

Client RICHARD SWARTS  
County AUGLAIZE Twp. ST. MARYS Sec. 19  
Drawn by G.G. Scale 1"=100' Drwg. No. \_\_\_\_\_  
Checked by \_\_\_\_\_ Date 26 NOV. 1986  
Sheet 1 of 1 H-767 (T 6 S; R 4 E)

# GORDON L. GEESLIN

REGISTERED LAND SURVEYOR

PHONE 419-586-6155

November 26, 1986

## LIBBEE SURVEY DESCRIPTION (Revised Hilbert Tract)

Being a parcel of land situated in St. Marys Township, Auglaize County, Ohio, in the south half of the northwest quarter of Section 19, Township 6 South, Range 4 East. Being more particularly described as follows:

Commencing for reference at the corner stone at the southwest corner of the northwest quarter of said Section 19.

Thence, north  $01^{\circ}44'40''$  west, along the west line of the northwest quarter of said Section 19 and the centerline of Mercer-Auglaize County Line Road, a distance of five hundred eighteen and  $77/100$  (518.77) feet to a mine spike. Said point being the place of beginning for the parcel to be conveyed by this instrument-

Thence, continuing north  $01^{\circ}44'40''$  west, along the last described line, a distance of one hundred fifty-four and  $19/100$  (154.19) feet to a railroad spike at the southwest corner of a 0.689 acre tract of land conveyed to Betty Kendricks by deed recorded in Official Record 25, page 148-

Thence, north  $88^{\circ}30'20''$  east, along said Kendricks, south line, a distance of three hundred (300.00) feet to an iron pipe-

Thence, south  $01^{\circ}44'40''$  east, a distance of one hundred fifty-four and  $19/100$  (154.19) feet to a  $5/8$  inch iron bar-

Thence, south  $88^{\circ}30'20''$  west, a distance of three hundred (300.00) feet to the place of beginning-

Containing 1.062 acres of land more or less of which 0.062 acre is road right-of-way.

Reference is made to a survey of this area by Gordon L. Geeslin, Registered Surveyor 5372, dated November 26, 1986, on file in the County Engineers office.

Surveyed by

*Gordon L. Geeslin*  
Gordon L. Geeslin

Registered Surveyor 5372



101 SOUTH LEBLOND STREET

CELINA, OHIO 45822

H-768