


LOCATION PLAN


SECTION 30



NOBLE TOWNSHIP
T.5-S, R.4-E, AUGLAIZE
COUNTY, OHIO.


LEGEND

- IRON PIN SET
- IRON PIPE FOUND
- △ R.R. SPIKE SET
- ▲ R.R. SPIKE FOUND
- MONUMENT BOX

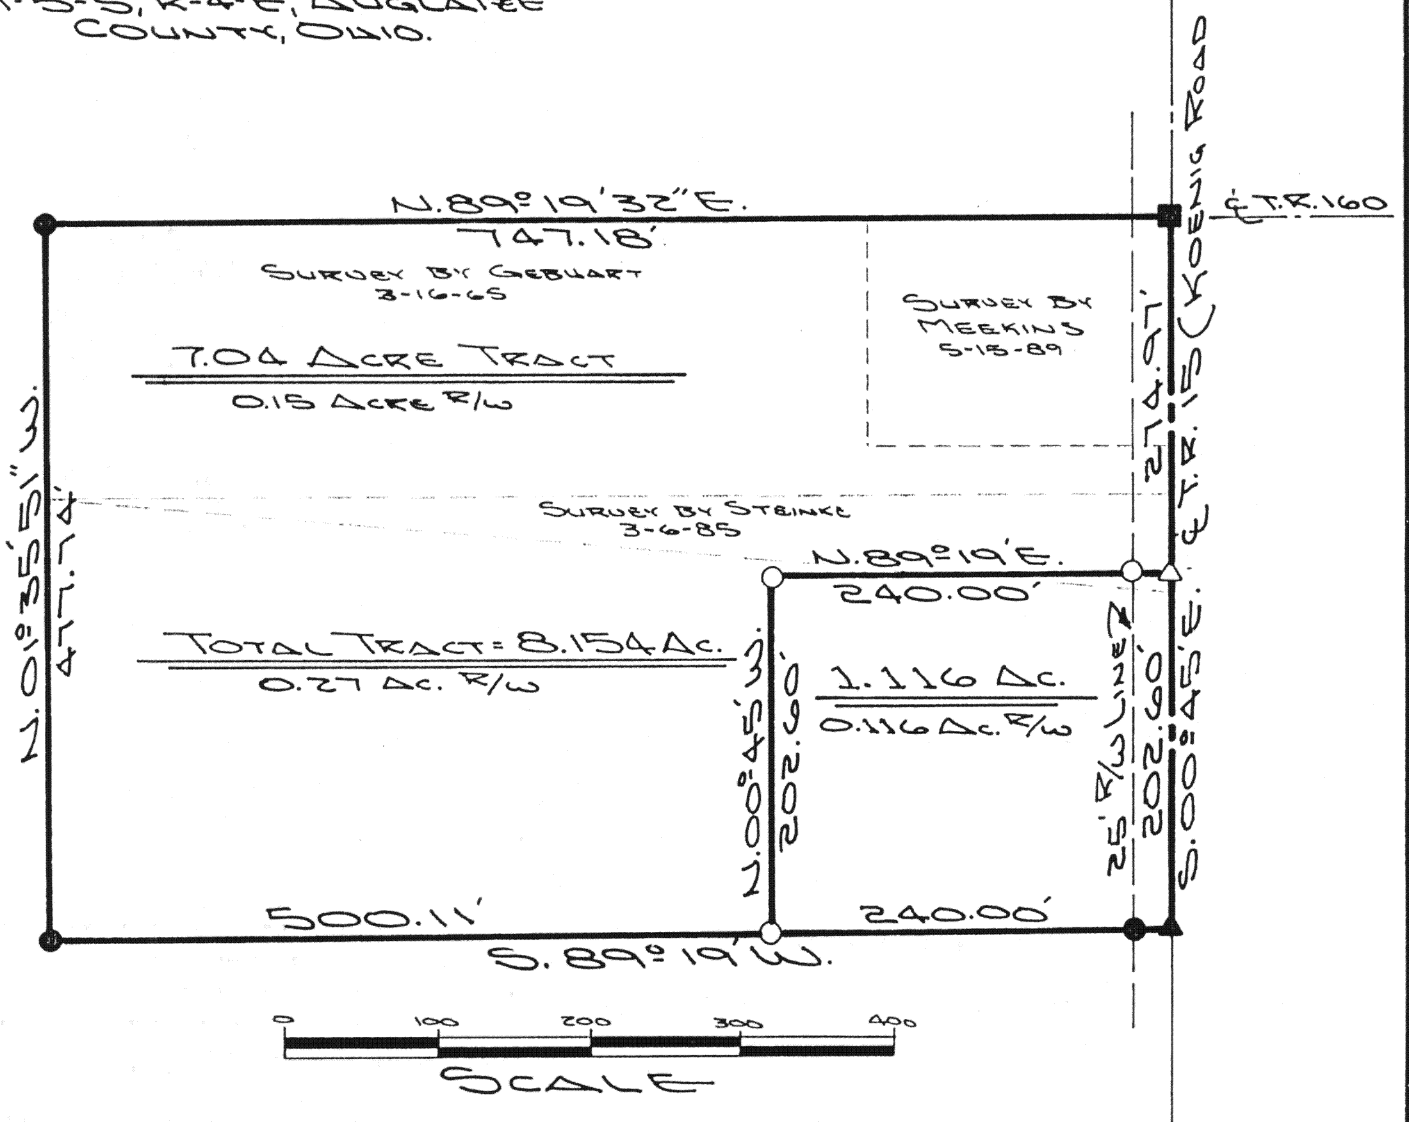

BEDRINGS FOR THIS SURVEY ARE BASED ON
THE C. OF T.R. 15 AS S.00°45'E. AS REPORTED
BY GEBHART'S SURVEY OF 3-16-65. HIS MONUMENTS
WERE USED AS FOUND.

THIS PLAT IS RECORDED IN SURVEY BOOK "I",
PAGE 83, IN THE AUGLAIZE COUNTY ENGINEER'S OFFICE.




ATTEST:

John W. Jauert

JOHN W. JAUBERT
PROFESSIONAL
SURVEYOR NO 6920

Jauert
ASSOCIATES



Surveying
AND LAND CONSULTING

RT.3 BOX 449 WAPAKONETA, OHIO 45895
PH. (419) 738-8962

I-83

Client MARK RASNEOR
County AUGLAIZE Township NOBLE
Section 30 T. 5 S., R. 4 E. Drwg. No. 90-527
Drawn By J. JAUBERT Date 3-14-90
Scale SHOWN Sheet 1 of 4



SURVEYOR'S DESCRIPTION FOR 1.116 ACRE TRACT

The following described tract of land is part of the Northeast Quarter of the Northwest Quarter of Section 30, Town 5 South, Range 4 East, Noble Township, Auglaize County, Ohio and is more particularly described as follows:

Commencing at a monument box at the Northeast corner of the Northwest Quarter of Section 30, Noble Township, being in the intersection of the centerlines of Township Road 160 (Glynwood Road) and Township Road 15 (Koenig Road);

thence S.00°45'00"E. along the centerline of Township Road 15 and the East line of the Northwest Quarter of Section 30, Noble Township, a distance of 274.97 feet to a R.R. spike set which is the PLACE OF BEGINNING for the tract of land herein described;

thence continuing S.00°45'00"E. along the centerline of Township Road 15 and the East line of the Northwest Quarter of said Section 30, a distance of 202.60 feet to a R.R. spike found;


thence S.89°19'00"W. along the existing property line, a distance of 240.00 feet to an iron pin set, passing thru an iron pipe found at 25.00 feet in the West right-of-way line of Township Road 15;

thence N.00°45'00"W., parallel to the centerline of Township Road 15 and the East line of the Northwest Quarter of Section 30, a distance of 202.60 feet to an iron pin set;

thence N.89°19'00"E. a distance of 240.00 feet to a R.R. spike, passing thru an iron pin set for reference at 215.00 feet in the West right-of-way line of Township Road 15, said R.R. spike was the true PLACE OF BEGINNING.


Containing in all 1.116 acre of which 0.116 acre has been dedicated for highway purposes. The above described tract of land is subject to all legal easements, restrictions and reservations, if any, of record or in use on said premises. Previous deed reference: Volume 265, page 675 and OR 19, page 224. This plat is recorded in Survey Book "I", page 83, in the Auglaize County Engineer's Office.

ATTEST:

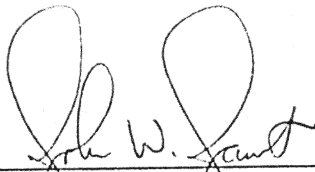
John W. Jauert
Professional Surveyor No. 6920



Jauert
ASSOCIATES



Surveying
AND LAND CONSULTING

RT.3 BOX 449 WAPAKONETA, OHIO 45895
PH. (419) 738-8962

T-84

Client MARK RASNEAR

County _____ Township _____

Section _____ T. _____ S. _____ R. _____ E. Drwg. No. 90-527

Drawn By _____ Date _____

Scale _____ Sheet 2 of 4



SURVEYOR'S DESCRIPTION FOR 7.04 ACRE TRACT

The following described tract of land is part of the Northeast Quarter of the Northwest Quarter of Section 30, Town 5 South, Range 4 East, Noble Township, Auglaize County, Ohio and is more particularly described as follows:

The PLACE OF BEGINNING is at a monument box at the Northeast corner of the Northwest Quarter of Section 30, Noble Township, being in the intersection of the centerlines of Township Road 160 (Glynwood Road) and Township Road 15 (Koenig Road);

thence S.00°45'00"E. along the centerline of Township Road 15 and the East line of the Northwest Quarter of Section 30, Noble Township, a distance of 274.97 feet to a R.R. spike set;

thence S.89°19'00"W. a distance of 240.00 feet to an iron pin set, passing thru an iron pin set for reference at 25.00 feet in the West right-of-way line of Township Road 15;

thence S.00°45'00"E., parallel to the centerline of Township Road 15 and the East line of the Northwest Quarter of Section 30, Noble Township, a distance of 202.60 feet to an iron pin set;


thence S.89°19'00"W. along the existing property line, a distance of 500.11 feet to an iron pipe found;

thence N.01°35'51"W. along the existing property line, a distance of 477.74 feet to an iron pipe found;

thence N.89°19'32"E. a distance of 747.18 feet to a monument box, which was the true PLACE OF BEGINNING;


Containing in all 7.04 acre of which 0.15 acre has been dedicated for highway purposes. The above described tract of land is subject to all legal easements, restrictions and reservations, if any, of record or in use on said premises. Previous deed reference: Volume 265, page 675, OR 19, page 224 and OR 85, page 918. This plat is recorded in Survey Book "I", page 83, in the Auglaize County Engineer's Office.

ATTEST:

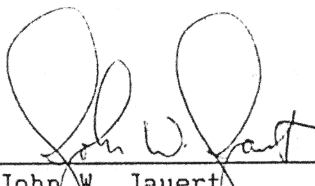
John W. Jauert
Professional Surveyor No. 6920



Jauert
ASSOCIATES



Surveying
AND LAND CONSULTING

RT.3 BOX 449 WAPAKONETA, OHIO 45895
PH. (419) 738-8962

I-85

Client MARK RASNEOR
County _____ Township _____
Section _____ T. _____ S. _____ R. _____ E. Drwg. No. 90-527
Drawn By _____ Date _____
Scale _____ Sheet 3 of 4



SURVEYOR'S DESCRIPTION FOR 8.154 ACRE TRACT

The following described tract of land is part of the Northeast Quarter of the Northwest Quarter of Section 30, Town 5 South, Range 4 East, Noble Township, Auglaize County, Ohio and is more particularly described as follows:

The PLACE OF BEGINNING is at a monument box at the Northeast corner of the Northwest Quarter of Section 30, Noble Township, being in the intersection of the centerlines of Township Road 160 (Glynwood Road) and Township Road 15 (Koenig Road);

thence S.00°45'00"E. along the centerline of Township Road 15 and the East line of the Northwest Quarter of Section 30, Noble Township, a distance of 477.57 feet to a R.R. spike found;


thence S.89°19'00"W. along the existing property line, a distance of 740.11 feet to an iron pipe found, passing thru an iron pipe found at 25.00 feet in the West right-of-way line of Township Road 15;


thence N.01°35'51"W. along the existing property line, a distance of 477.74 feet to an iron pipe found;

thence N.89°19'32"E. a distance of 747.18 feet to a monument box, which was the true PLACE OF BEGINNING;


Containing in all 8.154 acre of which 0.27 acre has been dedicated for highway purposes. The above described tract of land is subject to all legal easements, restrictions and reservations, if any, of record or in use on said premises. Previous deed reference: Volume 265, page 675, OR 19, page 224 and OR 85, page 918. This plat is recorded in Survey Book "I", page 83, in the Auglaize County Engineer's Office.

ATTEST:

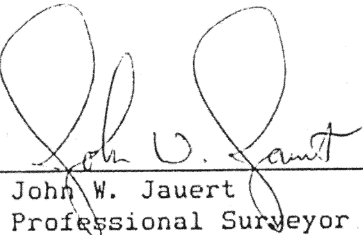
John W. Jauert
Professional Surveyor No. 6920



Jauert
ASSOCIATES



Surveying
AND LAND CONSULTING

RT.3 BOX 449 WAPAKONETA, OHIO 45895
PH. (419) 738-8962

I-86

Client MARK RAGNEOR
County _____ Township _____
Section _____ T. _____ S. _____ R. _____ E. Drwg. No. 90-527
Drawn By _____ Date _____
Scale _____ Sheet 4 of 4