


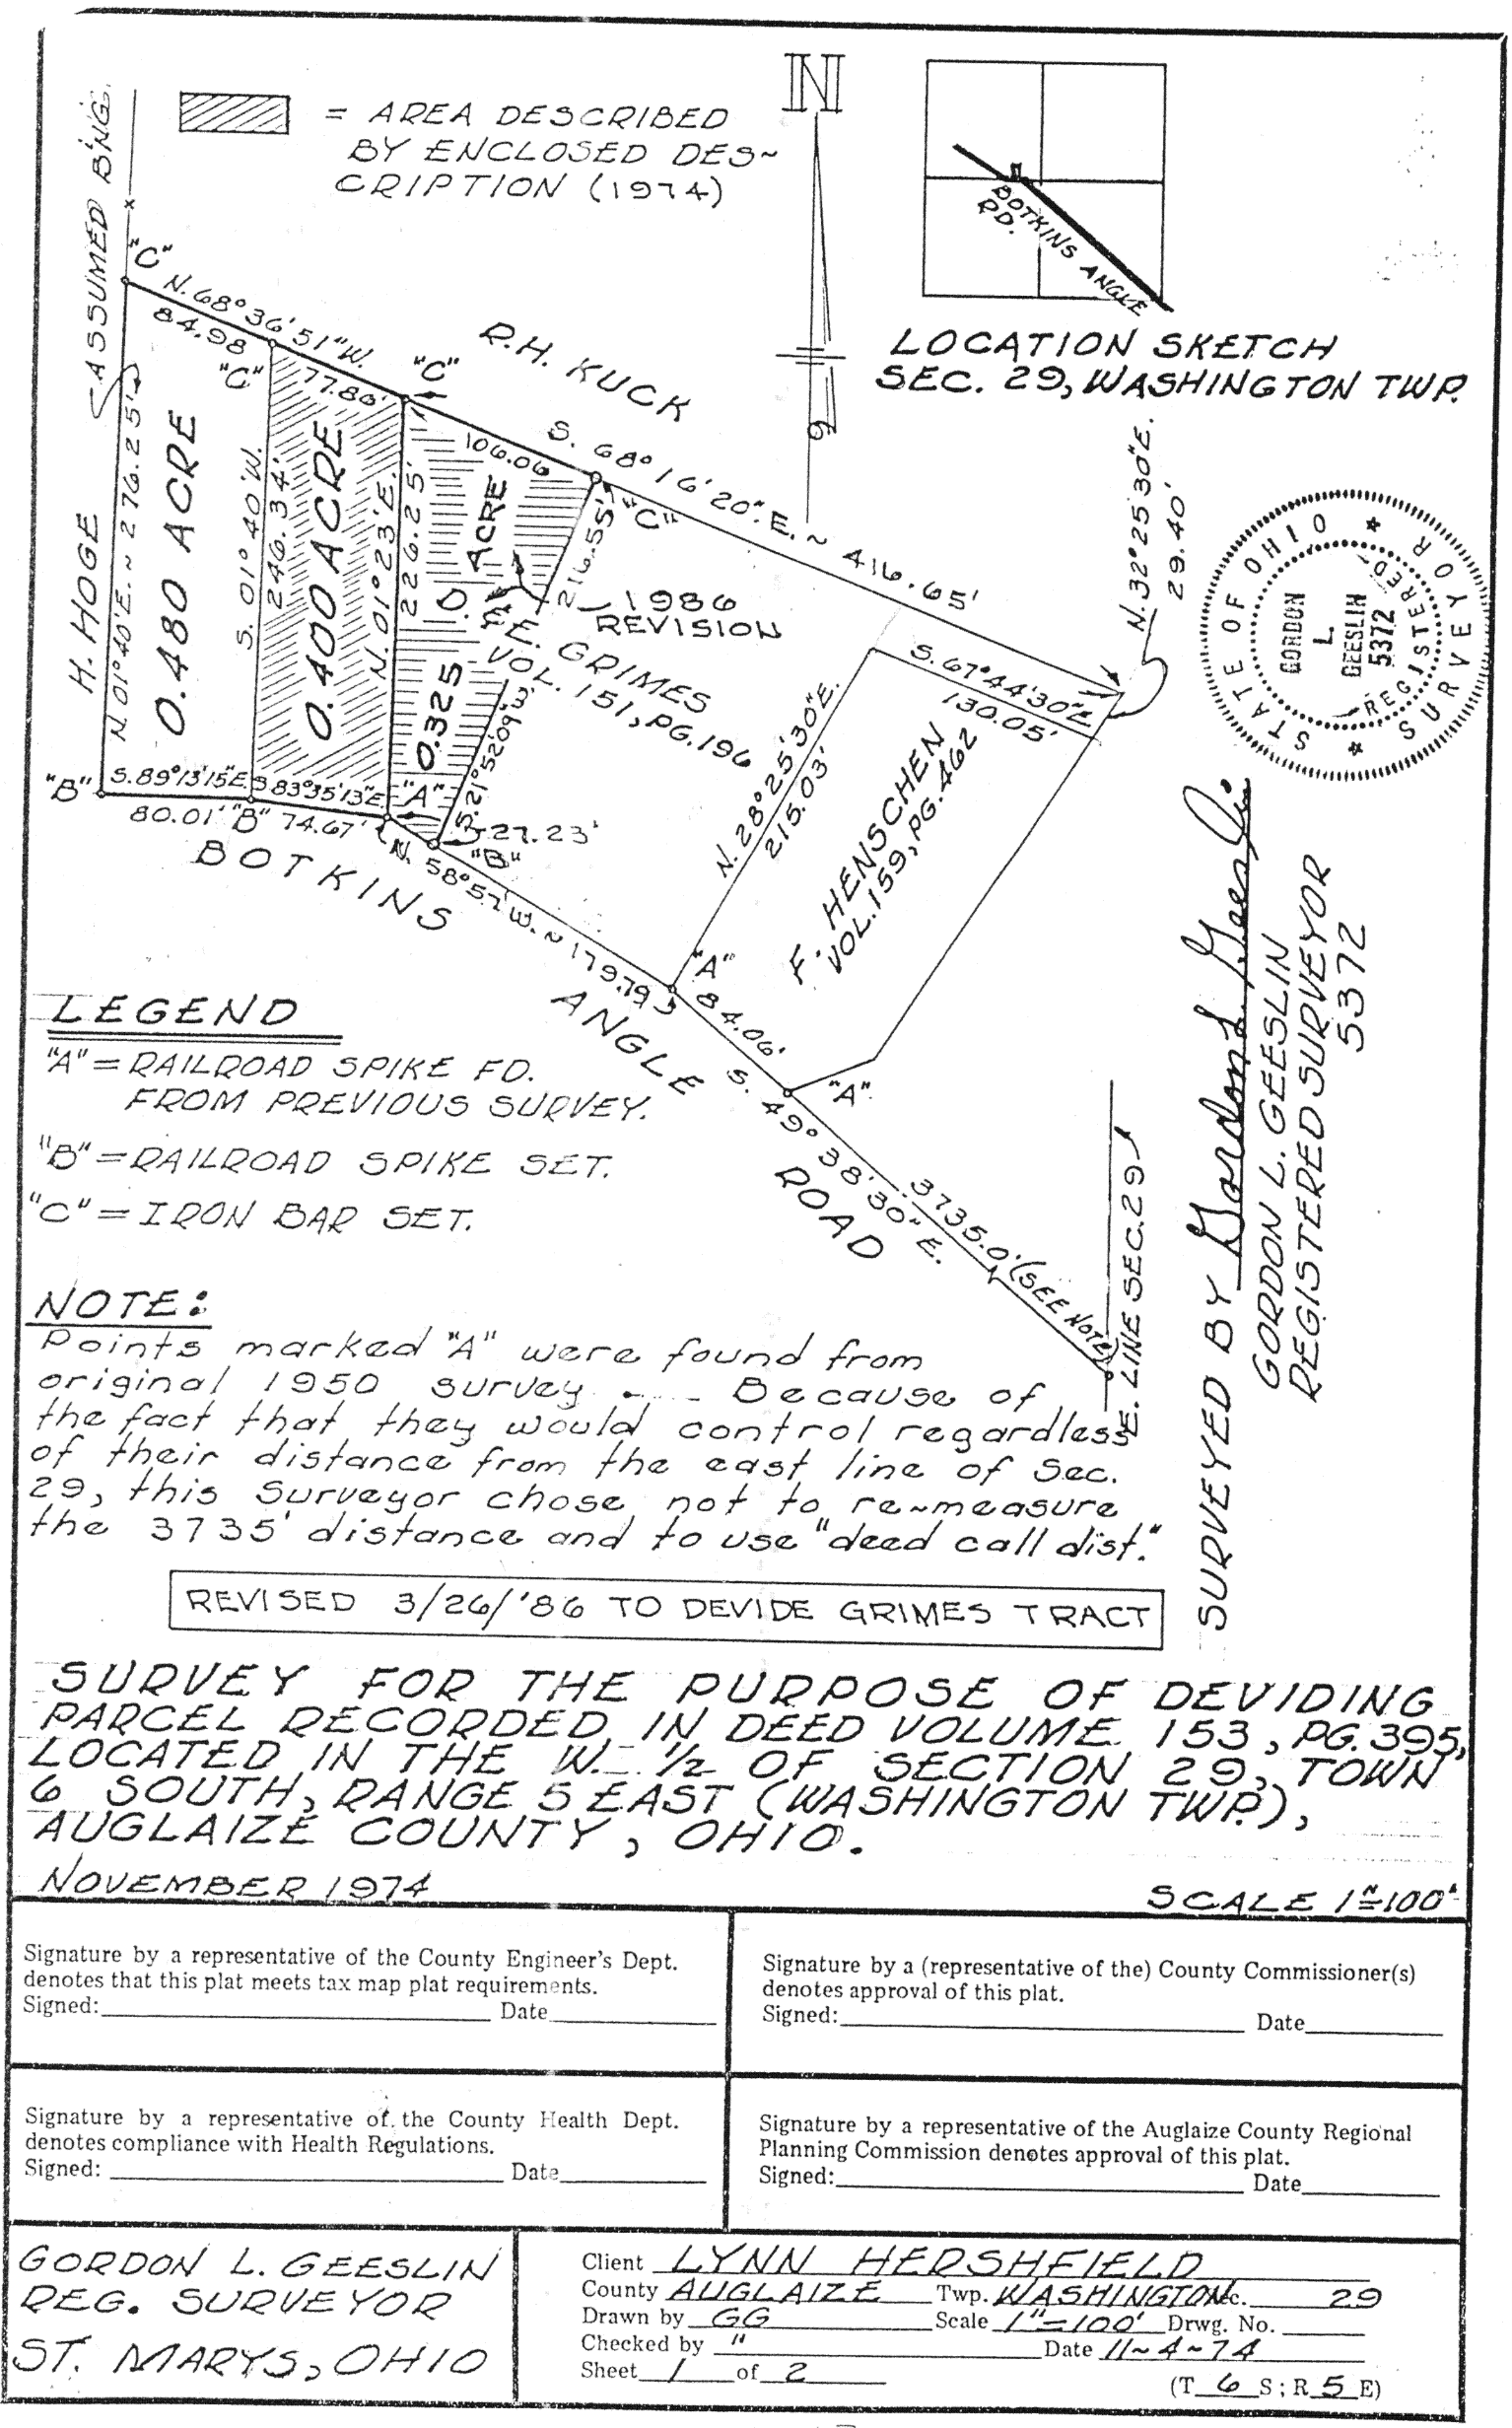




= AREA DESCRIBED BY ENCLOSED DESCRIPTION (1974)

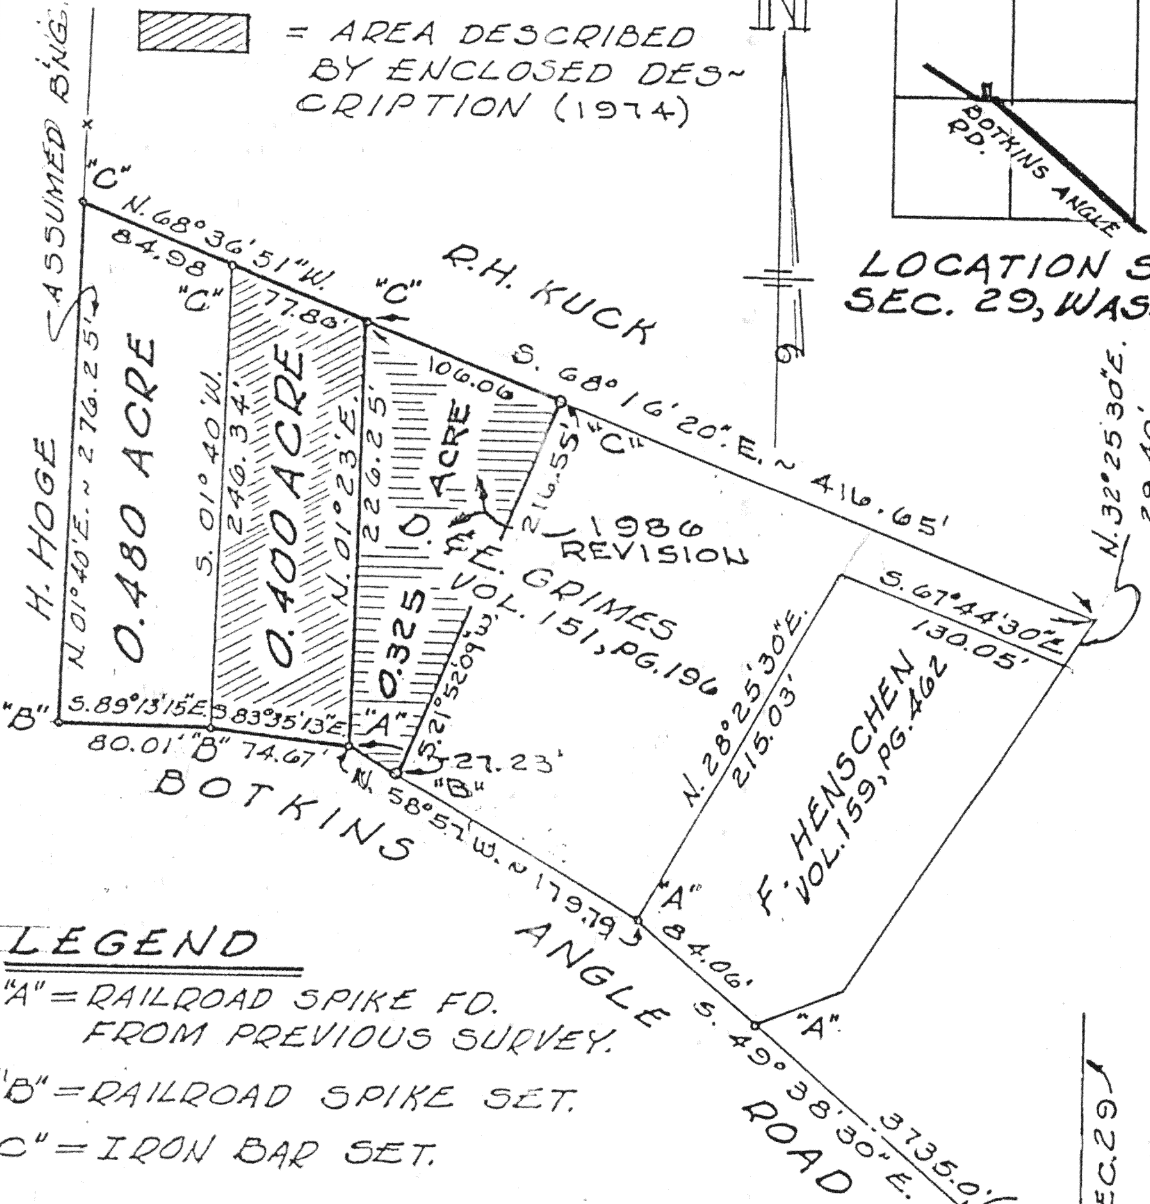

LOCATION SKETCH
SEC. 29, WASHINGTON TWP.



LEGEND

- "A" = RAILROAD SPIKE FD. FROM PREVIOUS SURVEY.
- "B" = RAILROAD SPIKE SET.
- "C" = IRON BAR SET.

NOTE:

Points marked "A" were found from original 1950 survey. Because of the fact that they would control regardless of their distance from the east line of Sec. 29, this surveyor chose not to re-measure the 3735' distance and to use "deed call dist."

REVISED 3/26/86 TO DEVIDE GRIMES TRACT

SURVEY FOR THE PURPOSE OF DEVIDING PARCEL RECORDED IN DEED VOLUME 153, PG. 395, LOCATED IN THE W. 1/2 OF SECTION 29, TOWN 6 SOUTH, RANGE 5 EAST (WASHINGTON TWP), AUGLAIZE COUNTY, OHIO.

NOVEMBER 1974

SCALE 1"=100'

Signature by a representative of the County Engineer's Dept. denotes that this plat meets tax map plat requirements.
Signed: _____ Date _____

Signature by a (representative of the) County Commissioner(s) denotes approval of this plat.
Signed: _____ Date _____

Signature by a representative of the County Health Dept. denotes compliance with Health Regulations.
Signed: _____ Date _____

Signature by a representative of the Auglaize County Regional Planning Commission denotes approval of this plat.
Signed: _____ Date _____

GORDON L. GEESLIN
REG. SURVEYOR
ST. MARYS, OHIO

Client LYNN HERSHFIELD
County AUGLAIZE Twp. WASHINGTON No. 29
Drawn by GG Scale 1"=100' Drwg. No. _____
Checked by " Date 11-4-74
Sheet 1 of 2
(T 6 S; R 5 E)