


LEGEND

- = AUG. CO. MON. BOX (PIN OVER C.S.)
- = P.K. NAIL SET.
- = 5/8" IRON BAR SET.

LOCATION SKETCH

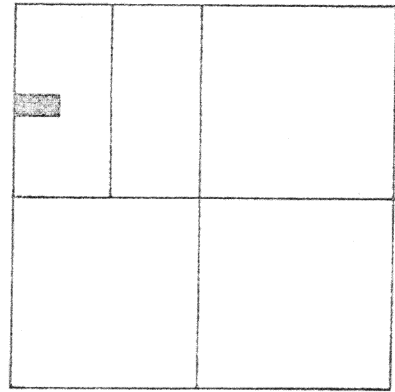

SECTION 4

N.W. COR.
SEC. 4

W. LINE ~ N.W. 1/4 ~ SEC. 4 & S.R. 116

SOUTH ~ 2735.73

1362.66
30' R/W LINE
265.89
1107.18

WEST ~ 663.14
633.14

EAST ~ 663.14

4.048 ACRES
(0.183 AC. IN R/W)

NORTH


265.89

SURVEYED BY

James W. Geeslin

JAMES W. GEESLIN
P.S. 7764

W. 1/4 PT.
SEC. 4

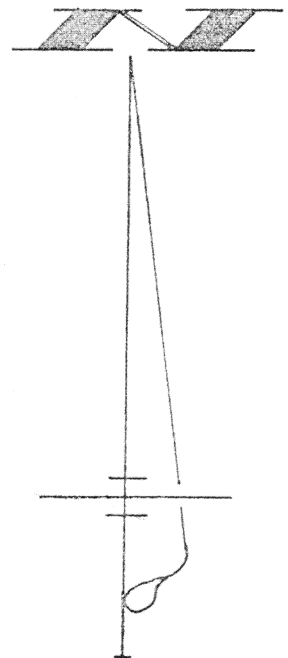

GEESLIN SURVEY

PT. ~ W. 1/2 ~ N.W. 1/4 ~ SECTION 4, T. 5 S.,
R. 4 E., (SALEM TWP.), AUGLAIZE
COUNTY, OHIO.

FEB. 28, 1998

SCALE 1" = 200'




L-250

GEESLIN
LAND SURVEYING

810 EAST MARKET STREET

CELINA, OHIO

PHONE (419) 586-6155



PERMANENT
PARCEL No. _____

Part of: _____ Sec. _____ T. _____ R. _____ Township

Grantor: _____ Area Retained: _____ Acres

Grantee: _____ Area Transferred: _____ Acres

Deed References: _____

APPROVALS
AGENCY
DATE

Board of Health

County Sanitary Engineer

County Engineer

GEESLIN SURVEYING

REGISTERED LAND SURVEYORS

PHONE 419 586 6155

February 28, 1998

OELLERMAN SURVEY

Being a parcel of land situated in Salem Township, Auglaize County, Ohio, in the west half of the northwest quarter of Section 4, Township 5 South, Range 4 East. Being more particularly described as follows:

Commencing for reference at an iron pin over the cornerstone at the northwest corner of said Section 4-

Thence, south, along the west line of the northwest quarter of said Section 4 and the centerline of State Route 116, a distance of one thousand three hundred sixty-two and 66/100 (1362.66) feet to a "P.K." nail. Said point being the place of beginning for the parcel of land to be conveyed by this instrument-

Thence, continuing, south, along the last described line, a distance of two hundred sixty-five and 89/100 (265.89) feet to a "P.K." nail-

Thence, east, a distance of six hundred sixty-three and 14/100 (663.14) feet to a 5/8 inch iron bar-

Thence, north, a distance of two hundred sixty-five and 89/100 (265.89) feet to a 5/8 inch iron bar-


Thence, west, a distance of six hundred sixty-three and 14/100 (663.14) feet to the place of beginning.


Containing 4.048 acres of land more or less.

Subject to all easements and right-of-way of record.

Reference is made to a survey of this area by James W. Geeslin, Professional Surveyor 7764, dated February 28, 1998, on file in the County Engineer's Office.

Surveyed by


James W. Geeslin
Professional Surveyor 7764



L-251