


LEGEND

- "A" COR. STONE @ E. 1/4 POST OF SEC. 28.
- "B" 5/8" IRON BAR FD.
- "C" R.R. SPIKE FD.
- "D" "P.K." NAIL FD.
- "E" MINE SPIKE SET.
- "F" 5/8" x 30" IRON BAR SET.

I.P. @
N.E. 1/4
~ SEC. 28


NOTE: PLAT DISTANCE "A" TO "D" =
1210.00; MEASURED = 1210.23.

LOCATION SKETCH



N. E. 1/4 ~ SEC. 28

D. WHETSTONE
N. 245; PG. 879

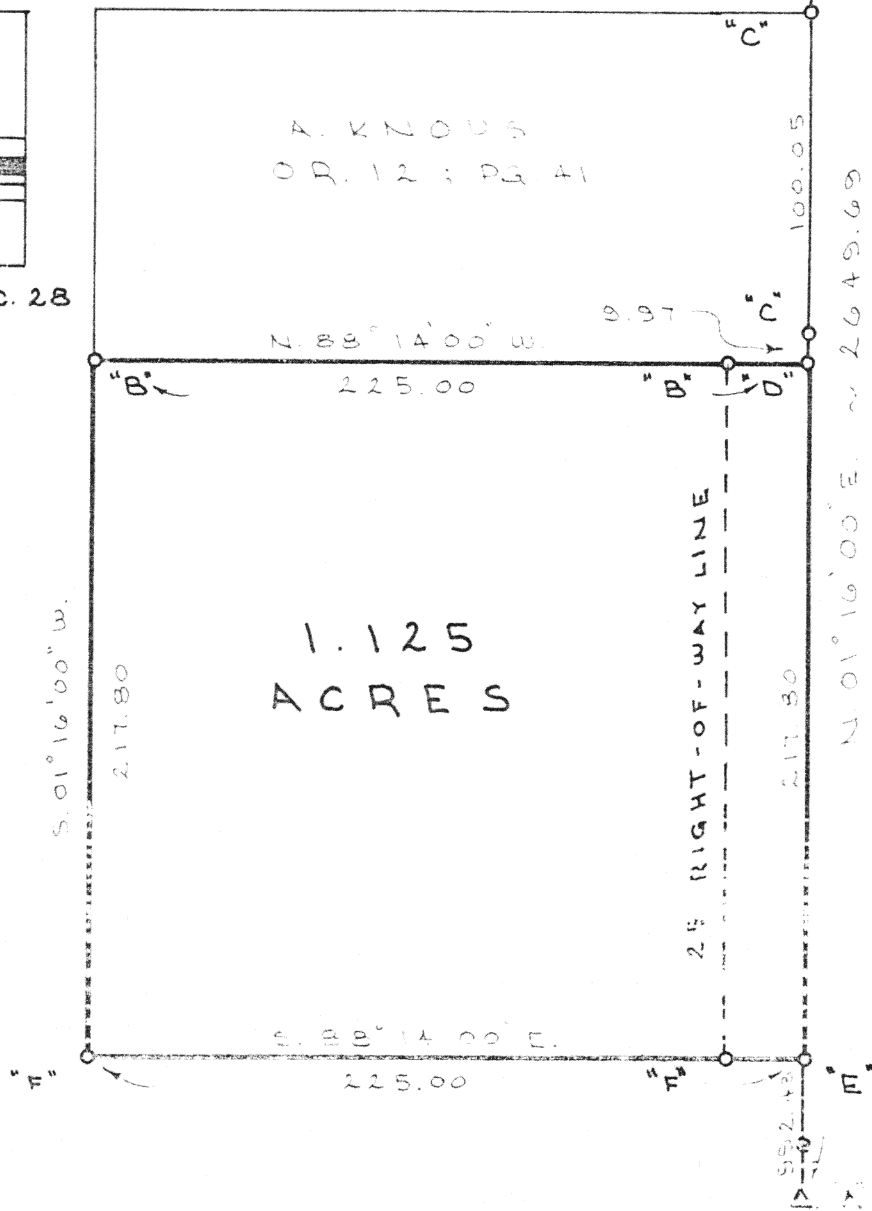

E. 1/4 ~ N.E. 1/4 ~ SEC. 28 & ST. MARYS RIVER RD.

SURVEYED BY
Gordon L. Geeslin
GORDON L. GEESLIN
REGISTERED SURVEYOR
N 85372

UHLENHAKE SURVEY

PART OF THE E. 1/2 OF THE S.E. 1/4 OF THE
N.E. 1/4 OF SECTION 28, TOWN 3 SOUTH,
RANGE 4 EAST, (NOBLE TWP.), AUGLAIZE
COUNTY, OHIO.

JANUARY 11, 1991

SCALE 1" = 60'

L-515


GORDON L. GEESLIN

LAND SURVEYOR

810 EAST MARKET STREET

CELINA, OHIO

PHONE (419) 586-6155



PERMANENT
PARCEL No

Part of _____ Sec _____ T _____ R _____ Township

Grantor: _____ Area Retained: _____ Acres

Grantee: _____ Area Transferred: _____ Acres

Deed References: _____

APPROVALS

REC'D

DATE

Board of Health

County Surveyor/Engineer

Notary Public