
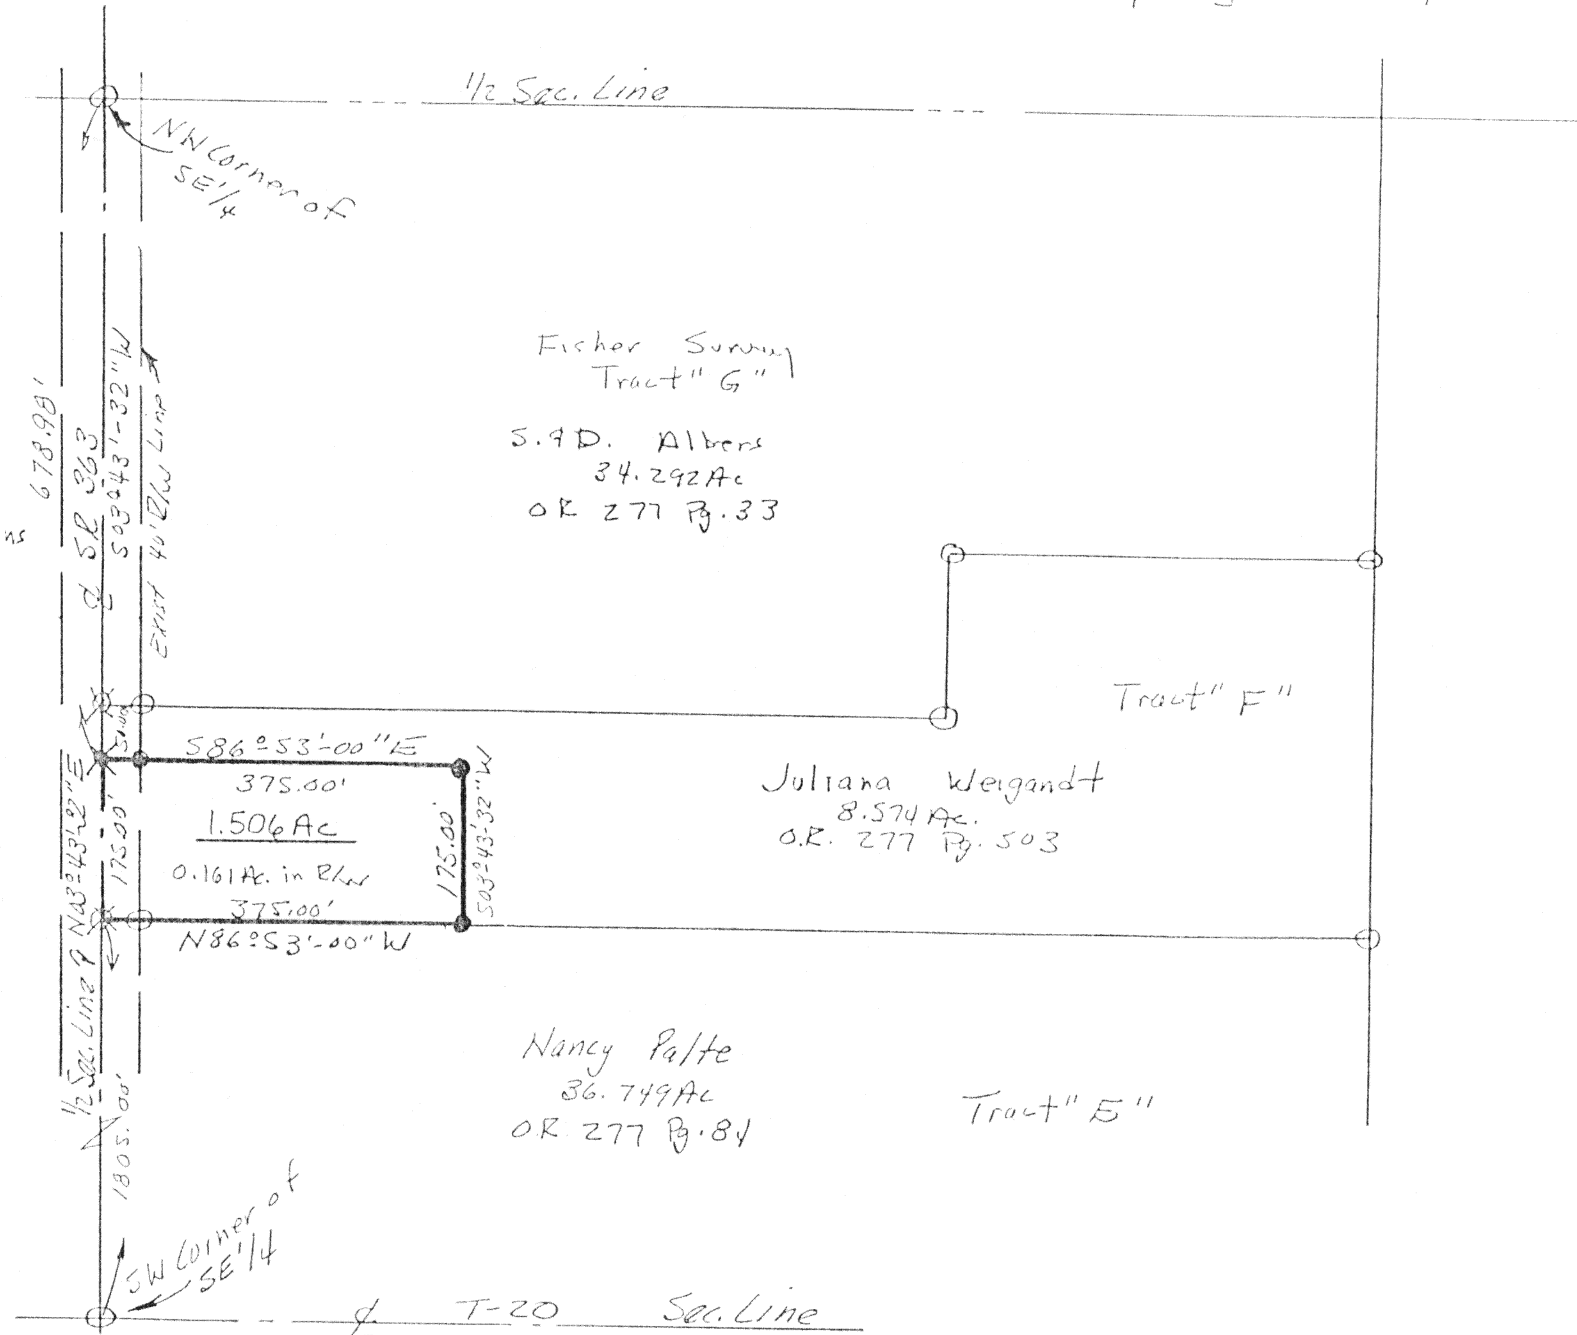


WEIGANDT SURVEY
Part of the SE 1/4 of Sec. 36, T7S, R4E,
Jackson Twp, Auglaize Co., Ohio

1" = 200'

Bearing from SR 363 R/W Plans

○ = IP fd
⊗ = P.K. Nail fd.
⊗ = P.K. Nail set
● = N° S Rebar set

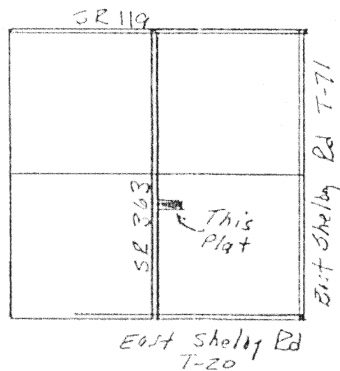

Surveyed 31 May 1997

William G. Fultz, Jr.

William G. Fultz, Jr. P.S. N° 5173

L-678

William G. Fultz Jr.

Professional Surveyor
819 Lori Court
Sidney, OH 45365
(937) 492-9674

WEIGANDT DESCRIPTION

Part of the SE 1/4 of Sec. 36, T7S, R4E,
Jackson Twp., Auglaize Co., Ohio:

Commencing at an iron pin found in the southwest corner of the southeast quarter of said section 36, said iron pin also being at the intersection of T - 20 and S.R. 363;

Thence N03°-43'-32"E, along the west line of said southeast quarter and the center of S.R. 363, 1805.00 ft. to a P.K. Nail found in the southwest corner of the premises recorded in O.R. 277 Pg. 503;


Thence continuing N03°-43'-32"E, along said west line, 175.00 ft. to a P.K. Nail;

Thence S86°-53'-00"E, 375.00 ft. to an iron pin, passing for reference an iron pin set at 40.00 ft.;

Thence S03°-43'-32"W, 175.00 ft. to an iron pin set on the south line of the premises recorded in O.R. 277 Pg. 503;

Thence N86°-53'-00"W, along said south line, 375.00 ft. to the place of beginning, passing for reference an iron pin at 335.00 ft.

Containing 1.506 Ac. more or less, of which 0.161 Ac. are in the R/W, being subject to all legal highways and easements of record, and being part of the premises recorded in O.R. 277 Pg. 503 of the Auglaize Co. Deed Records. Bearing from S.R. 363 R/W Plans.

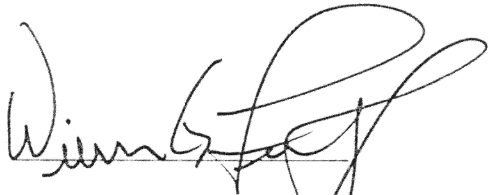

William G. Fultz, Jr.
Reg. Surveyor No. 5173
June, 1997

L-679