


LIL-7

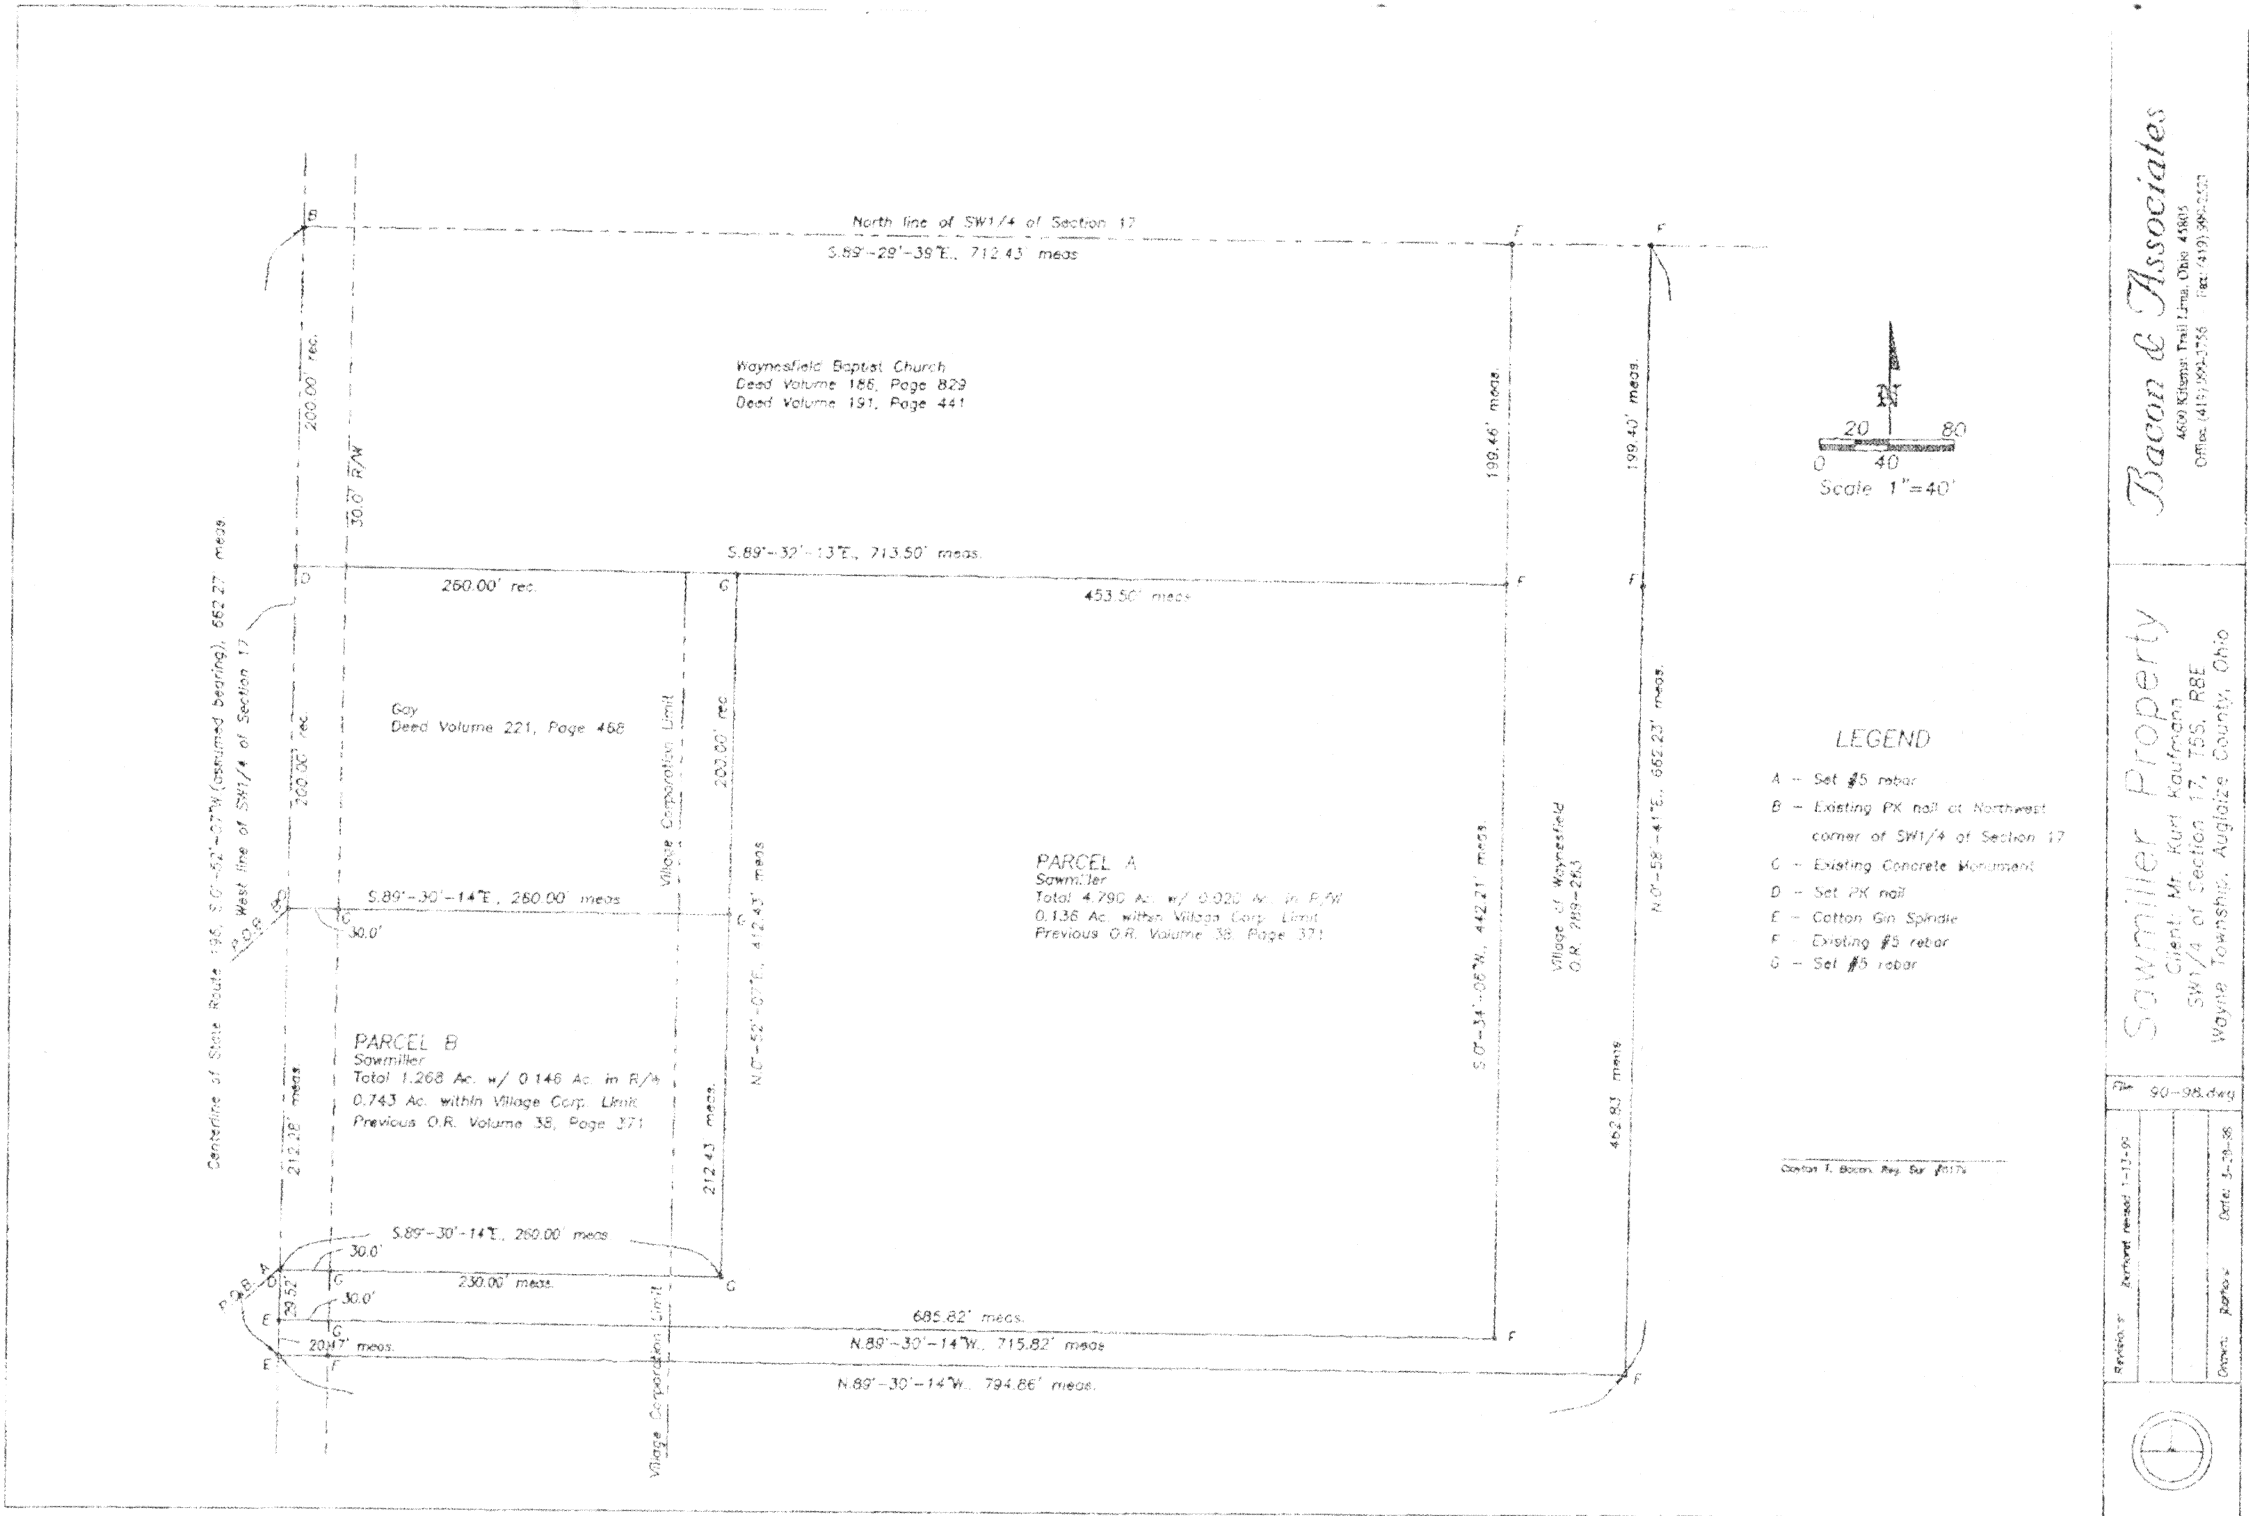

Bacon & Associates

Engineering and Surveying

4600 Kitamat Trail

Phone: (419) 999-3756

Lima, Ohio 45805

FAX: (419) 999-2523

DESCRIPTION

Parcel A

Being a parcel of land in the SW1/4 of Section 17, T5S, R8E, Wayne Township, Auglaize County, Ohio and more particularly described as follows:

Beginning at a set PK nail on the west line of the SW1/4 of Section 17 (centerline of State Route 196), S.0°-52'-07"W. (assumed bearing), 612.28' from an existing PK nail at the northwest corner of the SW1/4 of said section, thence the following courses;

1. S.89°-30'-14"E., 260.00' to a set #5 rebar, passing over a set #5 rebar at 30.00';
2. N.0°-52'-07"E., 412.43' to a set #5 rebar, passing over a set #5 rebar at 212.43';
3. S.89°-32'-13"E., 453.50' to an existing #5 rebar;
4. S.0°-34'-06"W., 442.21' to an existing #5 rebar;
5. N.89°-30'-14"W., 715.82' to an existing cotton gin spindle on the west line of said section, passing over a set #5 rebar at 685.82';
6. N.0°-52'-07"E. on the said west line, 29.52' to the POINT OF BEGINNING.

The above-described parcel contains 4.790 acres, more or less, subject to all legal highways and easements of record of which 0.136 acres is within the Village Corporation Limit.

Part of O.R. Volume 38, Page 371.

Bacon & Associates

Engineering and Surveying

4600 Kitamat Trail

Phone: (419) 999-3756
FAX: (419) 999-2523Lima, Ohio 45805

DESCRIPTION**Parcel A**

Being a parcel of land in the SW $\frac{1}{4}$ of Section 17, T5S, R8E, Wayne Township, Auglaize County, Ohio and more particularly described as follows:

Beginning at a set PK nail on the west line of the SW $\frac{1}{4}$ of Section 17 (centerline of State Route 196), S.0°-52'-07"W (assumed bearing), 612.28' from an existing PK nail at the northwest corner of the SW $\frac{1}{4}$ of said section, thence the following courses:

1. S.89°-30'-14"E., 260.00' to a set #5 rebar, passing over a set #5 rebar at 30.00';
2. N.0°-52'-07"E., 412.43' to a set #5 rebar, passing over a set #5 rebar at 212.43';
3. S.89°-32'-13"E., 453.50' to an existing #5 rebar;
4. S.0°-34'-06"W., 442.21' to an existing #5 rebar;
5. N.89°-30'-14"W., 715.82' to an existing cotton gin spindle on the west line of said section, passing over a set #5 rebar at 685.82';
6. N.0°-52'-07"E. on the said west line, 29.52' to the POINT OF BEGINNING.

The above-described parcel contains 4.790 acres, more or less, subject to all legal highways and easements of record of which 0.136 acres is within the Village Corporation Limit.

Part of O.R. Volume 38, Page 371.