

SURVEY OF PART OF THE W. HALF OF THE S.W. QUARTER OF SECTION 4, TOWN 6 SOUTH, RANGE 4 EAST, (ST. MARYS TOWNSHIP), AUGLAIZE COUNTY, OHIO


CONTAINING 0.104 ACRES OF LAND MORE OR LESS
 WITH 0.039 ACRES BEING IN ROAD RIGHT-OF-WAY

CURVE DATA

DELTA = $1^{\circ}41'$
 D = $1^{\circ}00'$
 L = 168.33'
 R = 5729.58'
 T = 84.17'

CURVE DATA

DELTA = $4^{\circ}22'$
 D = $2^{\circ}00'$
 L = 218.34'
 R = 2864.79'

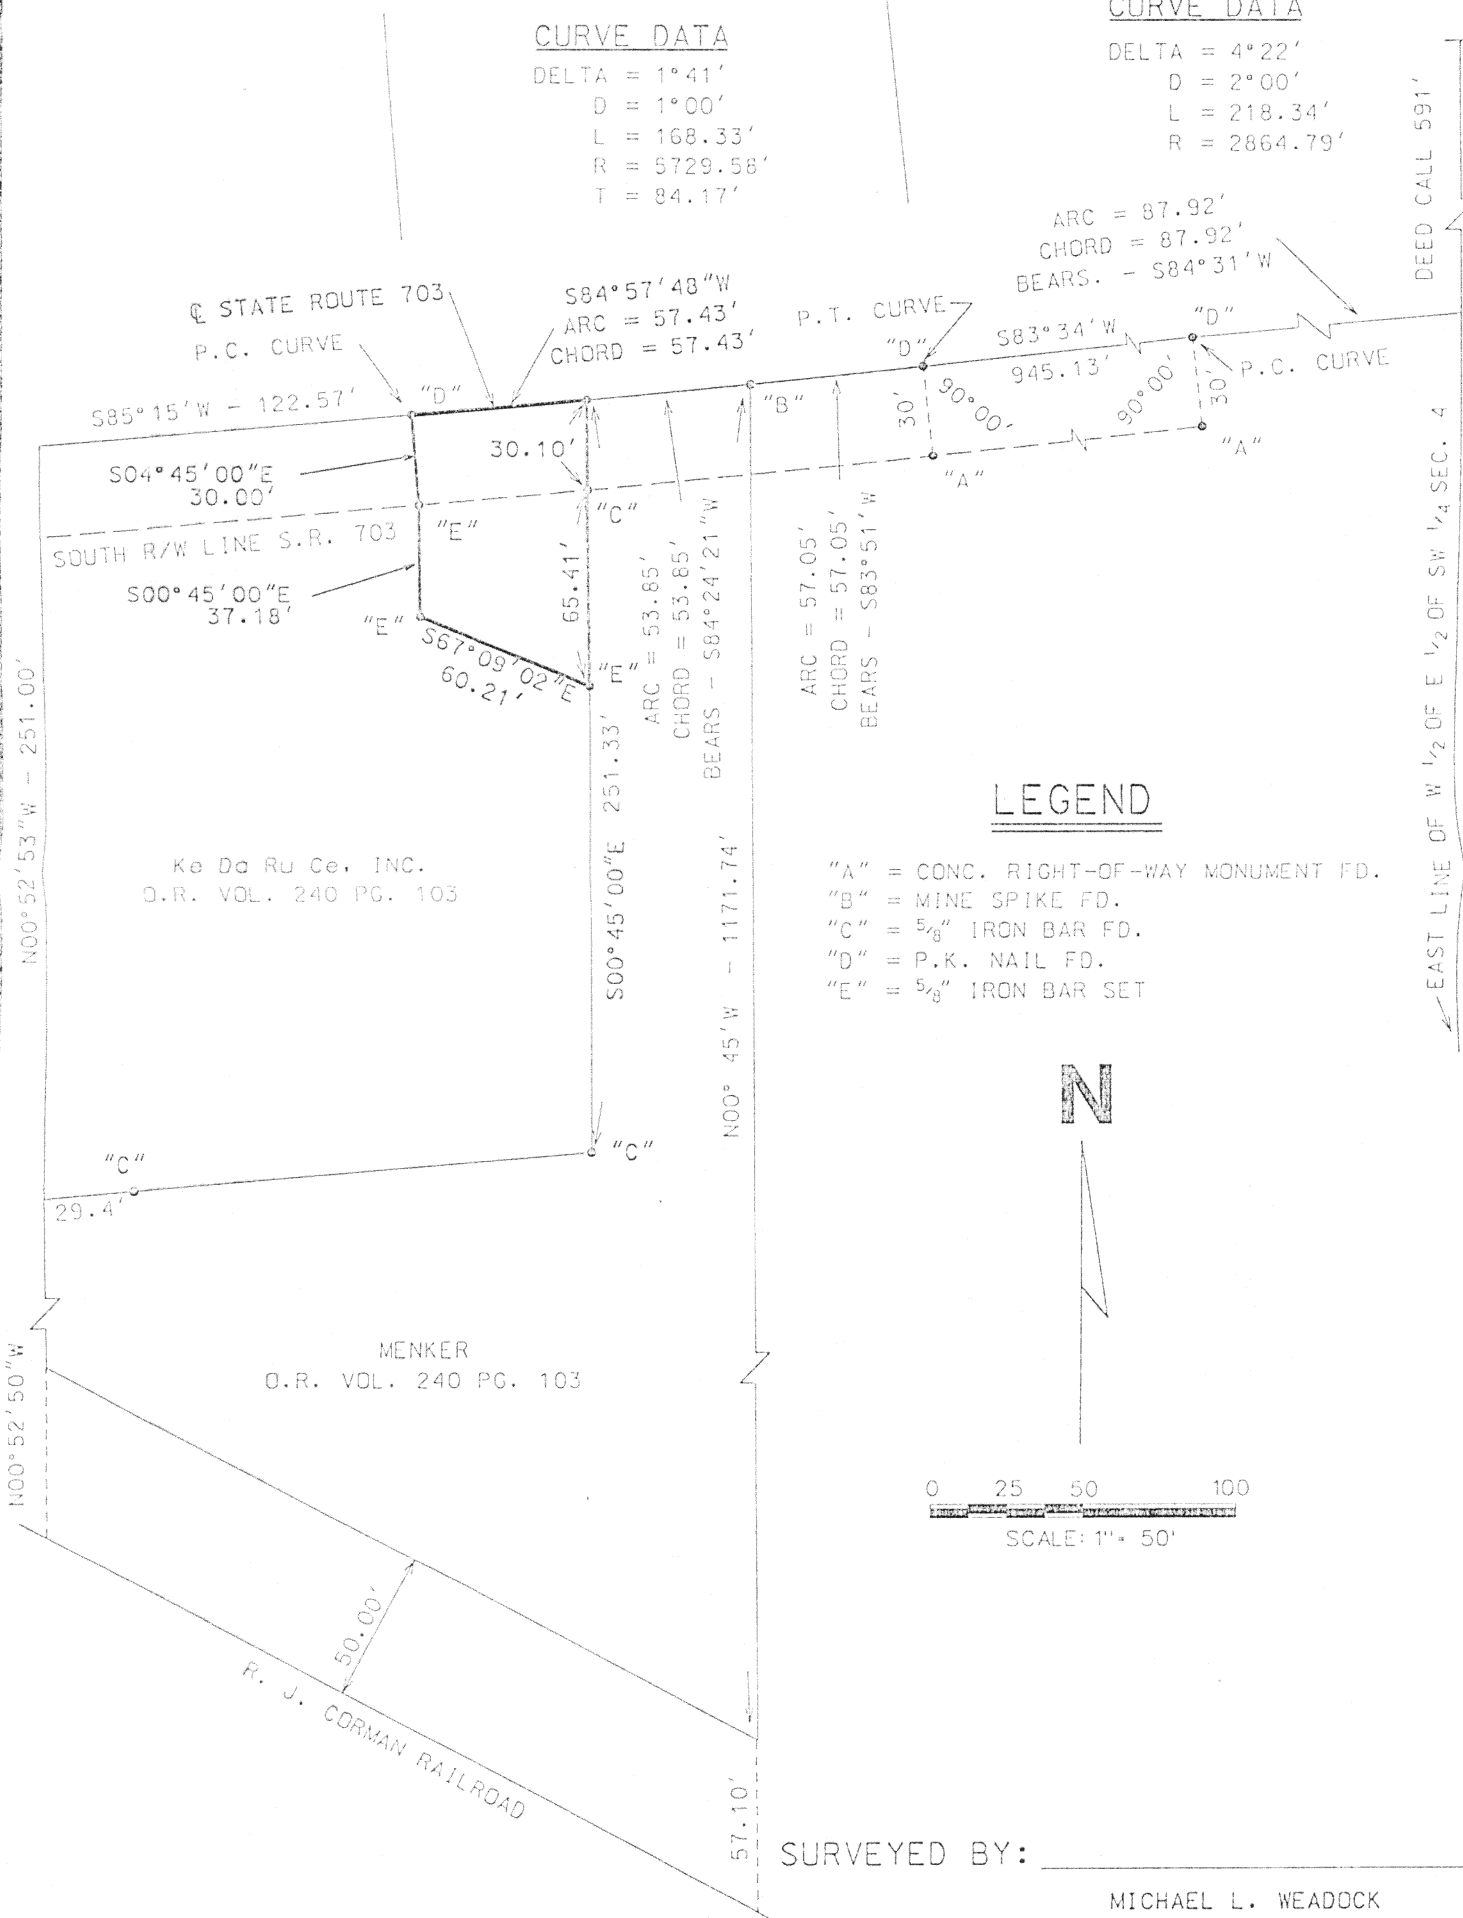

LEGEND

- "A" = CONC. RIGHT-OF-WAY MONUMENT FD.
- "B" = MINE SPIKE FD.
- "C" = $\frac{5}{8}$ " IRON BAR FD.
- "D" = P.K. NAIL FD.
- "E" = $\frac{5}{8}$ " IRON BAR SET

N

0 25 50 100
 SCALE: 1" = 50'

SURVEYED BY:

MICHAEL L. WEADOCK
 PROF. SURVEYOR NO. 6199
 ST. MARYS, OHIO

N-575