

SURVEY OF LOTS 120, 121, 122

Southmore Shores Subdivision Block "D"
 Situated in Section 17, St. Marys Township,
 Town-6-South, Range-4-East, County of Auglaize, State of Ohio
 See Plat Cabinet A, Slide 49



ATTEST

Ted K. Schnell



Ted K. Schnell
 Professional Engineer
 Professional Surveyor

CENTERLINE CURVE DATA

$\Delta = 45^{\circ}-00'$
 $R = 480.00'$
 $T = 198.82'$
 $L = 376.99'$

LEGEND

○ Iron Pin (set)

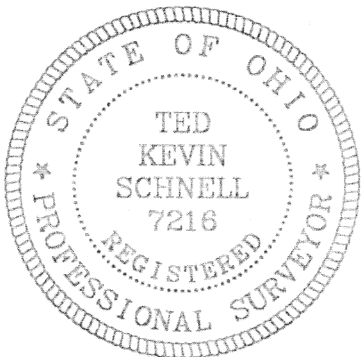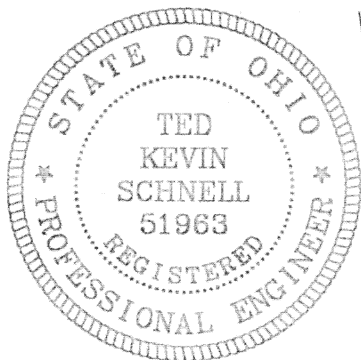


PROPERTY LINE CURVE DATA

A Chord Brng = N. $01^{\circ}-09'-35''$ W.
 Chord Dist = 36.13'
 Arc Length = 36.14'
 Radius = 505.00'

B Chord Brng = N. $04^{\circ}-17'-56''$ E.
 Chord Dist = 60.05'
 Arc Length = 60.08'
 Radius = 505.00'

SCALE



NOTES

The Basis of Bearings used for this Survey was determined from the Auglaize County Engineer's Global Positioning Survey

This Survey Plat and Description is Recorded in Survey Book 0

Page 86, Auglaize County Engineer's Tax Map Office.

H & S Civil Engineers and Land Surveyors

913 Fieldstone Court Wapakoneta, Ohio 45895

BURNS WREN, GREG SQUY

client

17

section

ST. MARYS

township

AUGLAIZE

county

OHIO

state

09/18/02

date



0-8-6