


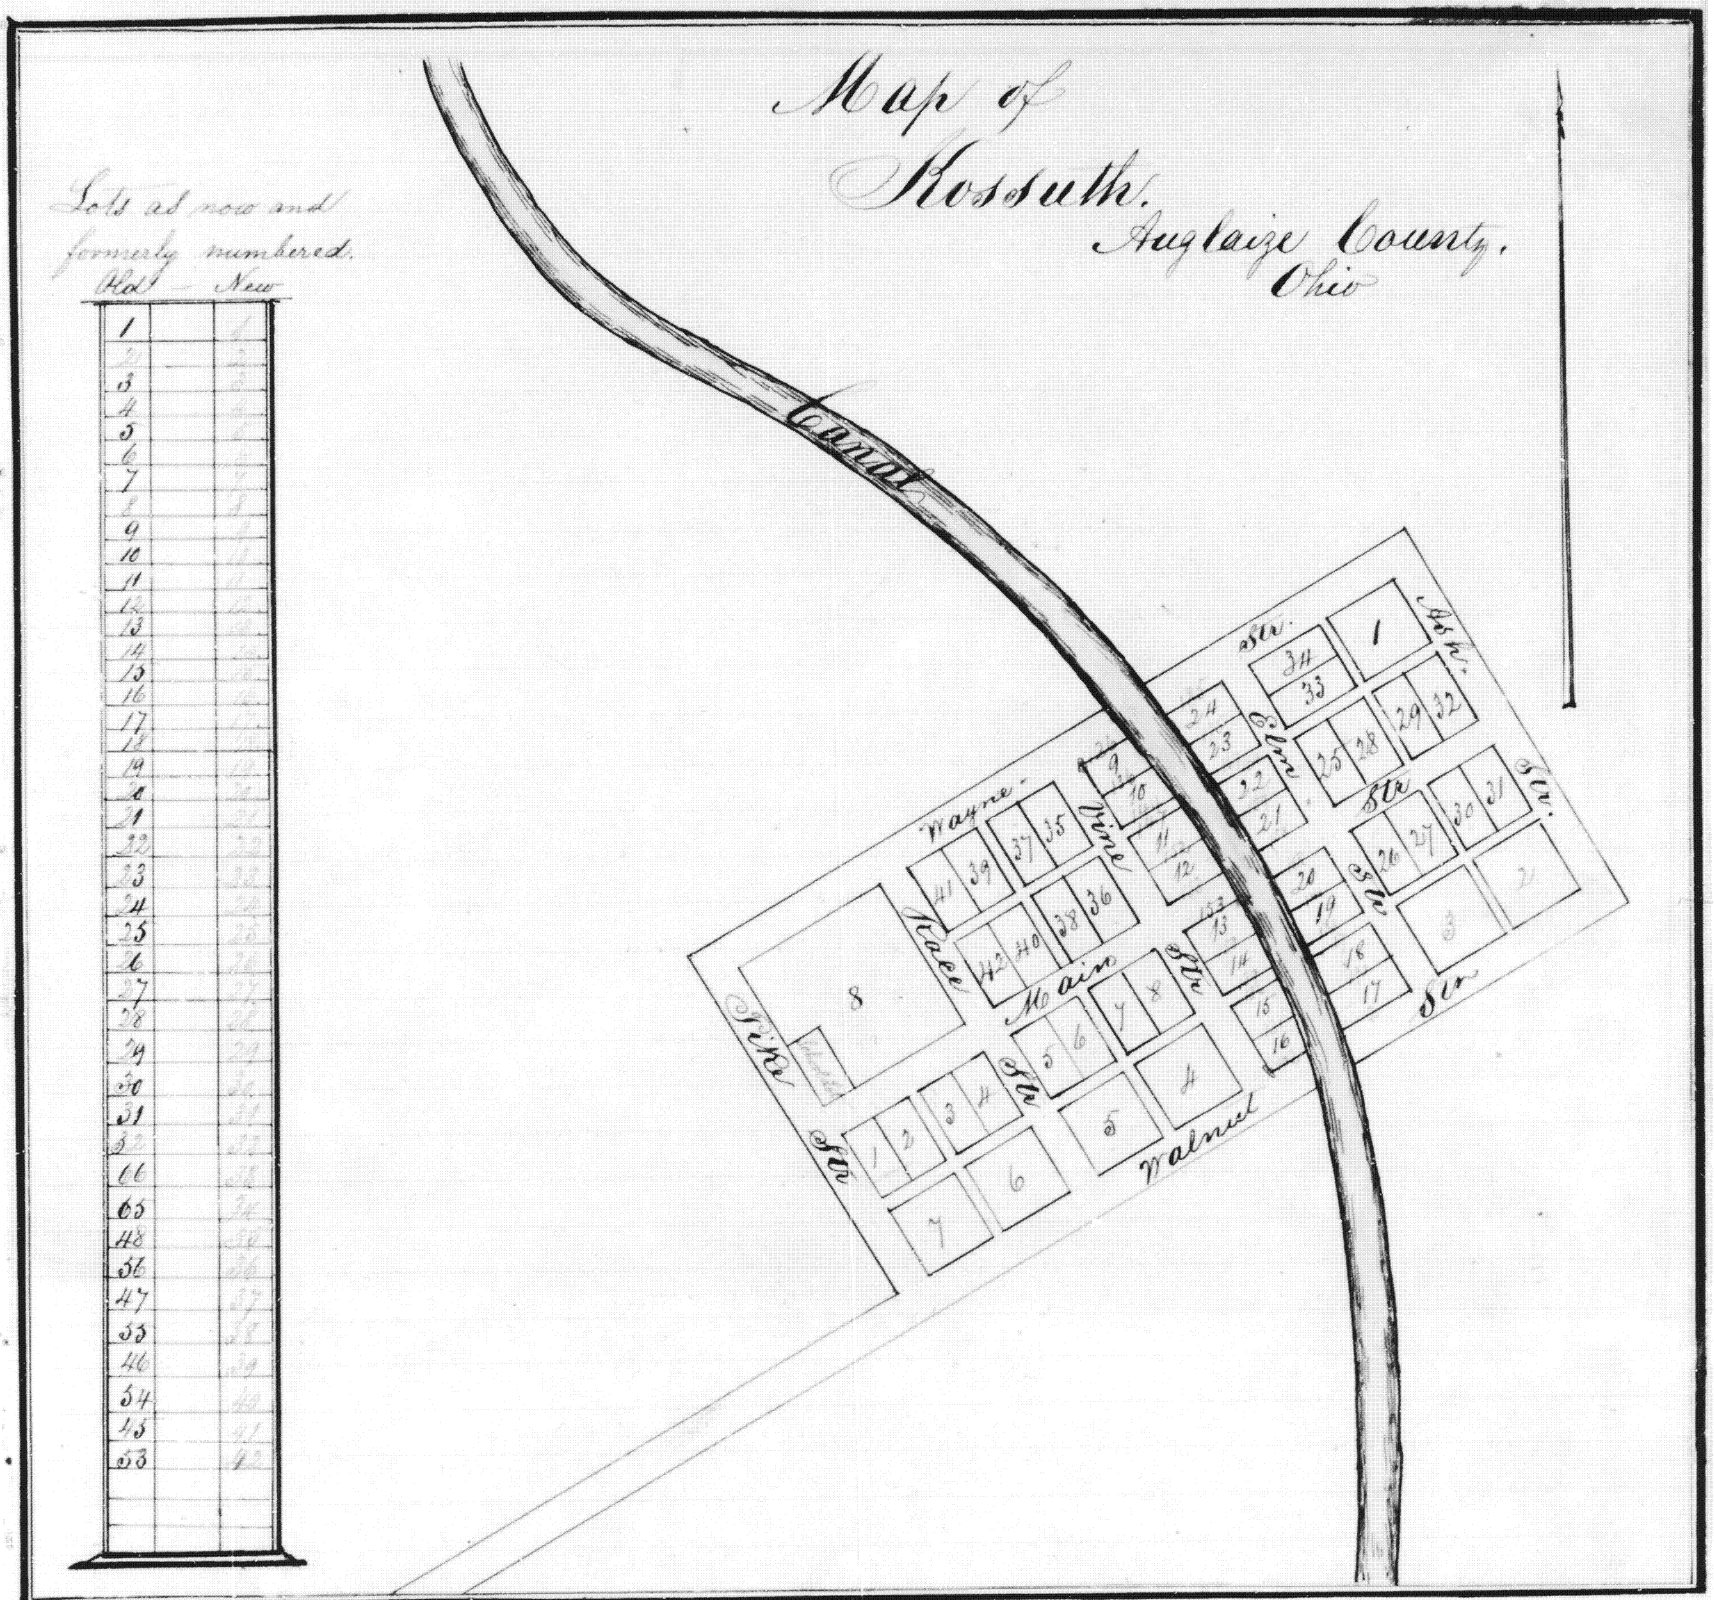

Notes. The Town of Rossuth is laid out on the east half of the S. W. qr. and the W. half of the S. E. quarter of Section twenty five, Township four of Range four east of first principal meridian; - it contains forty two lots, and eight out lots - all the lots except those adjoining the canal are each 66 feet wide and 132 feet long; the lots on the canal are the same width and the length of their sides in links is marked on the map with red ink. Mainstreet is 66 feet wide and bears S 60° W. all other streets are each 33 1/2 feet wide and run parallel or at right angles to Mainstreet as designated on the map; the Alleys are 16 1/2 feet wide. The out lots or blocks contain each the size of two full lots except No 8. which contains an amount equal to 7 lots. Corner stones at NW 9 and SW 16.

I certify the foregoing delineation and description to be correct. A.D. 1858. John S. Houston, Surveyor.

I Samuel Pettit do hereby certify that the above is a true map or plat of the Town of Rossuth as specified by said map. In Witness whereof I have hereunto set my hand and seal this 3^d day of March 1859.

Executed in presence of: J. F. McKinney. J. F. McKinney Samuel Pettit

The State of Ohio } Before me the undersigned, a Notary Public in and for said County personally
Miami County } came the above named Samuel Pettit and acknowledged the signing and sealing
of the above Certificate of Town Plat to be his voluntary act and deed for the uses and purposes therein
mentioned this 3^d day of March A.D. 1859.

for Witness whereof I have hereunto set my hand and seal this 3^d day of March 1859. J. F. McKinney, Notary Public.

Seal the day and year last above written. Edward Meyer, Recorder, Auglaize Co.

Filed for Record March 7th 1859. Recorded March 12th 1859.