


DATE	SYM	REVISION	RECORD	DR.	CK.

SUBDIVISION OF 153.878 ACRES FOR NORMAN FOUST
TOWN 4S~RANGE 5E~LOGAN TWP~AUGLAIZE CO.~OHIO
SECTION 19

N 0° 43' 20" W 2658.77 HALF SECTION LINE N 0° 31' W 409.64 N 0° 31' W 589.39

S.W. COR. SE. QTR. SEC. 19

DESCRIPTION OF 153.878 ACRES
Commencing at a railroad spike located at the S.W. corner of the S.E. quarter of Section 19, T-4-S, R-5-E, Logan Township, Auglaize County Ohio and being further described as follows:
Thence N 00° 43' 20" W, a distance of 2658.77 feet to the center of Section 19. Thence N 00° 31' W, a distance of 999.03 feet to an iron pin. Thence N 89° 30' E, a distance of 330.00 feet to an iron pin. Thence N 00° 31' W, a distance of 330.00 feet to a railroad spike in the center of C.R. # 228. Thence N 89° 30' E with the center of C.R. # 228, a distance of 983.45 feet to a railroad spike. Thence S 00° 47' 40" E, a distance of 1326.56 feet to an iron pin in the east-west half section line. Thence S 00° 54' 40" E, a distance of 165.00 feet to an iron pin. Thence N 89° 23' 30" E, a distance of 1331.50 feet to a railroad spike in the center of C.R. # 81 and the east line of Section 19. Thence S 00° 38' E with said center line and section line, a distance of 1163.11 feet to a railroad spike. Thence S 88° 59' W, a distance of 1077.35 feet to an iron pin. Thence S 00° 48' 30" E, a distance of 1315.24 feet to a iron pin in the south line of Section 19. Thence S 89° 08' W with the south line of Section 19 and the center of T.R. # 220, a distance of 1323.83 feet to a Railroad spike and PLACE OF BEGINNING.
Being subject to all legal easements and R/W of record.
Survey and Boundary description prepared by Thomas W. Steinke # 6177

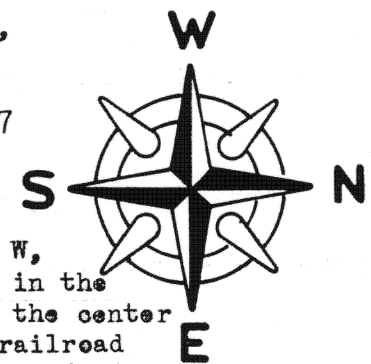

SCALE: 1"=200'

95.014 AC.

(6)

EFFLUENT FROM LOTS 1, 2, 3, 4, AND 5 TO DISCHARGE INTO STREAM RUNNING THROUGH LOT 6 AND 7

E OPEN DITCH

THE 100' SANITARY EASEMENT SHOWN HEREON IS FOR THE PURPOSE OF INSTALATION OF SANITARY EFFLUENT LINES TO THE OUTLET.

WE THE UNDERSIGNED, BEING THE OWNERS OF THE LAND HEREIN PLATTED, DO HEREBY ACCEPT AND APPROVE THE PLAT AS SHOWN HEREON.

John F. Conery
WITNESS
Martha Ingledue
WITNESS

Norman J. Foust
NORMAN J. FOUST
Mildred L. Foust
MILDRED L. FOUST


BEFORE ME, A NOTARY PUBLIC, PERSONALLY CAME THE ABOVE SIGNED WHO ACKNOWLEDGED THE SIGNING TO BE THEIR VOLUNTARY ACT AND DEED FOR THE PURPOSES THEREIN EXPRESSED.

IN WITNESS WHERE OF, I HAVE HEREUNTO SET MY HAND AND NOTORIAL SEAL THIS 6th DAY OF May 1976

John F. Conery
Notary Public, State of Ohio

I DO HEREBY CERTIFY THAT I HAVE SURVEYED THE PREMISES AND THE ATTACHED PLAT AND THAT SAID PLAT IS CORRECT

Thomas W. Steinke
THOMAS W. STEINKE
WAPAKONETA, OHIO



LEGEND
○=IRON PIN
●=R.R. SPIKE

33.664 AC.

(7)

AUGLAIZE CO. REGIONAL PLANNING COMMISSION
APPROVED THIS 22nd DAY OF JUNE 1976

J. Robert Jaynes
AUGLAIZE CO. BOARD OF HEALTH
I CERTIFY THAT THE RULES, REGULATIONS AND LAWS HAVE BEEN ADHERRED TO THIS 21st DAY OF JUNE 1976
Terry Wiggo

CR 81 AUGLAIZE CO. ENGINEER
APPROVED THIS 21 DAY OF June 1976
Clayton W. Himmel, P.E.
Vernon E. Daenges, Co Auditor

EISLEY ROAD AUGLAIZE CO COMMISSIONERS
APPROVED THIS 18th DAY OF June 1976
Howard Warner
William Link

PREPARED BY	THOMAS W STEINKE	SCALE	DRAWN BY
CHECKED BY	LAND SURVEYING	1"=200'	JOS
APPROVED BY			
TITLE	NORMAN FOUST T4S-R5E-SEC.19-LOGAN TWP		
DATE	5-6-76	DRAWING NUMBER	75-158